



LLW Linear Wrap

FEATURES

- 2' and 4' versions
- >110 lumens per watt
- Ideal replacement for less efficient fluorescent wrap fixtures
- Perfect for lower traffic areas
- Features full length wrap-around U-shaped prismatic acrylic lens

CERTIFICATIONS

- ETL Listed for damp locations (120-277V)
- UL Listed for damp locations (120-347V)
- DesignLights Consortium® Qualified - meets DLC requirements for efficacy and lumen maintenance

PERFORMANCE

- Rated lifetime L70: 50,000 hours
- 4000K CCT
- CRI: >80

ELECTRICAL

- Input voltage: 120-277V; 120-347V
- Power Factor: >0.9
- THD: <10%

THERMAL

- -4°F to 122°F (-20°C to 50°C) operating temperature

CONSTRUCTION

- Durable steel body construction with white polyester powder coat finish

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



APPLICATIONS

- Storage areas
- Utility rooms
- Schools
- Stairwell
- Workshops
- Corridors

CONFIGURATOR

MODEL	LUMENS	WATTS	CRI/CCT	VOLTAGE/DIMMING
LLW2 : Linear Wrap 2'	220 - 2,200 lm	20W - 20W	840 - 80CRI; 4000K	U - 100-277V; Non-Dimming
LLW4 : Linear Wrap 4'	350 - 3,500 lm	32W - 32W		
	440 - 4,400 lm	40W - 40W		
	528 - 5,280 lm	48W - 48W		
	368 - 3,500 lm	32W - 32W		HD - 120-347V; 0-10V Dimming
	460 - 4,600 lm	40W - 40W		
	552 - 5,520 lm	48W - 48W		

BUILD YOUR PART NUMBER :

			840	
--	--	--	-----	--




PERFORMANCE SUMMARY


ORDER CODE	ITEM #	WATTS	NOMINAL LUMENS	LPW	CCT	CRI	VOLTS	DIMMING	DLC*
11092	LLW2-220-20W-840-U	20W	2,200	110	4000K	>80	120-277V	Non-Dimming	✓
11093	LLW4-350-32W-840-U	32W	3,500	109	4000K	>80	120-277V	Non-Dimming	✓
11094	LLW4-440-40W-840-U	40W	4,400	110	4000K	>80	120-277V	Non-Dimming	✓
11095	LLW4-528-48W-840-U	48W	5,280	110	4000K	>80	120-277V	Non-Dimming	✓
11443	LLW4-368-32W-840-HD	32W	3,680	115	4000K	>80	120-347V	0-10V	✓
11444	LLW4-460-40W-840-HD	40W	4,600	115	4000K	>80	120-347V	0-10V	✓
11445	LLW4-552-48W-840-HD	48W	5,520	115	4000K	>80	120-347V	0-10V	✓

*Non-Dimming versions meet DLC v4.4; Dimming versions meet DLC v5.0

PRODUCT DIMENSIONS

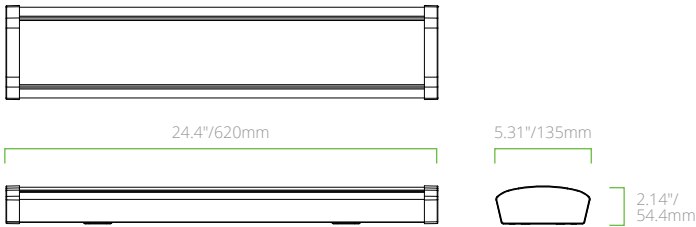

LLW2

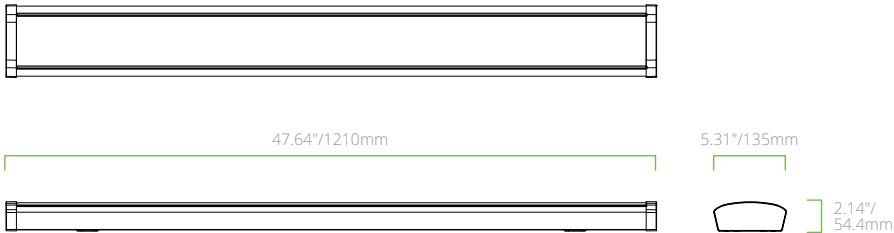


LLW4

PHOTOMETRICS


LLW2-220-20W-8xx-U (Typical performance @4000K)

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30	631.83	29.3%
0-40	1011.64	46.9%
0-60	1714.47	79.5%
0-80	2096.56	97.2%
0-90	2144.74	99.4%
60-80	382.09	17.7%
70-80	139.71	6.5%
80-90	48.19	2.2%
0-180	2157.2	100%




LLW4-350-32W-8xx-U (Typical performance @4000K)

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30	991.41	29.1%
0-40	1588.81	46.7%
0-60	2698.83	79.3%
0-80	3302.8	97.0%
0-90	3377.58	99.2%
60-80	603.97	17.7%
70-80	220.35	6.5%
80-90	74.78	2.2%
0-180	3405.01	100%



LLW4-440-40W-8xx-U (Typical performance @4000K)

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30	1308.95	29.1%
0-40	2097.19	46.7%
0-60	3561.00	79.2%
0-80	4357.91	97.0%
0-90	4456.32	99.2%
60-80	796.91	17.7%
70-80	290.67	6.5%
80-90	98.41	2.2%
0-180	4493.59	100%



LLW4-528-48W-8xx-U (Typical performance @4000K)

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30	1542.5	29.1%
0-40	2471.84	46.6%
0-60	4197.41	79.1%
0-80	5138.54	96.9%
0-90	5257.35	99.1%
60-80	941.13	17.7%
70-80	344.03	6.5%
80-90	118.81	2.2%
0-180	5304.93	100%

