

FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT
TYPE
PART NUMBER

FEATURES

Shallow depth construction provides for simple install and material management

Diverse controls compatibilities provide ease of mind in useability

Robust construction by use of pre painted steel sheet metal

Dependable light engine provided by LEDvance LED Boards and Xitanium LED Drivers

Expanse of light engine choices in addition to several possible options and adders



SPECIFICATIONS

CONSTRUCTION

Pre painted white steel utilizing screw fasteners

Pre painted aluminum LED gear pan for efficient heat dissipation

MOUNTING & INSTALLATION

Multiple hanging options including y toggle and rigid v hangers

Back mounted access plate for quick electrical connections

OPTICAL

Option for an evenly diffuse flat extruded acrylic lens

Low profile shallow design provides wide light distribution

ELECTRICAL

LED Light Engine designed for reliability and long life operation

Standard 0-10V dimming to 1% with other standards available

120 / 277 compatible with other voltages available

CONTROLS

Individual or grouping control with many brands available

For further in depth controls integrations, please see page 2


LISTINGS

DesignLights Consortium 5.1 qualified, see DLC QPL

ETL safety certified for damp locations

Standard 5 year warranty / 10 year warranty available upon request

DIMENSIONAL INFORMATION

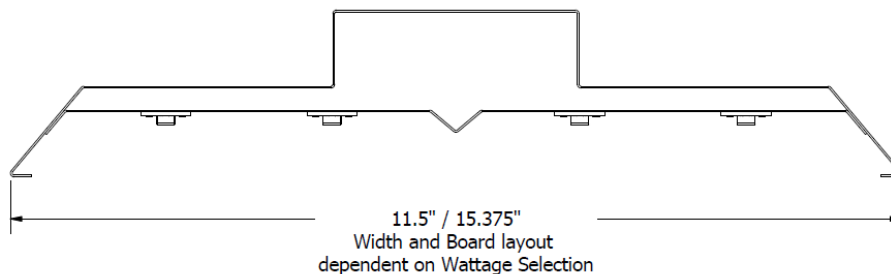

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060




ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE			COLOR TEMP	OPTIONS	OPTIONS (CONTINUED)
F FIXTURE	12HD 1' x 2'	1' X 2' OPEN / FROSTED	2' X 2' OPEN / FROSTED	2' X 4' OPEN / FROSTED	35 3500K	FR FROSTED LENS	8C8 8' CORD NO PLUG
	22HD 2' x 2'	F2V3 63W 9556 LUMENS 8600 LUMENS	F21L5 122W 18577 LUMENS 16724 LUMENS	F42M0 244W 37153 LUMENS 33448 LUMENS	40 4000K	SD STEP DIMMING (BI LEVEL OR TRI LEVEL)	8C1 8' CORD WITH PLUG
	24HD 2' x 4'	F2Y4 74W 11043 LUMENS 9942 LUMENS	F21M8 142W 21280 LUMENS 19158 LUMENS	F42C7 285W 42709 LUMENS 38450 LUMENS	50 5000K	LVD120 / 277 120V / 277V LINE VOLTAGE DIMMING	480T 480 VOLT (120V-277V STANDARD)
		F2C1 92W 14047 LUMENS 12646 LUMENS	F21Z2 184W 28094 LUMENS 25293 LUMENS	F43V4 368W 56189 LUMENS 50586 LUMENS		D PREWIRED FOR 0-10V DIMMING	DTOAUX DIM TO OFF AND 12V / 24V LED DRIVER
		F21I0 102W 15224 LUMENS 13944 LUMENS	F22I0 206W 31189 LUMENS 28079 LUMENS	F44X0 410W 62076 LUMENS 55886 LUMENS		EM EMERGENCY BACKUP INCLUDED (6W STANDARD)	OCC VARIOUS OCCUPANCY SENSORS AVAILABLE FOR VARIOUS CONTROL TYPES
						Y Y TOGGLE HANGERS	AVI AVI-ON WIRELESS CONTROLS VARIOUS OPTIONS, PLEASE SPECIFY COMPONENT CHOICES
							BABA BABA COMPLIANT

CUSTOM
OPTIONS

ADDITIONAL GRAPHICS

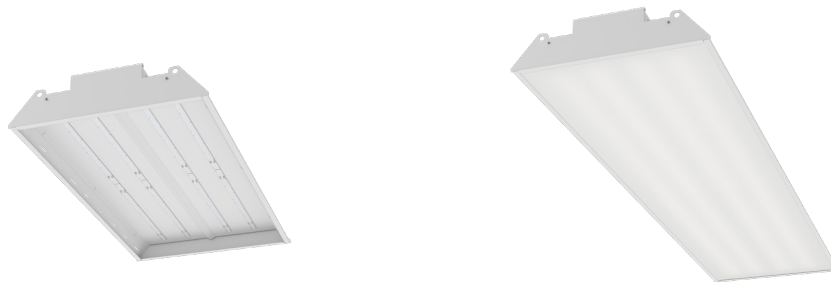

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

