



EOS LED RETROFIT KITS

- UL 1598 Classified Retrofit Kit
- AC Driver-On-Board Technology
- Data Per NVLAP Accredited Laboratory
- TRIAC Dimmable To 5%
- Energy Star CSD
- 5 Year Warranty



RoHS
compliant

SPECIFICATIONS

- Input Voltage: 120VAC; 50/60Hz
- 13W, 14W & 23W Models
- Available in 3000K or 4000K
- Constant current design
- High power factor > 0.98
- Estimated 50,000 hrs L70
- Max Lens Temp. (Tc): 80°C (see cut sheet for Tc location)
- Optical grade polycarbonate lens

- Standard mounting options for easy install
- Integrated powdercoated aluminum heat sink
- On board line surge protection
- Optional MOV ground surge protection
- 18" 18 AWG Leads
- UL 1598 Classified
- FCC compliance Class B

POWER OPTIONS @ 80CRI

13W EOS RETROFIT

910lm, 3000K = 70lm/W
1000lm, 4000K = 76lm/W


14W EOS RETROFIT

1350lm, 3000K = 96lm/W
1400lm, 4000K = 100lm/W

23W EOS RETROFIT

1850lm, 3000K = 80lm/W
1900lm, 4000K = 82lm/W

90CRI models special order

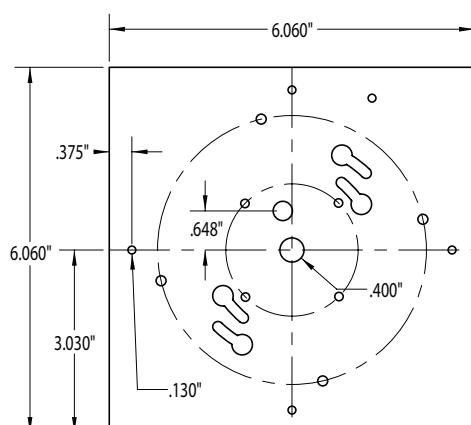

SL08-AC120R-W-M807PL
13W, 910LM, 3000K



SL12-AC120R-W-M807PL
14W, 1350LM, 3000K



SL18-AC120R-W-M807PL
23W, 1850LM, 3000K



SL08-AC120R-C-M807PL
13W, 1000LM, 4000K



SL12-AC120R-C-M807PL
14W, 1400LM, 4000K



SL18-AC120R-C-M807PL
23W, 1900LM, 4000K

PART NUMBER GUIDE

SL08 - AC120R - W - M807PL - M

SL08 13W
SL12 14W
SL18 23W

AC120R INPUT VOLTAGE

W 3000K
C 4000K

M807PL HEAT SINK #

OPTIONAL
M
MOV SURGE
PROTECTION