

Key Features & Benefits:

- Multiple Mounting Options Designed to Retrofit
 - Street Lights
 - High Bays / Low Bays
 - Garage Lights
 - Shoe Box Fixtures
 - Wall Packs
- Utilize Existing Fixture
- 10 Year Warranty
- Optimized Pin Array Heatsink
- Overheat Shutdown
- L70 Lifetime >100,000 Hours
- Intelligent Thermal Control
- Compatible with Networked Lighting Control Qualified Systems



Project: _____

Date: _____

Catalog #: _____

Notes: _____



Technical Specifications:

Light Specifications

Lumen Output: Up to 41,062 Lumens
 Efficacy (lm/W): Up to 145 Lumens per Watt
 Kelvin: 3000K, 4000K, 5000K
 CRI: >75
 Rated Life (hrs): 100,000 Hours
 IES Classification: Fixture Dependant
 Dimensions (LxWxH): 11.6" x 9.0" x 3.4"
 Weight Without Driver (lbs): 4.2

Driver Specifications

Power: 280 Watts
 Input Voltage: 120-277 VAC | HV - 347-480 VAC
 Input Current @120V: 2.92A
 Input Current @277V: 1.26A
 Input Current @480V: 0.73A
 Operating Temperature: -40°F to 176°F (-40°C to 80°C)



Retrofit Kits for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires

Integrated-style kits that replace all reflectors and optical systems of existing luminaires. Not screw-in "lamps" intended as HID replacements.



ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE (PREMIUM)
ESL-MUR-280W-330	280W	33,493	117	3000K	P8HJV3SF
ESL-MUR-280W-340	280W	34,597	120	4000K	PAXMRCJ1
ESL-MUR-280W-350	280W	35,701	124	5000K	P2KBWT1Q
ESL-MUR-280W-330-HV	280W	34,434	119	3000K	PPB26HZM
ESL-MUR-280W-340-HV	280W	35,335	122	4000K	P2HTTM1H
ESL-MUR-280W-350-HV	280W	36,235	125	5000K	P23BPCPA




Retrofit Kits for High-Bay Luminaires for Commercial and Industrial Buildings

Integrated-style kits that replace all reflectors and optical systems of existing luminaires. Not screw-in "lamps" intended as HID replacements



ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE (STANDARD)
ESL-MUR-280W-330	280W	38,216	138	3000K	PD2TJ13V
ESL-MUR-280W-340	280W	39,110	141	4000K	PKZQ14CT
ESL-MUR-280W-350	280W	40,004	144	5000K	PEL4G1MP
ESL-MUR-280W-330-HV	280W	39,409	139	3000K	PEQVSD5E
ESL-MUR-280W-340-HV	280W	40,230	142	4000K	PMVVLG4P
ESL-MUR-280W-350-HV	280W	41,062	145	5000K	P0IBIJ9I

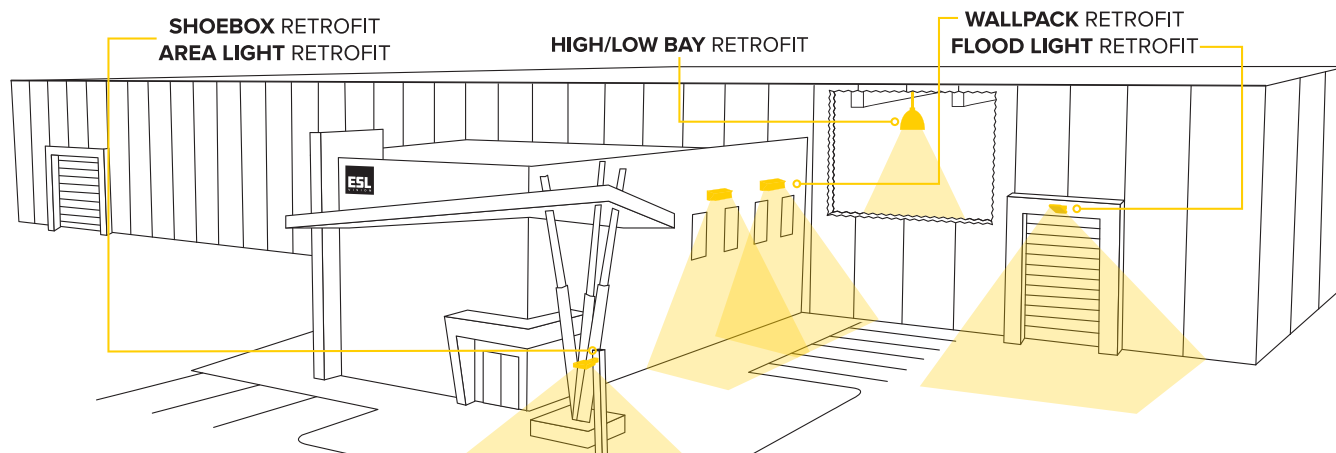

Ordering Guide:

Example Part Number: **ESL-MUR-280W-330-HV**

ESL	MUR	280W	3			
ESL	TYPE	WATTS	GENERATION	KELVIN	VOLTAGE	OPTIONS
	MUR (Multi-Use Retrofit)	280W (280 Watts)	3 (3rd Generation)	30 (3000 Kelvin) 40 (4000 Kelvin) 50 (5000 Kelvin) Amber Options Available*	Leave Blank (120-277 VAC) HV (347-480 VAC)	

*Please see www.eslvision.com for more details

Options (Add as Suffix):

ESL-3OCC

ESL-3OCCB

ESL-4OCC-LDD

ESL-SPD-277-1

ESL-REM-100

IP65 0-10v Dimming Sensor. 8'- 50' Mounting, Wire From Side

IP65 0-10v Dimming Sensor. 8'- 50' Mounting, Wire From Top

Photocell/Occupancy Sensor for Standard Mounting, Dip Switch, 0-10v


Hard Wire Surge Protector; (100-277 VAC) Max Discharge Current: 20kA

Hand Held Remote to Program 2OCC-HDD, 3OCC/B and 4OCC-LDD


What's Included:

- (1) LED MUR
- (1) LED Outdoor Driver
- Assembled Mounting Hardware
 - U-Bracket
 - L-Bracket
- Additional Mounting Hardware
 - Hanger Block
 - L-Plate
 - Small Plate
 - Large Plate


U-Bracket

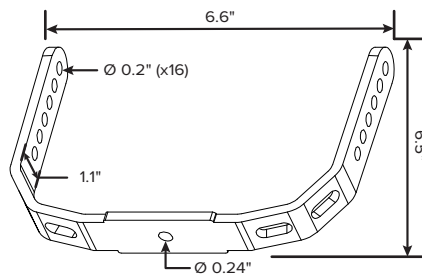


L-Bracket

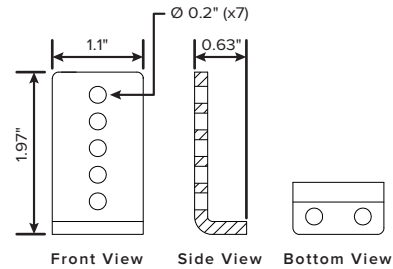


Hanger Block




L-Plate

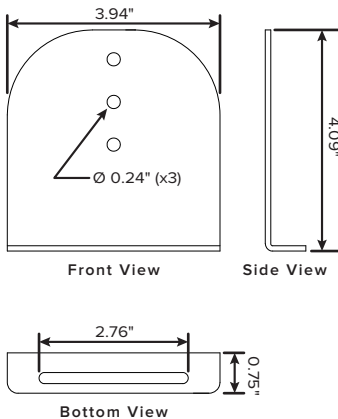

Small Plate

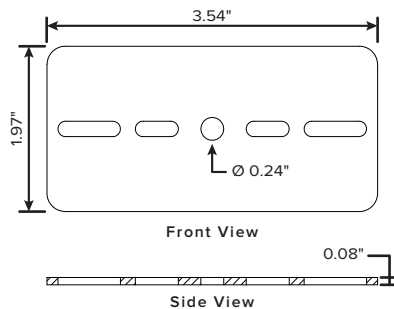

Large Plate

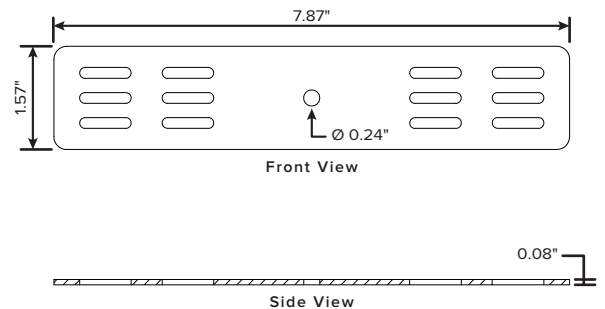

Dimensions:

