




MUR SERIES APPLICATIONS

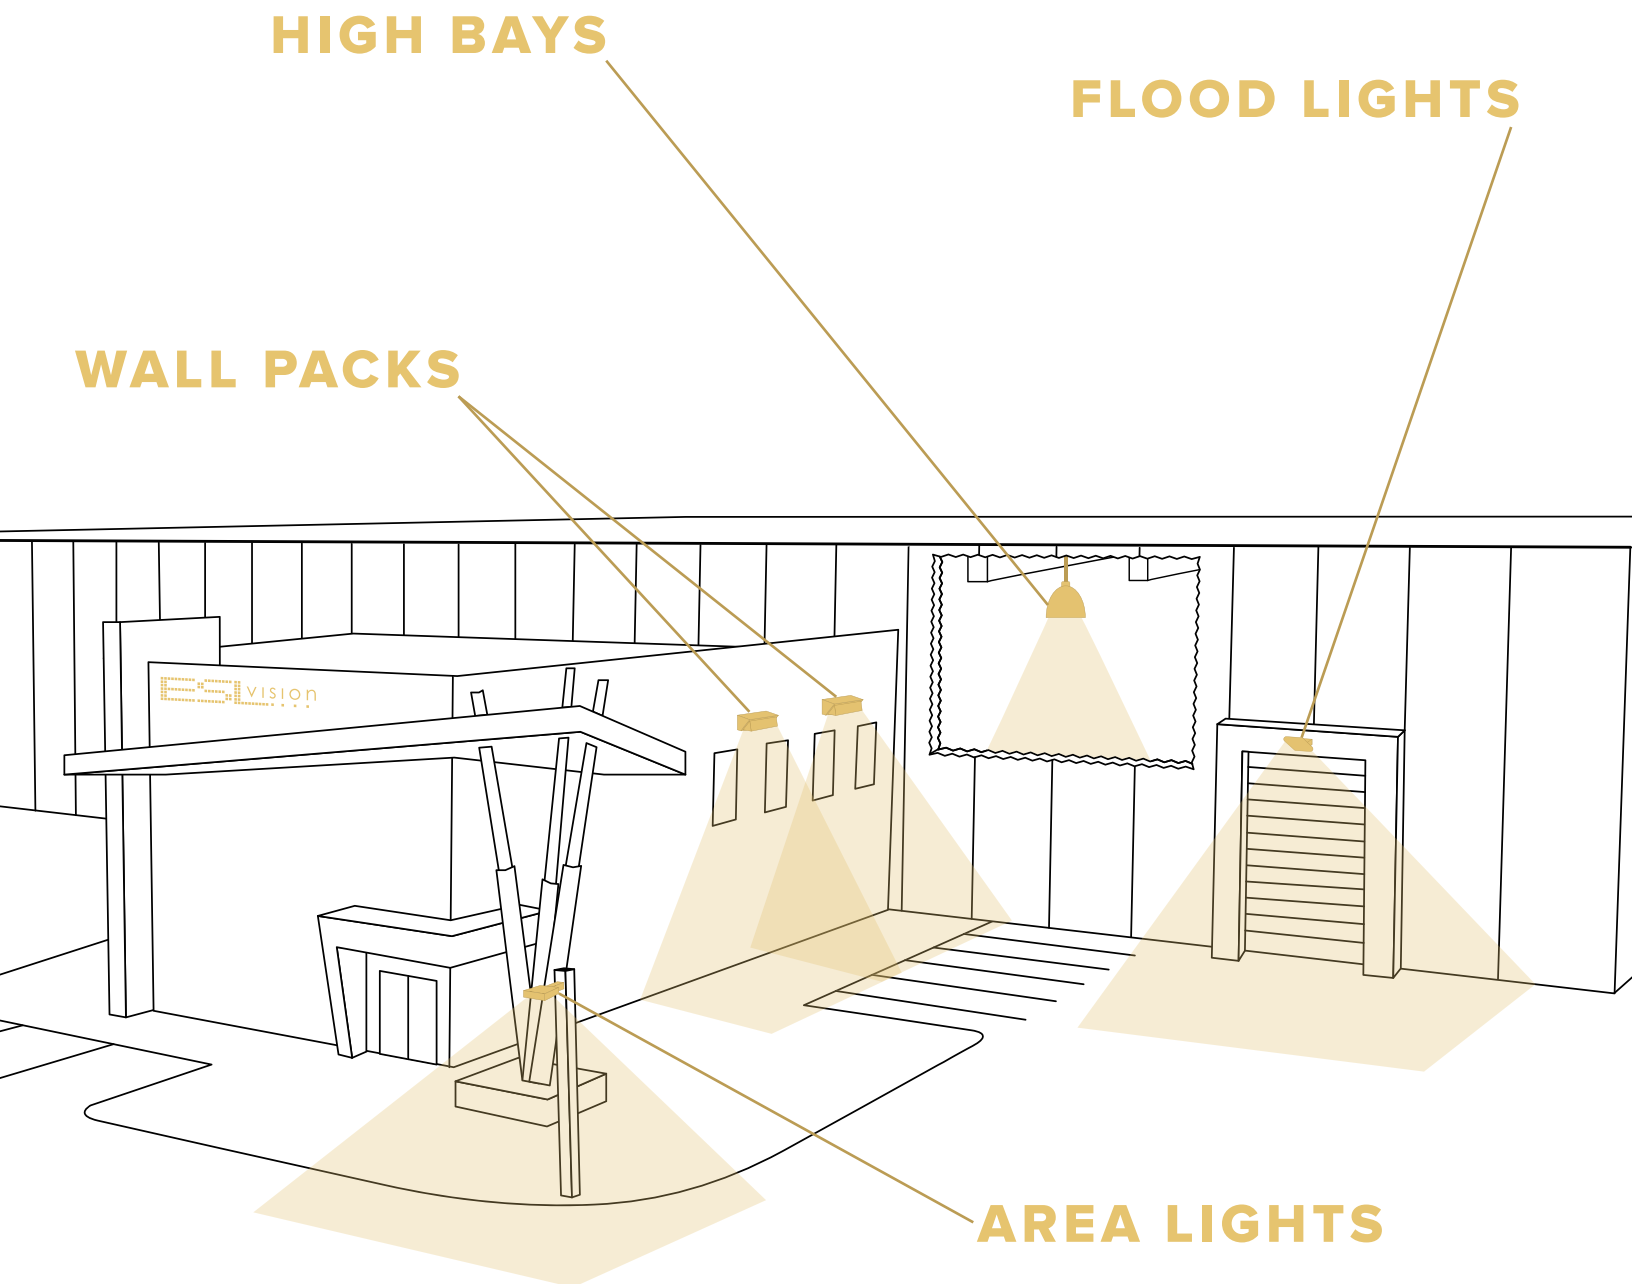

MULTI-USE RETROFIT

Key Features & Benefits

- Multiple Mounting Options
Designed To Retrofit:
 - Street Lights
 - High Bays/Low Bays
 - Garage Lights
 - Shoe Box Fixtures
 - Wall Packs
- Utilize Existing Fixture
- 10 Year Warranty
- Environmentally Friendly:
 - No Mercury
 - No Hazardous Substances
 - Up To 75% Energy Savings
- Optimized Pin Array Heat Sink
- High Efficacy, Up To 135 Lumens Per Watt
- L70 Lifetime>100,000+ Hours



APPROXIMATE EQUIVALENCIES

MUR SERIES	INCANDESCENT	HPS/HID	CFL
ESL-MUR-45W	300 WATTS	150-200 WATTS	85 WATTS
ESL-MUR-75W	500 WATTS	150-250 WATTS	105 WATTS
ESL-MUR-105W	600 WATTS	250 WATTS	150 WATTS
ESL-MUR-120W	850 WATTS	320-400 WATTS	200 WATTS
ESL-MUR-150W		400 WATTS	
ESL-MUR-200W		750-1000 WATTS	
ESL-MUR-350W		1000-1500 WATTS	



MUR - 45 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-45W-330	5640	125	120-277 VAC	3000K	>75	N/A
ESL-MUR-45W-340	5850	130	120-277 VAC	4000K	>75	PREMIUM P28JJXW1
ESL-MUR-45W-350	5990	133	120-277 VAC	5000K	>75	PREMIUM PGFNM2CG
ESL-MUR-45W-330-HV	5640	125	180-528 VAC	3000K	>75	N/A
ESL-MUR-45W-340-HV	5850	130	180-528 VAC	4000K	>75	PREMIUM PYG4XRQM
ESL-MUR-45W-350-HV	5990	133	180-528 VAC	5000K	>75	PREMIUM P27V8XW5

MUR - 75 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-75W-330	9240	123	120-277 VAC	3000K	>75	N/A
ESL-MUR-75W-340	9360	125	120-277 VAC	4000K	>75	PREMIUM PVWHF7PQ
ESL-MUR-75W-350	9420	126	120-277 VAC	5000K	>75	PREMIUM P1JKA8C
ESL-MUR-75W-330-HV	9240	123	180-528 VAC	3000K	>75	N/A
ESL-MUR-75W-340-HV	9360	125	180-528 VAC	4000K	>75	PREMIUM P18HFJYG
ESL-MUR-75W-350-HV	9420	126	180-528 VAC	5000K	>75	PREMIUM P7VXZ239

MUR - 105 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-105W-330	13550	129	120-277 VAC	3000K	>75	N/A
ESL-MUR-105W-340	14025	134	120-277 VAC	4000K	>75	PREMIUM PXNMF2MF
ESL-MUR-105W-350	14320	136	120-277 VAC	5000K	>75	PREMIUM PEP5JSKS
ESL-MUR-105W-330-HV	13550	129	180-528 VAC	3000K	>75	N/A
ESL-MUR-105W-340-HV	14025	134	180-528 VAC	4000K	>75	PREMIUM PF6B3MHT
ESL-MUR-105W-350-HV	14320	136	180-528 VAC	5000K	>75	PREMIUM PRSRK2AW



MUR - 120 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-120W-330	15245	127	120-277 VAC	3000K	>75	N/A
ESL-MUR-120W-340	15880	132	120-277 VAC	4000K	>75	PREMIUM PSQZC6DG
ESL-MUR-120W-350	16210	135	120-277 VAC	5000K	>75	PREMIUM PJSMFJPY
ESL-MUR-120W-330-HV	15245	127	180-528 VAC	3000K	>75	N/A
ESL-MUR-120W-340-HV	15880	132	180-528 VAC	4000K	>75	PREMIUM PA2JNQHJ
ESL-MUR-120W-350-HV	16210	135	180-528 VAC	5000K	>75	PREMIUM P3C4FEDY



MUR - 150 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-150W-330	19005	127	120-277 VAC	3000K	>75	N/A
ESL-MUR-150W-340	19510	130	120-277 VAC	4000K	>75	PREMIUM PADDSX8S
ESL-MUR-150W-350	19940	133	120-277 VAC	5000K	>75	PREMIUM PXWZ8WQD
ESL-MUR-150W-330-HV	19005	127	180-528 VAC	3000K	>75	N/A
ESL-MUR-150W-340-HV	19510	130	180-528 VAC	4000K	>75	PREMIUM PJTJMV3A
ESL-MUR-150W-350-HV	19940	133	180-528 VAC	5000K	>75	PREMIUM P5CUQWCA

MUR - 200 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-200W-330	25840	129	120-277 VAC	3000K	>75	N/A
ESL-MUR-200W-340	26375	132	120-277 VAC	4000K	>75	PREMIUM PRDGUYUM
ESL-MUR-200W-350	26670	133	120-277 VAC	5000K	>75	PREMIUM PAR48ZZ8
ESL-MUR-200W-330-HV	25840	129	180-528 VAC	3000K	>75	N/A
ESL-MUR-200W-340-HV	26375	132	180-528 VAC	4000K	>75	PREMIUM P82PW7A9
ESL-MUR-200W-350-HV	26670	133	180-528 VAC	5000K	>75	PREMIUM P7371ZU3

MUR - 350 WATT



PRODUCTS	TOTAL LUMENS	EFFICACY (lm/W)	INPUT VOLTAGE	CORRELATED COLOR TEMPERATURE (CCT)	COLOR RENDERING INDEX (CRI)	DLC QPL CODE
ESL-MUR-350W-330	41955	120	120-277 VAC	3000K	>75	N/A
ESL-MUR-350W-340	42365	121	120-277 VAC	4000K	>75	PREMIUM P3RD9TYA
ESL-MUR-350W-350	43085	123	120-277 VAC	5000K	>75	PREMIUM P8J9V1WW
ESL-MUR-350W-330-HV	41955	120	180-528 VAC	3000K	>75	N/A
ESL-MUR-350W-340-HV	42365	121	180-528 VAC	4000K	>75	PREMIUM PU44ZSCZ
ESL-MUR-350W-350-HV	43085	123	180-528 VAC	5000K	>75	PREMIUM PQXZRG13





www.eslvision.com
888.493.5559