


SPECIFICATION SHEET: FHSKITT03LNF



Project	Type	Model #	
-	; -		

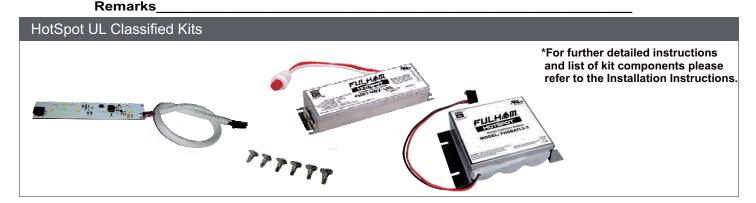

Specification:

INPUT VOLTAGE 120V - 277V ± 10%, 47-63Hz

SURGE PROTECTION C62.41 (TVS)

OVER CURRENT PROTECTION FUSE

INPUT CURRENT 0.07A INPUT POWER <4W

LUMEN OUTPUT 450 LUMENS

MAXIMUM OUTPUT CURRENT 3.5 AMP WHEN USED WITH # FHSBATT3-F7

OUTPUT VOLTAGE 3.6\

OUTPUT SHORT CIRCUIT PROTECTION SELF RESETTING PTC

RECHARGE TIME REQUIRED 24 HRS

BATTERY TYPE NiCd 3.6VDC


BATTERY CAPACITY AVAILABLE 7Ah


ILLUMUNATION TIME MINIMUM 90 MIN

ESTIMATED RUN TIME 360 MIN

OUTPUT CLASSIFICATION UL 1310 / CLASS 2

AMBIENT TEMPERATURE 0°C - 50°C WARRANTY 5 YEARS

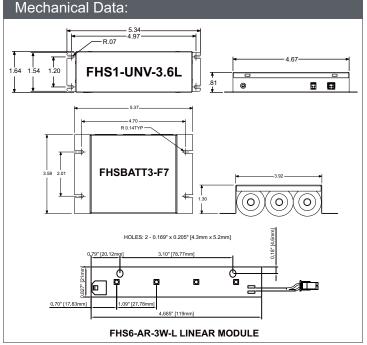

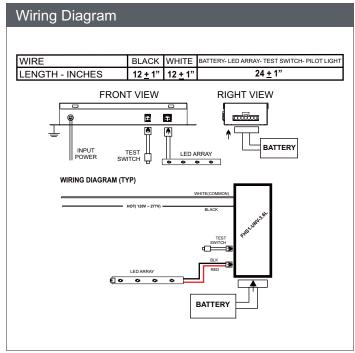

This product does not meet CEC Title 20 Code of Regulations. Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>5 years</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) **Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**

2016 REV B