



## SPECIFICATION SHEET : **SC-230-287-CUV-R**

This Is An Original Product From Fulham Co., Inc

RoHS  
COMPLIANT

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,**

**This Ballast Will Operate Following Lamps.**




**180mm T5 UV / 287mm T5 UV**

### ELECTRICAL DATA

INPUT VOLT: 230V $\pm$ 10%, 50/60Hz								
LAMP WATTS/TYPE	180mm T5 UV	287mm T5 UV	-	-	-	-	-	-
LAMPS OPERATED	1	1						
INPUT WATTS	11.40	15.77						
LINE CURRENT:	0.096	0.136						
POWER FACTOR	0.522	0.501						
BALLAST FACTOR	0.842	0.939						
EFFICACY FACTOR	7.390	5.950						
THD	157.70	165.60						
CURRENT CREST FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A							
SOUND RATING	"A"							
BALLAST TYPE	RAPID START							
VOLTAGE TRANSIENTS	ANSI 62.41							
INPUT/PROTECTION	FUSE							
OUTPUT/PROTECTION	EOL							
MIN. OPERATING TEMP	0 $^{\circ}$ C ( 32 $^{\circ}$ F )							
MAX. CASE TEMP	75 $^{\circ}$ C ( 167 $^{\circ}$ F )							
APPROVALS/CLASS	cULus LISTED, CLASS " P ", 1 OUTDOOR							


### MECHANICAL DATA

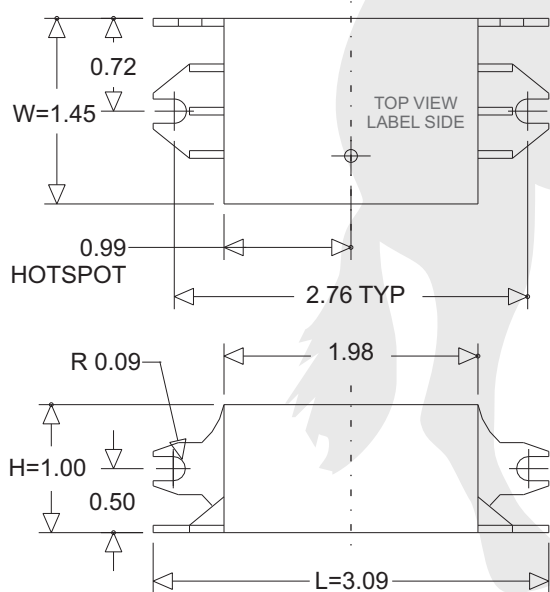

Where : L = Length, W = Width, H = Height

### WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 $\pm$ 1"	12 $\pm$ 1"	8 $\pm$ 1"	8 $\pm$ 1"		

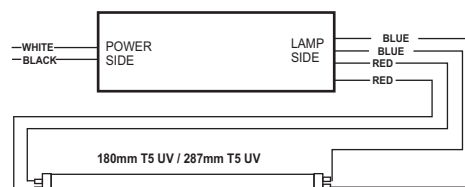

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**

2011-295 REV A