



GE
Lighting

78524 - GE HID Distributor Replacement Kit Magnetic Core & Coil Ballast

GEM1000TRIAC5-5

- Magnetic ballast construction ideal for a wide variety of lighting applications.
- Precision-wound coils, ensuring even heat dissipation and the highest electrical integrity.
- Distributor replacement kit contains the appropriate core & coil with color coded leads, a properly rated capacitor and ignitor (if required) and all other components required for ballast replacement
- Tri-Tap ballast (120, 277, 347)

Product Photo



GENERAL CHARACTERISTICS

Ambient Temp [Max]	200 °C
Ballast Factor	Normal
Ballast Type	Core and Coil
Capacitor Temp Rating	105 °C
Case Temperature (Max)	105 °C
Circuit Type	CWA
Insulation Class	200C
Line Voltage Regulation (+/-)	10%
Classification (Regulations)	cUL Listed UL Listed Replacement kit Oil filled High Intensity Discharge
Type	
Type of Capacitor	
Product Technology	

PRODUCT INFORMATION

Product Code	78524
Description	GEM1000TRIAC5-5
Alternative Unit Of Measure	EACH
Standard Package Quantity	2
Ean UPC	043168785242
Standard Package GTIN	00043168785242
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	2
Sales Unit	Each
UCC	043168785242
Alternative Unit Of Measure	CASE
Standard Package Quantity	
Ean UPC	043168785242
Standard Package GTIN	10043168785249
No Of Items Per Sales Unit	
No Of Items Per Standard Package	
Sales Unit	Case
UCC	043168785242

DIMENSIONS

Diameter	2.0
Weight	24.1 lb
Exit Type	

ELECTRICAL CHARACTERISTICS



Capacitance	24
Supply Current Frequency<Min>	60
Voltage<Min>	450 V


SAFETY & PERFORMANCE

- cUL_Listed
- UL_Listed

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)	Crest Factor (<=)	THD% (<=)	Min. Starting Temp (F/ C)
M47	1	120	1080	9.5	1.0		90.0			-20
M47	1	277	1080	4.0	1.0		90.0			-20
M47	1	347	1080	3.3	1.0		90.0			-20



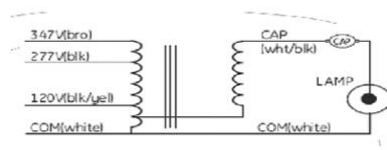

Feb 13, 2018 1:32:23 PM For additional information, visit www.gelighting.com