



JS LED®

ECO Lighting Technology and Solutions

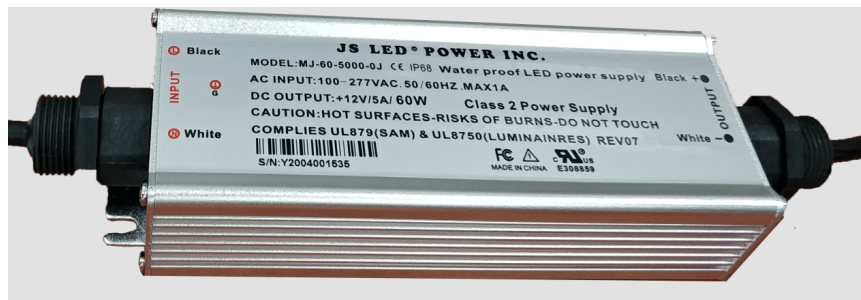

LED Driver

Model No. MJ-60-5000-OJ



FG/ $\perp$ (Green)
AC/N(White)
AC/L(Black)
+V(Black)
-V(White)

UL[®]
C_{US}
E308859

IP68 CE RoHS

Features

- IP68 design for indoor or outdoor installations
- Protections: Short circuit / Overload/Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- IP68 waterproof
- Meet the standard of world lighting safety
- Suitable for LED lighting
- Products through CE, RoHS, UL Certification

Please visit jsledpower.com for more information

For support please call toll free number 1-800-909-5188

Headquarter Office

1318 Maine Ave.,
Baldwin Park, CA 91706
Tel: (626) 338 - 8291
Fax: (626) 338 - 8391

Texas Branch

2307 Shaver St.,
Pasadena, TX 77502
Tel: (832) 270 - 1556


New Jersey Branch

600 Deer Rd., Suite #3
Cherry Hill, NJ 08034
Tel: (646) 287 - 5979


Florida Branch

4333 Silver Star Rd., Suite #170
Orlando, FL 32808
Tel: (407) 808 - 9768

MODEL		MJ-60-5000-OJ				
OUTPUT	DC VOLTAGE	12V				
	RATED CURRENT	5A				
	CURRENT RANGE	0~5A				
	RATED POWER	60W				
	RIPPLE & NOISE (max.) ^{NOTE 2}	200mV				
	VOLTAGE TOLERANCE ^{NOTE 3}	±2%				
	LINEAR REGULATION	±1%				
	LOAD REGULATION	±2%				
INPUT	VOLTAGE RANGE	100-277VAC				
	FREQUENCY RANGE	50 ~ 60Hz				
	POWER FACTOR (Typ.)	PF>0.6/110VAC				
	EFFICIENCY (Typ.)	88%				
	AC CURRENT (Typ.)	1A/110VAC				
	INRUSH CURRENT (Typ.)	COLD START 100A/110VAC				
PROTECTION	Short circuit	Protection type : recovers automatically after fault condition is removed				
	Overload	overload protected @ 115-140% above peak rating				
	Over temperature	Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	WORKING TEMP.	-30 ~ +50°C (Refer to output load derating curve)				
	WORKING HUMIDITY	20 ~ 99% RH non-condensing(Waterproof)				
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 99% RH				
SAFETY & EMC	SAFETY STANDARDS	UL				
	WITHSTAND VOLTAGE	I/P-O/P: 1.5KVAC I/P-GND:1.5KVAC				
	EMC Test Standards	EN55015 : 2013;EN61547 : 2009; EN61000-3-2:2014; EN61000-3-3:2013				
NOTE	1. All parameters NOT specially mentioned are measured at 110VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 10uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation.					

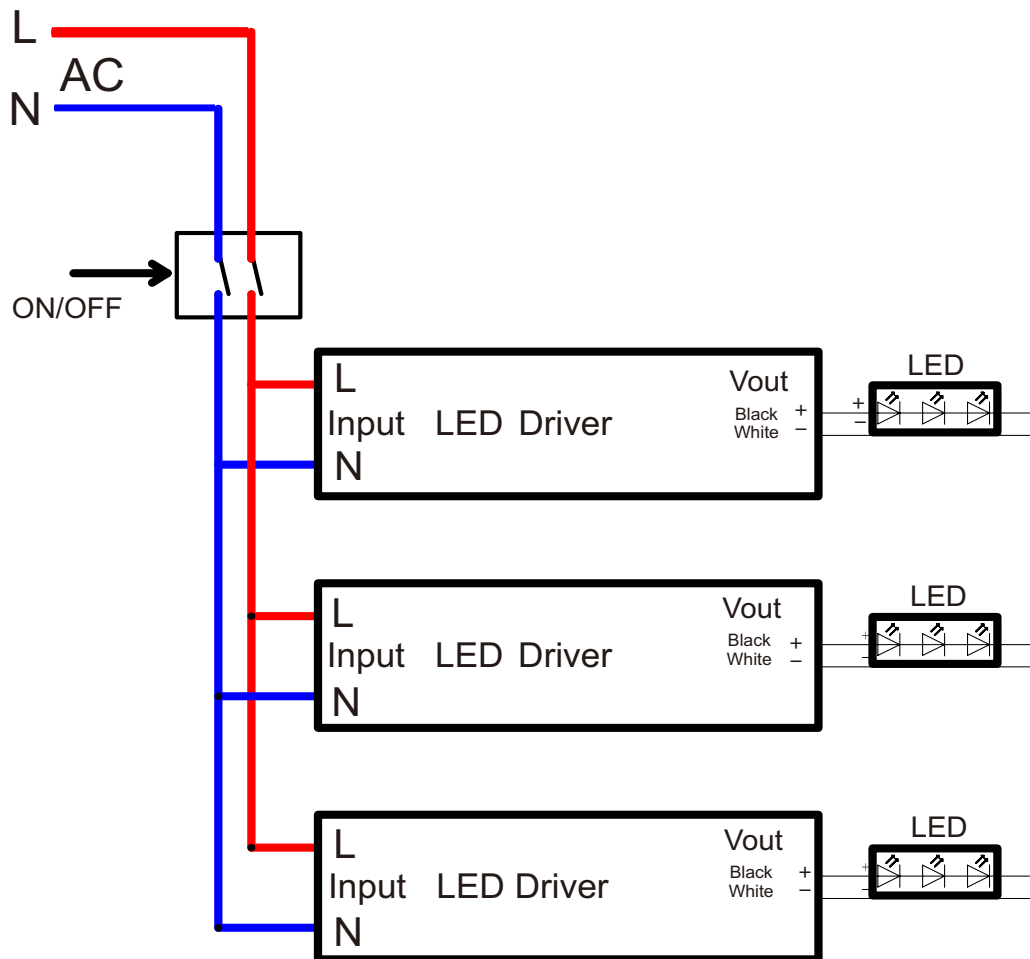

 Mechanical Specification

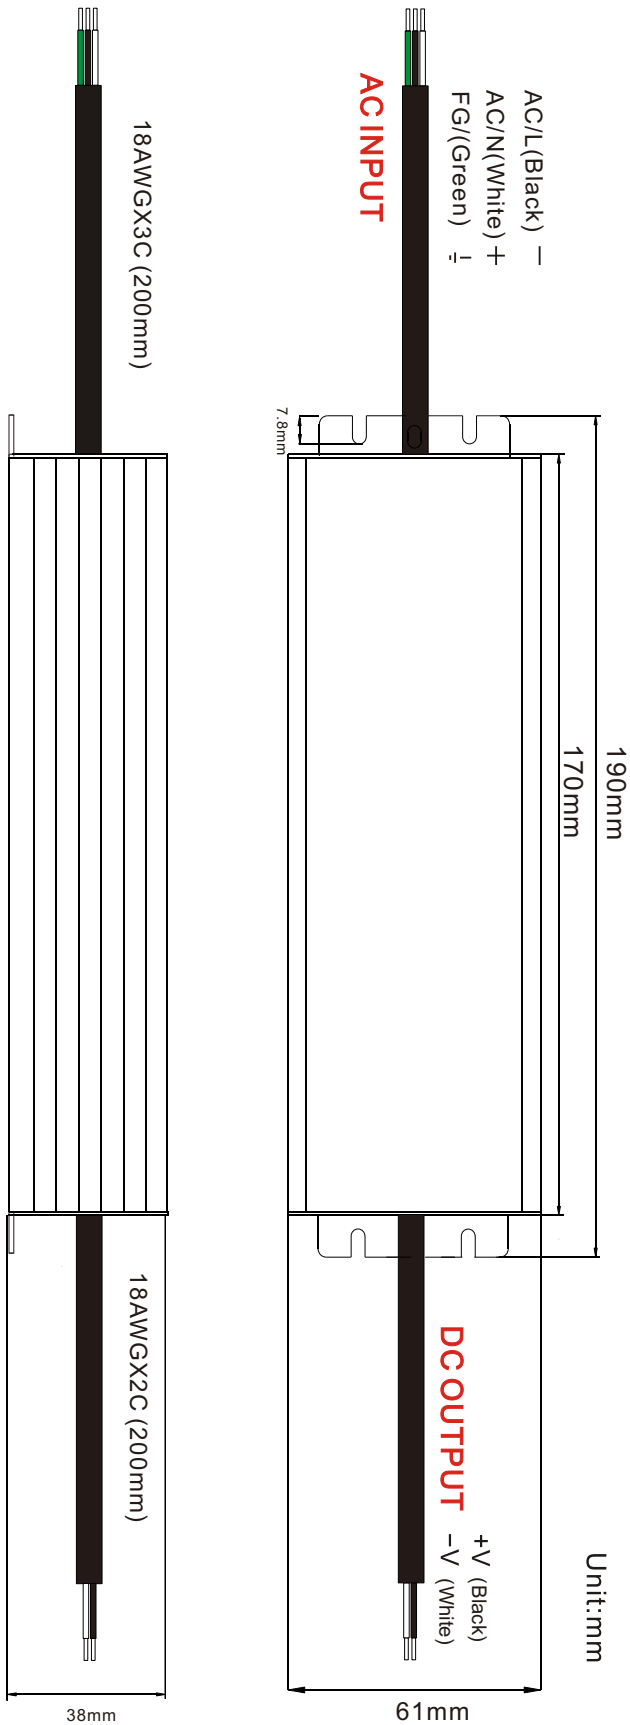

 Others

DIMENSION	175X56X31 (mm) (L×W×H)
CARTON QUANTITY	15PCS/Carton
CARTON SIZE	398*268*158mm
WEIGHT	9.7Kg/G.W

 Derating Curve

