

T8 15W 4FT. DIR TITANIUM LED SERIES



PRO



DIRect


15W REPLACES



**32W
Fluo.**

60% Energy Savings

- Compatible with Instant Start & Programmed Start ballasts
- Easy to install - Plug & Play Direct
- Exceptional efficacy 137 LPW
- Suitable for use in totally enclosed fixtures
- End-to-end lighting with no dark spots
- Dimmable



LM 79

LM 80

TM 21



TUBE FEATURES

Extra Wide Beam Design - Frosted Glass Body

This lamp uses an innovative glass design that diffuses heat and light more evenly. As a result of its compact light engine, this lamp produces a light emitting area of 310°. This wider beam angle improves a fixture's total light distribution and creates a more complete lighting effect.



Lamp Front View




Lamp Back View

End-to-End Lighting - Micro-Designed Driver

GREEN CREATIVE



Other LED Tubes

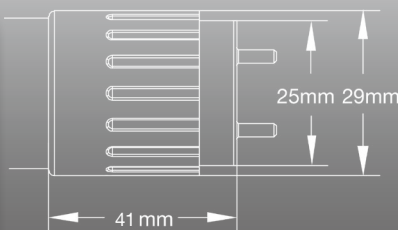

The lamp's micro-designed driver is located within the tube end cap which allows for better thermal performance and no dark spots. The result is powerful and seamless light from end to end.

T8 15W 4FT. DIR TITANIUM LED SERIES



SPECIFICATIONS**

Product Model	97833 15T8/4F/840/DIR	97834 15T8/4F/850/DIR
Type	T8	T8
Base	Medium Bi-Pin G13	Medium Bi-Pin G13
Power (W)	15	15
Voltage - Frequency	120-277V 50-60Hz	120-277V 50-60Hz
Color Temp. (ANSI)	Natural White 4000K	Daylight 5000K
CRI (Ra)	80	80
Typical lumens (lm)	2050	2050
Efficacy (LPW)	137	137
Light Emitting Area	310°	310°
Beam Angle	180°	180°
Dimmable	Yes	Yes
Power Factor	0.9	0.9
THD	<20%	<20%
Rated Lifetime - L70 (hrs.)	50,000	50,000
Dia. x MOL	1.14"x47.76" (29x1213mm)	1.14"x47.76" (29x1213mm)
Weight (lb. / g)	0.67lb. / 304g	0.67lb. / 304g

BALLAST PERFORMANCE

Ballast Factor	Bare Lamp (W)	System (W)	4000K Lumens	5000K Lumens
Low BF .77	15	16	1750	1750
Normal BF .88	15	18.5	2050	2050
High BF 1.15	15	26.5	2700	2700

Testing Method: Above system power is half the total system power of a 2-tube installation using an Instant Start ballast. Power and lumen output will vary based on ballast and fixture type. Above data is indicative only.

* Suitable for use in totally enclosed fixtures

** Specification data is preliminary and may be subject to change

*** Suitable for damp locations. Not for use where directly exposed to the weather or water

**** Currently undergoing NSF testing. NSF compliance expected in October 2015

Ref.:#DS104-T8-15W-DIR