

Project Name:	Type:
Part Number:	Date:



GREENCREATIVE

REFINE MR16 FAMILY

FEATURES

- Suitable to replace 42W, 50W, and 75W halogen MR16 lamps
- Powered by TRUE CHROMA (CRI≥95, Rf≥93, R9≥50, SDCM≤3)
- Proprietary REFINE lens enables powerful light output without glare
- 10°, 15°, 25°, 35° beam angles
- Meets ANSI halogen MR16 size requirements
- Dimmable with forward and reverse phase controls*
- Suitable for use in damp locations and totally enclosed fixtures
- Fixture operating temperature: -13°F to 95°F (-25°C to 35°C)
- Lamp ambient temperature: -13°F to 113°F (-25°C to 45°C)
- Rated Lifetime (L70): 25,000hrs
- Industry leading 5 year warranty**
- Compatible with TRUE BEAM accessories***



SCAN ME
or Click Here



SPECIFICATIONS - 42W / 50W Equivalent GU5.3

Product	Model	Equiv.	Wattage (W)	CCT	Lumens (lm)	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.*	Power Factor	Base	Fixture Rating	TRUE CHROMA	ES / JA8 / T20
36114	7.5MR16DIM/927SP10/RC	42W	7.5	2700K	530	71	12V	10°	7,000	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36117	7MR16DIM/927SP15/RC	50W	7	2700K	490	70	12V	15°	5,145	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36118	7MR16DIM/927NF25/RC	50W	7	2700K	490	70	12V	25°	2,800	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36119	7MR16DIM/927FL35/RC	50W	7	2700K	490	70	12V	35°	1,425	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36115	7.5MR16DIM/930SP10/RC	42W	7.5	3000K	540	72	12V	10°	7,200	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36120	7MR16DIM/930SP15/RC	50W	7	3000K	500	71	12V	15°	5,250	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36121	7MR16DIM/930NF25/RC	50W	7	3000K	500	71	12V	25°	2,900	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36122	7MR16DIM/930FL35/RC	50W	7	3000K	500	71	12V	35°	1,450	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36116	7.5MR16DIM/940SP10/RC	42W	7.5	4000K	550	73	12V	10°	7,400	95	Yes	0.9	GU5.3	Enclosed	NO	✓ / ✓ / ✓
36123	7MR16DIM/940FL35/RC	50W	7	4000K	510	73	12V	35°	1,480	95	Yes	0.9	GU5.3	Enclosed	NO	✓ / ✓ / ✓

SPECIFICATIONS - 75W Equivalent GU5.3

Product	Model	Equiv.	Wattage (W)	CCT	Lumens (lm)	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.*	Power Factor	Base	Fixture Rating	TRUE CHROMA	ES / JA8 / T20
36124	7.5MR16DIM/927SP15/RC	75W	7.5	2700K	530	71	12V	15°	5,570	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36125	7.5MR16DIM/927NF25/RC	75W	7.5	2700K	530	71	12V	25°	3,000	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36126	7.5MR16DIM/927FL35/RC	75W	7.5	2700K	530	71	12V	35°	1,540	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36127	7.5MR16DIM/930SP15/RC	75W	7.5	3000K	540	72	12V	15°	5,670	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36128	7.5MR16DIM/930NF25/RC	75W	7.5	3000K	540	72	12V	25°	3,100	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36129	7.5MR16DIM/930FL35/RC	75W	7.5	3000K	540	72	12V	35°	1,560	95	Yes	0.9	GU5.3	Enclosed		✓ / ✓ / ✓
36130	7.5MR16DIM/940FL35/RC	75W	7.5	4000K	550	73	12V	35°	1,595	95	Yes	0.9	GU5.3	Enclosed	NO	✓ / ✓ / ✓

Project Name:	Type:
Part Number:	Date:



GREENCREATIVE

REFINE MR16 FAMILY

SPECIFICATIONS - 42W / 50W Equivalent GU5.3																
Product	Model	Equiv.	Wattage (W)	CCT	Lumens (lm)	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.*	Power Factor	Base	Fixture Rating	TRUE CHROMA	ES / JA8 / T20
35767	7.5MR16DIM/927SP10/R	42W	7.5	2700K	530	71	12V	10°	7,000	95	Yes	0.9	GU5.3	Enclosed		√ / √ / √
35550	7MR16DIM/927SP15/R	50W	7	2700K	490	70	12V	15°	5,145	95	Yes	0.9	GU5.3	Enclosed		√ / √ / √
35551	7MR16DIM/927NF25/R	50W	7	2700K	490	70	12V	25°	2,800	95	Yes	0.9	GU5.3	Enclosed		√ / √ / √
35769	7.5MR16DIM/940SP10/R	42W	7.5	4000K	550	73	12V	10°	7,400	95	Yes	0.9	GU5.3	Enclosed	NO	√ / √ / √

SPECIFICATIONS - 75W Equivalent GU5.3																
Product	Model	Equiv.	Wattage (W)	CCT	Lumens (lm)	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.*	Power Factor	Base	Fixture Rating	TRUE CHROMA	ES / JA8 / T20
35539	7.5MR16DIM/930SP15/R	75W	7.5	3000K	540	72	12V	15°	5,670	95	Yes	0.9	GU5.3	Enclosed		√ / √ / √

SPECIFICATIONS - 50W Equivalent GU10																
Product	Model	Equiv.	Wattage (W)	CCT	Lumens (lm)	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.*	Power Factor	Base	Fixture Rating	TRUE CHROMA	ES / JA8 / T20
35558	5GU10DIM/927NF25	50W	5	2700K	380	76	120V	25°	1,900	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35559	5GU10DIM/927FL35	50W	5	2700K	380	76	120V	35°	1,105	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35561	5GU10DIM/930NF25	50W	5	3000K	390	78	120V	25°	1,950	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35562	5GU10DIM/930FL35	50W	5	3000K	390	78	120V	35°	1,135	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35563	5GU10DIM/940FL35	50W	5	4000K	400	80	120V	35°	1,160	95	Yes	0.9	GU10	Enclosed	NO	√ / √ / √

SPECIFICATIONS - 75W Equivalent GU10																
Product	Model	Equiv.	Wattage (W)	CCT	Lumens (lm)	Efficacy (LPW)	Input Voltage	Beam Angle	CBCP (cd)	CRI	Dim.*	Power Factor	Base	Fixture Rating	TRUE CHROMA	ES / JA8 / T20
37008	6.5GU10DIM/927SP10	75W	6.5	2700K	460	71	120V	10°	6,160	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35544	6.5GU10DIM/927NF25	75W	6.5	2700K	460	71	120V	25°	2,300	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35545	6.5GU10DIM/927FL35	75W	6.5	2700K	460	71	120V	35°	1,330	95	Yes	0.9	GU10	Enclosed		√ / √ / √
37009	6.5GU10DIM/930SP10	75W	6.5	3000K	470	72	120V	10°	6,290	95	Yes	0.9	GU10	Enclosed		√ / √ / √
35547	6.5GU10DIM/930NF25	75W	6.5	3000K	470	72	120V	25°	2,350	95	Yes	0.9	GU10	Enclosed		√ / √ / √
37010	6.5GU10DIM/940SP10	75W	6.5	4000K	480	74	120V	10°	6,425	95	Yes	0.9	GU10	Enclosed	NO	√ / √ / √
35549	6.5GU10DIM/940FL35	75W	6.5	4000K	480	74	120V	35°	1,400	95	Yes	0.9	GU10	Enclosed	NO	√ / √ / √


* This lamp might not be compatible with all dimmers and low-voltage transformers. Please visit www.greencreative.com for compatibility information.

** Please visit www.greencreative.com for Limited Warranty terms.

*** To achieve the best performance, we recommend to use our linear/square/wide lenses in combination with our REFINE 10° lamps (36114/36115/36116/37008/37009/37010). Other media can be used with all REFINE MR lamps (36114 to 36130, 35544 to 35563, and 37008 to 37010).

REFINE MR16 FAMILY

DIMENSIONS & WEIGHT

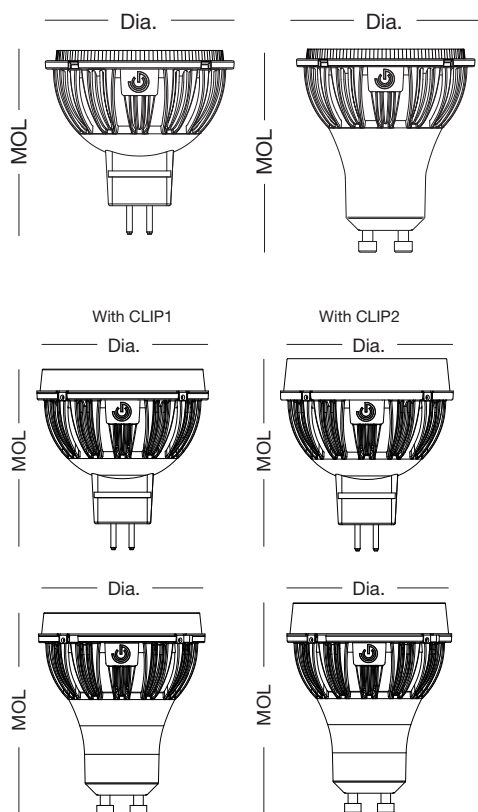

Model	Base	MOL	Dia.	Weight
7.5MR16DIM/xxxxxxx/R	GU5.3	1-7/8"	2"	0.11 lb
7.5MR16DIM/xxxxxxx/RC	GU5.3	1-7/8"	2"	0.11 lb
7MR16DIM/xxxxxxx/R	GU5.3	1-7/8"	2"	0.11 lb
7MR16DIM/xxxxxxx/RC	GU5.3	1-7/8"	2"	0.11 lb
6.5GU10DIM/xxxxxxx	GU10	2-3/16"	2"	0.14 lb
5GU10DIM/xxxxxxx	GU10	2-3/16"	2"	0.11 lb

Model	Base	MOL	Dia.	Weight
7.5MR16DIM/xxxxxxx/RC + One Lens	GU5.3	2-1/16"	2"	0.13lb
7.5MR16DIM/xxxxxxx/RC + Two Lenses	GU5.3	2-3/16"	2"	0.15lb
7MR16DIM/xxxxxxx/RC + One Lens	GU5.3	2-1/16"	2"	0.13lb
7MR16DIM/xxxxxxx/RC + Two Lenses	GU5.3	2-3/16"	2"	0.15lb
6.5GU10DIM/xxxxxxx + One Lens	GU10	2-3/8"	2"	0.16lb
6.5GU10DIM/xxxxxxx + Two Lenses	GU10	2-1/2"	2"	0.18lb
5GU10DIM/xxxxxxx + One Lens	GU10	2-3/8"	2"	0.13lb
5GU10DIM/xxxxxxx + Two Lenses	GU10	2-1/2"	2"	0.15lb

ORDERING INFORMATION


Model	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
7.5MR16DIM/xxxxxxx/R 7.5MR16DIM/xxxxxxx/RC 7MR16DIM/xxxxxxx/R 7MR16DIM/xxxxxxx/RC	12PCS	8-7/8" x 6-11/16" x 2-3/4"	1.75 lb	48PCS	13-7/8" x 9-1/4" x 6-5/8"	7.5 lb
5GU10DIM/xxxxxxx	12PCS	8-7/8" x 6-11/16" x 2-15/16"	1.86 lb	48PCS	13-7/8" x 9-1/4" x 7"	8.13 lb
6.5GU10DIM/xxxxxxx	12PCS	8-7/8" x 6-11/16" x 2-15/16"	2.20 lb	48PCS	13-7/8" x 9-1/4" x 7"	9.26 lb

Where xxx means 824-965 which indicates CRI and color temperature
Where yyyy means beam angle

ILLUMINANCE & CANDELA DISTRIBUTION

42W Equivalence

7.5MR16DIM/930SP10/R, 7.5MR16DIM/930SP10/RC

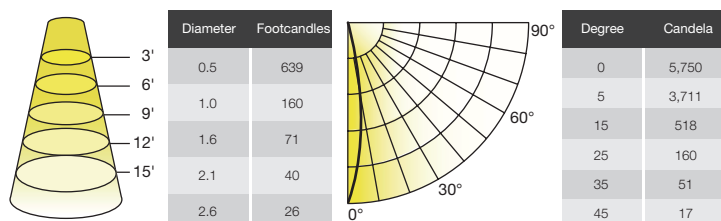




GREENCREATIVE

REFINE MR16 FAMILY


ILLUMINANCE & CANDELA DISTRIBUTION

50W Equivalence


7MR16DIM/930SP15/R, 7MR16DIM/930SP15/RC

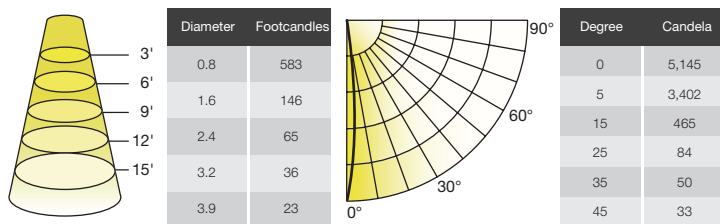


7MR16DIM/930NF25/R, 7MR16DIM/930NF25/RC

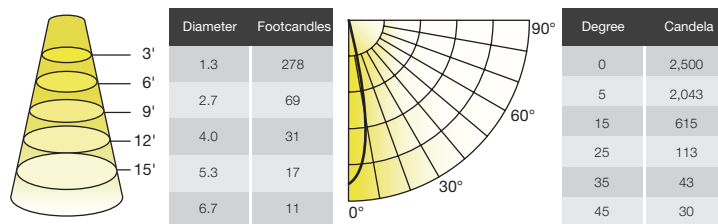


7MR16DIM/930FL35/R, 7MR16DIM/930FL35/RC

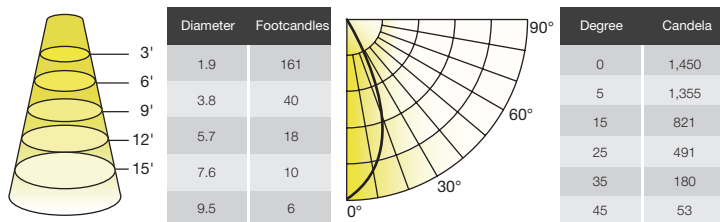

5GU10DIM/930NF25

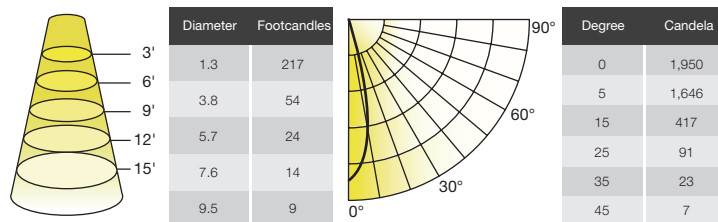


5GU10DIM/930FL35

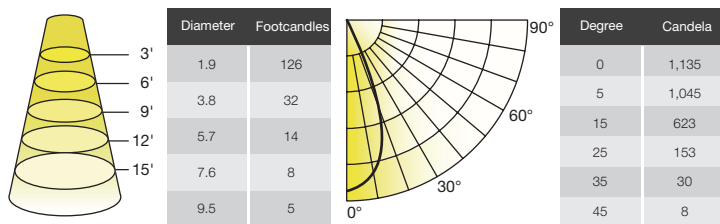


75W Equivalence


7.5MR16DIM/930SP15/R, 7.5MR16DIM/930SP15/RC

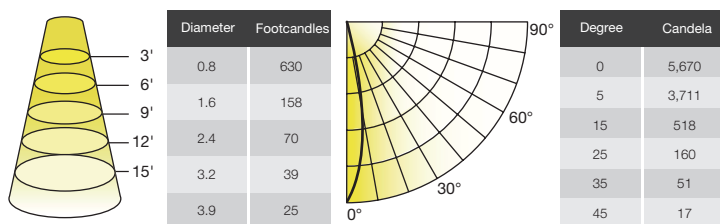

7.5MR16DIM/930NF25/R, 7.5MR16DIM/930NF25/RC

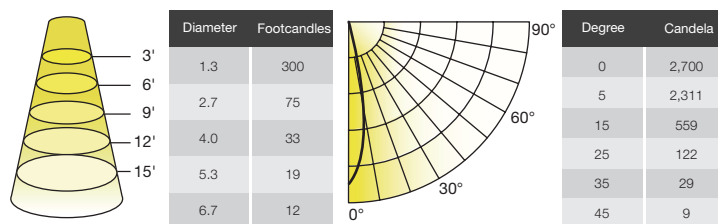

7.5MR16DIM/930FL35/R, 7.5MR16DIM/930FL35/RC

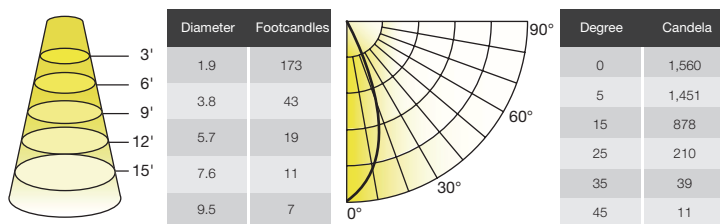


REFINE MR16 FAMILY


ILLUMINANCE & CANDELA DISTRIBUTION

75W Equivalence


6.5GU10DIM/930SP10

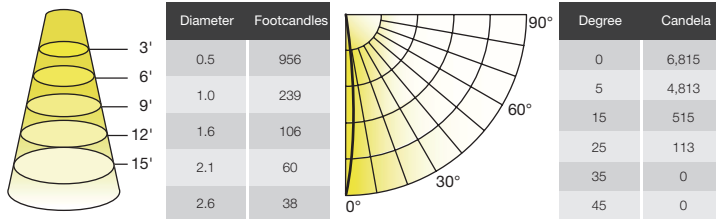

6.5GU10DIM/930NF25

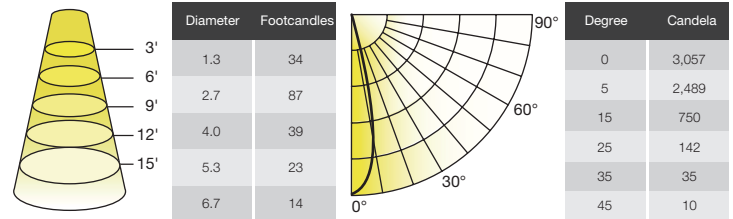

6.5GU10DIM/930FL35

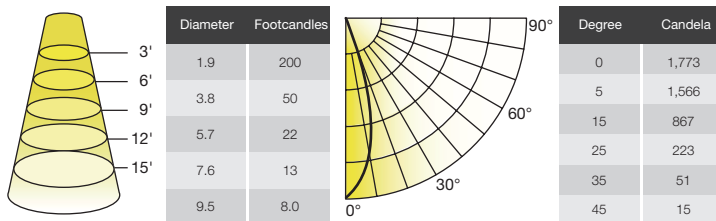


For other CCT use the following multiplier: 2700K .98, 4000K 1.02

SPECIFICATIONS - TRUE BEAM MR ACCESSORIES

HONEYCOMB LOUVER

Reduces glare and softens beam patterns.



Product	Model	Description	Cutoff Angle	CBCP of 10° Lamp
35808	MR/ACC/HC	Honeycomb louver	40°	66%

CCT SHIFT LENS

Adjust the feel of any space by adding CCT lens options.




Product	Model	Description	Lumen Transmissivity	CCT Shift Effect
35809	MR/ACC/CCT22	Shift lens 2200K	80%	2700K to 2200K
35810	MR/ACC/CCT24	Shift lens 2400K	85%	2700K to 2400K

REFINE MR16 FAMILY

SPECIFICATIONS - TRUE BEAM MR ACCESSORIES

COLOR SHIFT LENS

Adjust the feel of any space by adding color lens options.

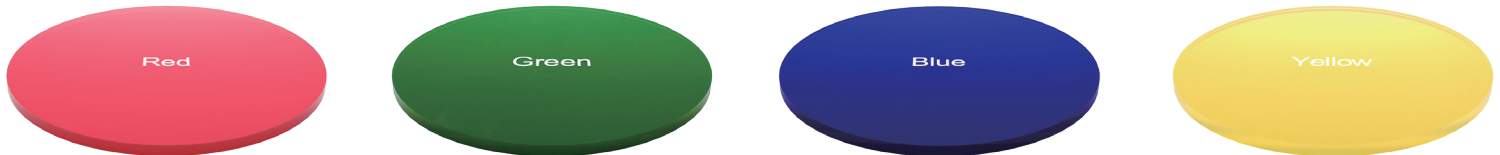

Product	Model	Description	Lumen Transmissivity	Color Shift Effect
35811	MR/ACC/RED	Shift lens Red	39%	Red
35812	MR/ACC/GRE	Shift lens Green	42%	Green
35813	MR/ACC/BLE	Shift lens Blue	26%	Blue
35814	MR/ACC/YLW	Shift lens Yellow	86%	Yellow

LINEAR DISTRIBUTION LENS

Provides an elliptical linear shaped light distribution.



Product	Model	Description	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle Horiz.	Field Angle Vert.
35815	MR/ACC/LN1225	Linear distribution lens 12x25°	80%	35%	12°	25°
35816	MR/ACC/LN1236	Linear distribution lens 12x36°	80%	23%	12°	36°
35817	MR/ACC/LN1260	Linear distribution lens 12x60°	80%	16%	12°	60°


Note: To achieve the best performance, we recommend to use our linear/square/wide lenses in combination with our REFINE 10° lamps (36114/36115/36116).

REFINE MR16 FAMILY

SPECIFICATIONS - TRUE BEAM MR ACCESSORIES

SQUARE DISTRIBUTION LENS

Provides a square shaped light distribution.

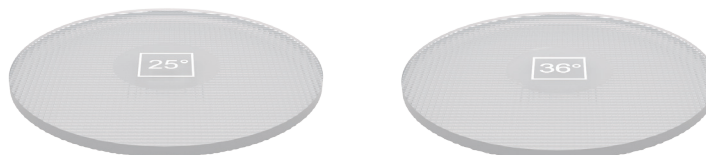

Product	Model	Description	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35818	MR/ACC/SQ2525	Square distribution lens 25°	80%	19%	25°
35819	MR/ACC/SQ3636	Square distribution lens 36°	80%	11%	36°

Note: To achieve the best performance, we recommend to use our linear/square/wide lenses in combination with our REFINE 10° lamps (36114/36115/36116).

WIDE DISTRIBUTION LENS

Maximizes wide distribution illumination for general lighting applications.



Product	Model	Description	Lumen Transmissivity	CBCP of 10° Lamp	Field Angle
35820	MR/ACC/RD6060	Wide distribution lens 60°	78%	6%	60°

Note: To achieve the best performance, we recommend to use our linear/square/wide lenses in combination with our REFINE 10° lamps (36114/36115/36116).

WALL WASH LENS

Bends the beam from 0° to 20° maximum deflection angle while maintaining uniform and consistent color and shape.



Product	Model	Description	Lumen Transmissivity	CBCP of 10° Lamp	Max. Deflection
35821	MR/ACC/WW10D	Wall wash lens 10°	80%	63%	10°
35822	MR/ACC/WW20D	Wall wash lens 20°	80%	60%	20°

REFINE MR16 FAMILY

SPECIFICATIONS - TRUE BEAM MR ACCESSORIES

RETAINING CLIP

CLIP1 is single lens holder

CLIP2 is dual-lenses holder



CLIP1



CLIP2

Product	Model	Description
35806	MR/ACC/CP1	Single accessory retaining clip
35807	MR/ACC/CP2	Dual accessory retaining clip




GREENCREATIVE


REFINE MR16 FAMILY

ILLUMINANCE & CANDELA DISTRIBUTION - LAMP & ACCESSORY


7.5MR16DIM/927SP10/RC

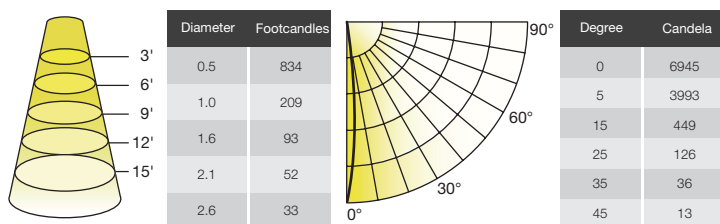


7.5MR16DIM/927SP10/RC + MR/ACC/LN1225

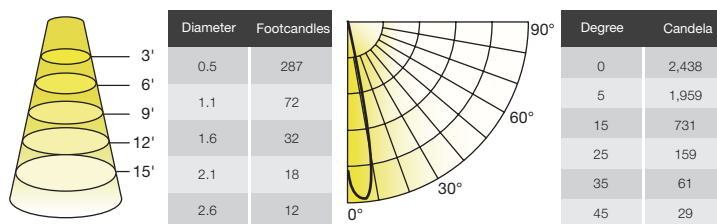


7.5MR16DIM/927SP10/RC + MR/ACC/LN1236

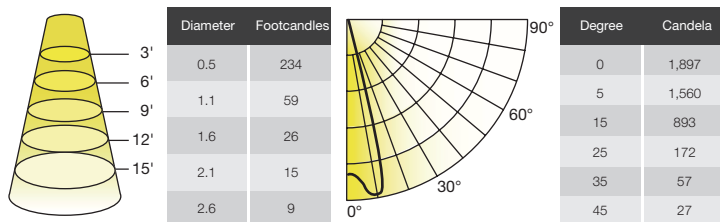


7.5MR16DIM/927SP10/RC + MR/ACC/LN1260

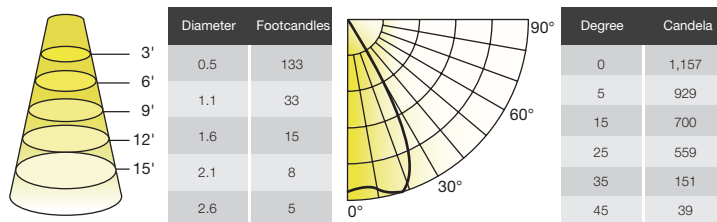


7.5MR16DIM/927SP10/RC + MR/ACC/SQ2525

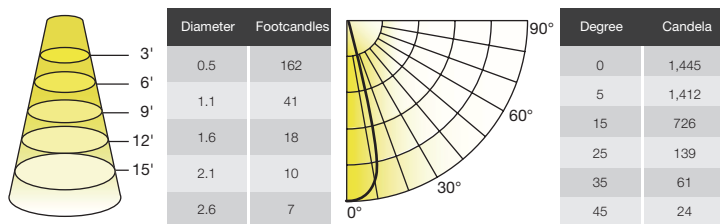


7.5MR16DIM/927SP10/RC + MR/ACC/SQ3636

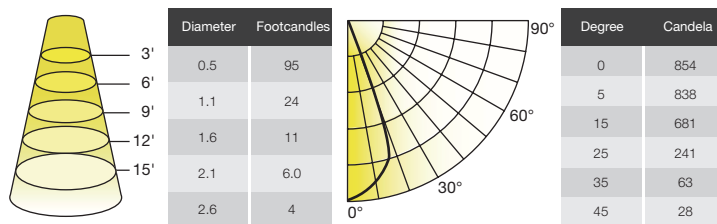


7.5MR16DIM/927SP10/RC + MR/ACC/RD6060

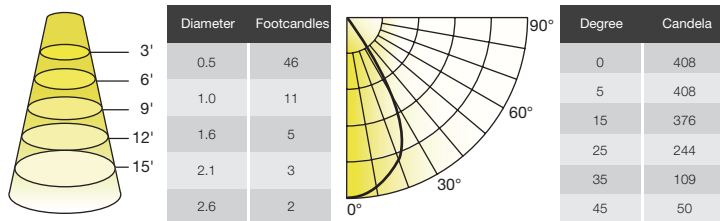

7.5MR16DIM/927SP10/RC + MR/ACC/WW10D

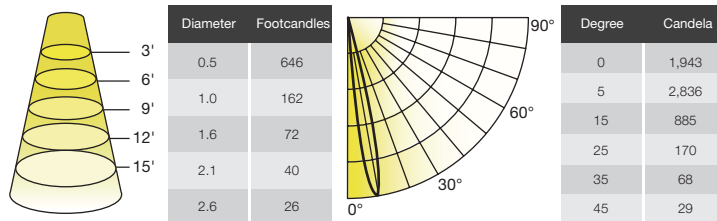

7.5MR16DIM/927SP10/RC + MR/ACC/WW20D

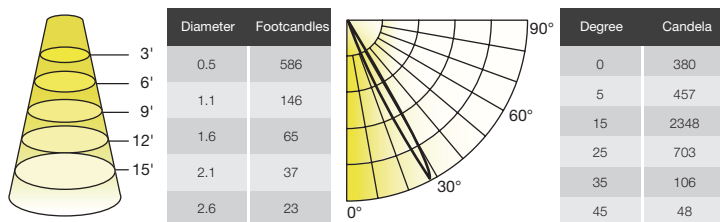









GREENCREATIVE

REFINE MR16 FAMILY

ORDERING INFORMATION - TRUE BEAM MR ACCESSORIES

Product Series	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
MR/ACC/CP1	N.A.	N.A.	N.A.	100PCS	12-1/2" x 6-3/4" x 3-3/8"	1.48lb
MR/ACC/CP2	N.A.	N.A.	N.A.	100PCS	12-1/2" x 9-1/16" x 3-3/8"	1.81lb
MR/ACC/HC	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	0.38lb
MR/ACC/LN1225	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/LN1236	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/LN1260	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/RED	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/GRE	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/BLE	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/YLW	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/CCT22	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/CCT24	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/SQ2525	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/SQ3636	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.30lb
MR/ACC/RD6060	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.37lb
MR/ACC/WW10D	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.26lb
MR/ACC/WW20D	N.A.	N.A.	N.A.	100PCS	8-15/16" x 4-5/8" x 3-3/8"	1.15lb
MR/ACC/CP1	N.A.	N.A.	N.A.	100PCS	12-1/2" x 6-3/4" x 3-3/8"	1.48 lb
MR/ACC/CP2	N.A.	N.A.	N.A.	100PCS	12-1/2" x 6-3/4" x 3-3/8"	1.48 lb

REFINE MR16 FAMILY

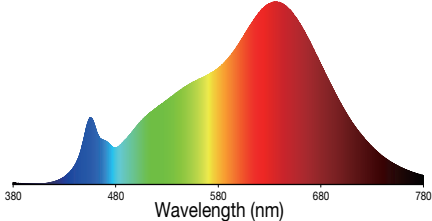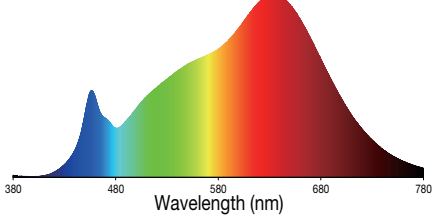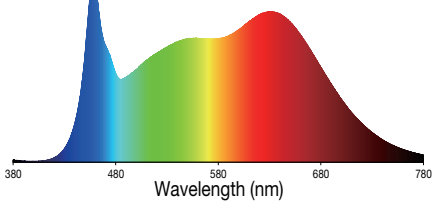COLOR ACCURACY & SPECTRAL POWER DISTRIBUTION		
CCT	COLOR ACCURACY	SPECTRAL POWER DISTRIBUTION
2700K	 Rr: 94, Rg: 100	 Wavelength (nm)
3000K	 Rr: 93, Rg: 100	 Wavelength (nm)
4000K	 Rr: 90, Rg: 97	 Wavelength (nm)

Rf: TM-30 metric measuring color fidelity (whether colors are similar to those under natural light). Rf is a more accurate version of the CRI Ra. Rf is 100 for natural light.
 Rg: TM-30 metric measuring color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.



REFINE MR16 FAMILY

CERTIFICATION INFORMATION

Product	Model	ES ID#
35559	5GU10DIM/927FL35	2372462
35558	5GU10DIM/927NF25	2372461
35562	5GU10DIM/930FL35	2372464
35561	5GU10DIM/930NF25	2372463
35563	5GU10DIM/940FL35	2372465
36126	7.5MR16DIM/927FL35/RC	2387988
36125	7.5MR16DIM/927NF25/RC	2387987
35767	7.5MR16DIM/927SP10/R	2372480
36114	7.5MR16DIM/927SP10/RC	2387982
36124	7.5MR16DIM/927SP15/RC	2387986
36129	7.5MR16DIM/930FL35/RC	2388019
36128	7.5MR16DIM/930NF25/RC	2388018
36115	7.5MR16DIM/930SP10/RC	2387983
36127	7.5MR16DIM/930SP15/RC	2388017
36130	7.5MR16DIM/940FL35/RC	2388020
35769	7.5MR16DIM/940SP10/R	2372482
36116	7.5MR16DIM/940SP10/RC	2387984
36119	7MR16DIM/927FL35/RC	2388023
35551	7MR16DIM/927NF25/R	2372474
36118	7MR16DIM/927NF25/RC	2388022
35550	7MR16DIM/927SP15/R	2372473
36117	7MR16DIM/927SP15/RC	2388021
36129	7MR16DIM/930FL35/RC	2388026
36121	7MR16DIM/930NF25/RC	2388025
35550	7MR16DIM/930SP15/R	2372476
36120	7MR16DIM/930SP15/RC	2388024
36123	7MR16DIM/940FL35/RC	2388027
37008	6.5GU10DIM/927SP10	2400485
35544	6.5GU10DIM/927NF25	2400478
35545	6.5GU10DIM/927FL35	2400480
37009	6.5GU10DIM/930SP10	2400486
35547	6.5GU10DIM/930NF25	2400479
37010	6.5GU10DIM/940SP10	2400487
35549	6.5GU10DIM/940FL35	2400483

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.