




GREENCREATIVE

LUMINAIRES




2016 SUMMER LUMINAIRES BROCHURE

TRACK LINE

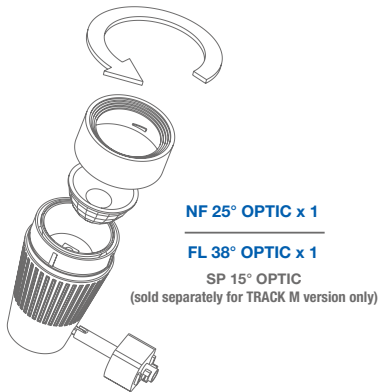
INTERCHANGEABLE LENS
TRACK L & M

EXCEPTIONAL CANDELA


33TRLG4DIM/930

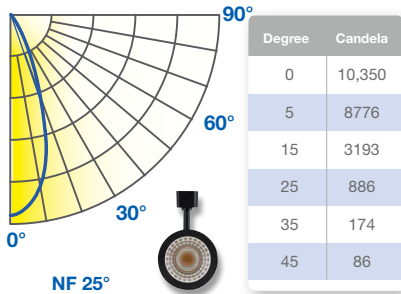


H, J & L VERSIONS



H-Halo Track



J-Juno Track*



L-Lightoller Track (MTO)*

*J & L type versions are compatible with both single and two-circuit track applications

Smooth dimming

NF & FL interchangeable lens (Exc. 8W)

SP 15° optic available for TRM

● Black finish



TRL 33W



TRM 22W



TRS 8W

33TRLG4DIM/927/W/H

97623

2700K

2200

10,000/5150

39W HID



33TRLG4DIM/930/W/H

97629

3000K

2300

10,350/5250

39W HID



33TRLG4DIM/927/W/J

97624

2700K

2200

10,000/5150

39W HID



33TRLG4DIM/930/W/J

97630

3000K

2300

10,350/5250

39W HID



33TRLG4DIM/927/B/H ●

97626

2700K

2200

10,000/5150

39W HID



33TRLG4DIM/930/B/H ●

97632

3000K

2300

10,350/5250

39W HID



33TRLG4DIM/927/B/J ●

97627

2700K

2200

10,000/5150

39W HID



33TRLG4DIM/930/B/J ●

97633

3000K

2300

10,350/5250

39W HID



22TRMG4DIM/927/W/H

97587

2700K

1200

6300/3250/12,200

150W Hal



22TRMG4DIM/930/W/H

97599

3000K

1250

6700/3450/13,000

150W Hal



22TRMG4DIM/927/W/J

97588

2700K

1200

6300/3250/12,200

150W Hal



22TRMG4DIM/930/W/J

97600

3000K

1250

6700/3450/13,000

150W Hal



22TRMG4DIM/927/B/H ●

97590

2700K

1200

6300/3250/12,200

150W Hal



22TRMG4DIM/930/B/H ●

97602

3000K

1250

6700/3450/13,000

150W Hal



22TRMG4DIM/927/B/J ●

97591

2700K

1200

6300/3250/12,200

150W Hal



22TRMG4DIM/930/B/J ●

97603

3000K

1250

6700/3450/13,000

150W Hal



8TRSG4DIM/827NF30/W/H

16340

2700K

600

1905

75W Hal



8TRSG4DIM/830NF30/W/H

16346

3000K

625

1950

75W Hal



8TRSG4DIM/827NF30/W/J

16341

2700K

600

1905

75W Hal



8TRSG4DIM/830NF30/W/J

16347

3000K

625

1950

75W Hal



8TRSG4DIM/827NF30/B/H ●

16343

2700K

600

1905

75W Hal



8TRSG4DIM/830NF30/B/H ●

16349

3000K

625

1950

75W Hal



8TRSG4DIM/827NF30/B/J ●

16344

2700K

600

1905

75W Hal



8TRSG4DIM/830NF30/B/J ●

16350

3000K

625

1950


75W Hal



ARCHITECTURAL DL LINE



FITS EXISTING HOUSING

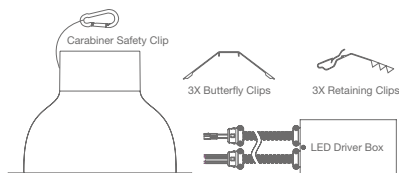

9.5", 8" & 6" versions

Quick connect & pre-wired conduit

0-10V dimming – 120-277V



CDL 9.5" 48W

48CDL9.5G4DIM/830/277V

97706

3000K

3200

2x42W



48CDL9.5G4DIM/835/277V

97707

3500K

3400

2x42W



48CDL9.5G4DIM/840/277V

97708

4000K

3600

2x42W



CDL 8" 32W

32CDL8G4DIM/830/277V

97696

3000K

2150

2x26W



32CDL8G4DIM/835/277V

97697

3500K

2300

2x26W



32CDL8G4DIM/840/277V

97698

4000K

2450

2x26W



CDL 6" 22W

22CDL6G4DIM/830/277V

97686

3000K

1600

2x18W



22CDL6G4DIM/835/277V

97687

3500K

1650

2x18W




22CDL6G4DIM/840/277V

97688

4000K

1700

2x18W

EMERGENCY
LED DRIVER 10W*

To order this option add /EM after the model number

ex. 22CDL6G4DIM/840/277V/EM

NEW!

COMMERCIAL DL LINE

ADJUSTABLE LUMEN OUTPUT
3 DEFINED LIGHT LEVELSCDL 9.5"
23.5/32/45W

45CDLA9.5/827/277V

NEW!

57878

2700K

1860/2325/2975

23.5W



45CDLA9.5/830/277V

57879

3000K

2000/2500/3200

1x42W/2x26W

32W



45CDLA9.5/835/277V

57880

3500K

2000/2500/3200

1x57W/2x32W

45W



45CDLA9.5/840/277V

57881

4000K

2000/2500/3200

2x42W

CDL 8"
12/19/27W

27CDLA8/827/277V

NEW!

57873

2700K

930/1400/1860

12W



27CDLA8/830/277V

57874

3000K

1000/1500/2000

1x26W/2x13W

19W



27CDLA8/835/277V

57875

3500K

1000/1500/2000

1x32W/2x18W

27W



27CDLA8/840/277V

57876

4000K

1000/1500/2000

1x42W/2x26W

CDL 6"
8.5/13.5/21W

21CDLA6/827/277V

NEW!

57868

2700K

650/930/1400

8.5W



21CDLA6/830/277V

57869

3000K

700/1000/1500

1x18W

13.5W



21CDLA6/835/277V

57870

3500K

700/1000/1500

1x26W/2x13W

21W



21CDLA6/840/277V

57871

4000K

700/1000/1500

1x32W/2x18W

CDL 4"
6/9/14W

14CDLA4/827/277V

NEW!

57863

2700K

465/650/930

6W



14CDLA4/830/277V

57864

3000K

500/700/1000

1x13W

9W



14CDLA4/835/277V

57865

3500K

500/700/1000

1x18W

14W



14CDLA4/840/277V

57866

4000K

500/700/1000

1x26W/2x13W

EMERGENCY
INVERTER 35W**

35EMINVERTER

NEW!

58012

N.A.

N.A.

N.A.

N.A.

9.5", 8", 6" & 4" versions


For retrofit, remodel or new construction

Easy-fit installation

TROFFER LINE



0-10V DIMMING

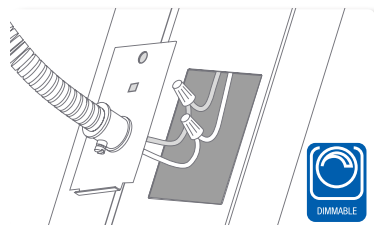

Meets DLC® Premium requirements
120-277V universal voltage
L85 50,000-hour lifetime



**TROFFER
2X4' 40W**

40TROF24DIM/835/277V

97792

3500K

4400

2x4'



40TROF24DIM/840/277V

97793

4000K

4400

2x4'



**TROFFER
2X2' 32W**

32TROF22DIM/835/277V

97788

3500K

3550

2x2'



32TROF22DIM/840/277V

97789

4000K

3550


2x2'



RETROFIT KIT LINE




UNIFORM LIGHT DISTRIBUTION

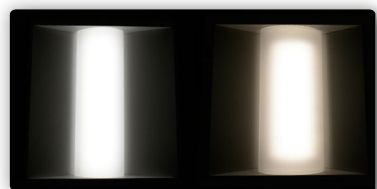

GREEN CREATIVE Retrofit Kit Other Retrofit Kit

EASY INSTALLATION - 3-5 MINUTES

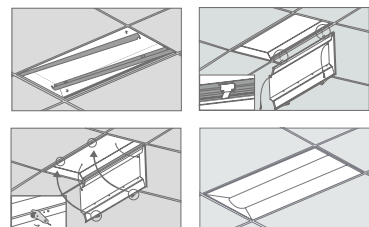

Meets DLC® Premium requirements
0-10V dimming – 120-277V
L85 50,000-hour lifetime



**TROFFER
RETROFIT KIT
2X4' 36W**

36TROFKIT24DIM/830/277V

97799

3000K

4000

2x4'



36TROFKIT24DIM/835/277V

97800

3500K

4000

2x4'



36TROFKIT24DIM/840/277V

97801

4000K

4150

2x4'



**TROFFER
RETROFIT KIT
2X2' 30W**

30TROFKIT22DIM/830/277V

97795

3000K

3330

2x2'



30TROFKIT22DIM/835/277V

97796

3500K

3300

2x2'



30TROFKIT22DIM/840/277V

97797

4000K

3300

2x2'



**STEP DIMMING
MODULE 50/50***


To order this option add /STEPDIM after the model number

ex. 40TROF24DIM/835/277V/STEPDIM

To order this and emergency add both:

ex. 40TROF24DIM/835/277V/STEPDIM/EM

NEW!



**EMERGENCY
LED DRIVER 10W***

To include this option add /EM after the model number

ex. 32TROF22DIM/835/277V/EM

To order this and step dimming add both:

ex. 32TROF22DIM/835/277V/STEPDIM/EM

NEW!

* For TROFFER & TROFFER RETROFIT KIT only



GREEN CREATIVE
1200 Bayhill Drive, Suite 220
San Bruno, CA 94066

Tel / Fax: (866) 774-5433
info@greencreative.com
www.greencreative.com

f / GREENCREATIVELED
t / GCLightingLED
in / GREEN CREATIVE