



ProLume®

ProFormance®

Electronic Fluorescent Ballast Specifications


EP232IS/120/MC

Ballast Type: Electronic Fluorescent
Starting Method: Instant Start
Lamp Connection: Parallel
Input Voltage: 120V
Input Frequency: 50/60Hz


Lamp Type	# of Lamps	Volts	Rated Lamp Watts	Min. Start Temp (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	THD %	Power Factor	B. E. F.	Wire Diag.
F32T8	2	120	32	0/-18	0.52	62	0.88	<10	0.99	1.41	2-17
F32T8	1	120	32	0/-18	0.32	38	1.08	<12	0.98	2.84	1-3
F28T8	2	120	28	0/-18	0.44	53	0.84	<10	0.99	1.59	2-17
F28T8	1	120	28	0/-18	0.28	33	1.01	<10	0.99	3.06	1-3
F25T8/ES	2	120	25	0/-18	0.41	49	0.87	<10	0.99	1.78	2-17
F25T8/ES	1	120	25	0/-18	0.26	32	1.06	<10	0.99	3.31	1-3
F25T8	2	120	25	0/-18	0.40	48	0.88	<10	0.99	1.84	2-17
F25T8	1	120	25	0/-18	0.25	30	1.10	<12	0.98	3.67	1-3
F17T8	2	120	17	0/-18	0.29	34	0.88	<12	0.98	2.59	2-17
F17T8	1	120	17	0/-18	0.19	22	1.18	<12	0.97	5.36	1-3
F15T8	2	120	15	0/-18	0.21	25	0.77	<12	0.98	3.08	2-17
F15T8	1	120	15	0/-18	0.15	18	0.91	<15	0.96	5.06	1-3
F40T8	1	120	40	0/-18	0.37	44	1.00	<10	0.99	2.27	1-3

Also operates equivalent U-shaped lamps

WIRING DIAGRAMS



1-3




2-17

STANDARD LEAD LENGTHS

	in.	cm.
Black	25	63.50
White	25	63.50
Blue	31	78.74
Red	48	121.92

OCV: 600V


CASE DIAGRAM

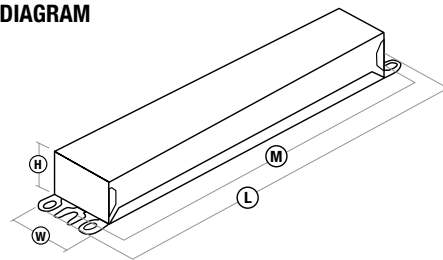

CASE DIMENSIONS

Overall (L)	Width (W)	Height (H)	Mounting (M)
9.57"	1.13"	1.07"	8.90"

HOT SPOT LOCATION



Maximum Case Temperature: 167°F

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PN# 50176