



LED LAMPS

ProLED **Filament LED Series**

The look and feel of period-style
incandescent through state-of-the-art
LED technology



Halco
LIGHTING TECHNOLOGIES

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.


800.677.3334 www.halcolighting.com

ProLED® Filament LED Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____




B10




The B10 and CA10 LED filament lamps maintain a classic look in chandeliers, while using 90% less energy.

Specifications

- Full glass design maintains the look of incandescent
- 2200K and 2700K color temperature options
- Clear and amber glass options
- ENERGY STAR Certified options
- Dimmable to 10%
- E12 and E26 base options
- 25,000 and 15,000 hour life options
- 3-Year Warranty
- UL Listed for damp locations

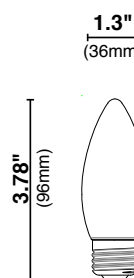

E26 B10

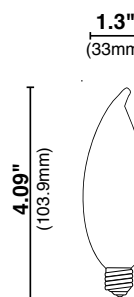

CA10



Ordering Information

3 YR
WARRANTY



	Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	Equivalent Wattage
B10															
⊗	4	E12	81130	B10CL4/ANT/827/LED	Clear Filament	Yes	120	2700K	82	330	25,000	300	24/96	3.72	40
⊗	4	E26	81134	B10CL4ANT/827/E26/LED	Clear Filament	Yes	120	2700K	82	350	15,000	300	24/96	3.78	40
⊗	4	E12	81135	B10AMB4ANT/722/LED	Amber Filament	Yes	120	2200K	75	240	15,000	300	24/96	3.72	40
CA10															
⊗	4	E12	81136	CA10AMB4ANT/722/LED	Amber Filament	Yes	120	2200K	75	350	15,000	300	24/96	4.09	40
⊗	4	E12	81137	CA10CL4ANT/827/LED	Clear Filament	Yes	120	2700K	82	450	15,000	300	24/96	4.13	40
⊗	4	E12	81138	CA10CL4ANT/827/E26/LED	Clear Filament	Yes	120	2700K	82	450	15,000	300	24/96	3.78	40

Ordering information continued on next page.

⊗ NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase.

Not for use in enclosed fixtures.



May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

ProLED® Filament LED Series

Product #: _____ Type: _____

Project: _____ Date: _____

Comments: _____ Initials: _____

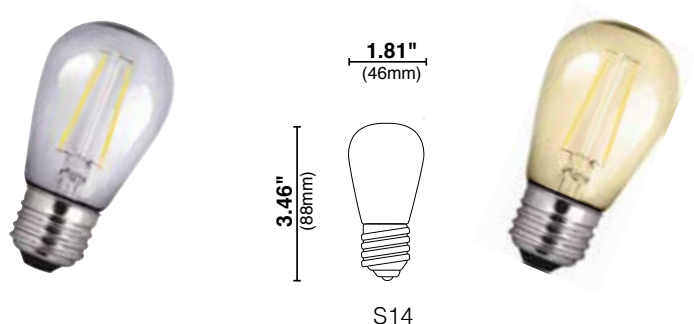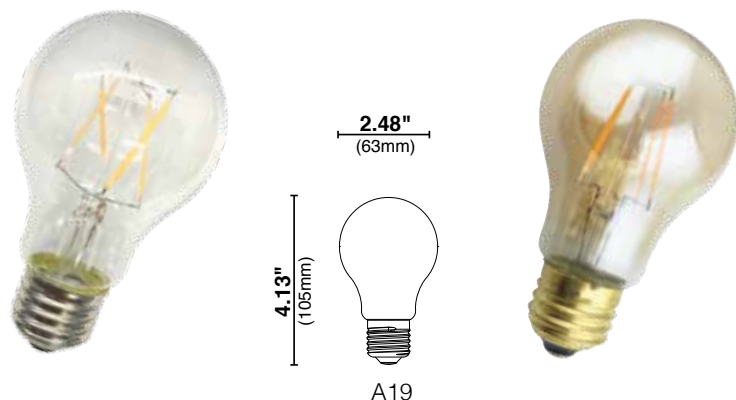

Upgrade standard A19 and S14 lamps with LED filaments for a trendy look and feel for under five watts per lamp.

Specifications

- Designed for indoor and outdoor use
- 2200K and 2700K color temperature options
- Clear and amber glass options
- ENERGY STAR Certified options
- Dimmable to 10%
- E26 base to fit standard luminaire sockets
- 15,000 hour life
- 3-Year Warranty
- Perfect for use in DecoStrand™ from Halco
- S14 lamps are UL Listed for wet locations
- A19 lamps are UL Listed for damp locations
- IP65 rated



Ordering Information

3 YR
WARRANTY



	Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	Equivalent Wattage
A19															
	4.5	E26	81128	A19CL4ANT/827/LED	Clear Filament	Yes	120	2700K	82	450	15,000	300	6/24	4.13	40
	4.5	E26	81129	A19AMB4ANT/722/LED	Amber Filament	Yes	120	2200K	75	380	15,000	300	6/24	4.13	40
S14															
	2	E26	81139	S14CL2ANT/827/LED	Clear Filament	No	120	2700K	82	200	15,000	280	25/100	3.46	25
	2	E26	81140	S14AMB2ANT/822/LED	Amber Filament	No	120	2200K	82	160	15,000	280	25/100	3.46	25
	2	E26	82139	S14CL2ANT/827/LED2	Clear Filament	Yes	120	2700K	82	200	15,000	280	25/100	3.46	25
	2	E26	82140	S14AMB2ANT/822/LED2	Amber Filament	Yes	120	2200K	82	160	15,000	280	25/100	3.46	25

Ordering information continued on next page.

NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase.

Not for use in enclosed fixtures.


May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

ProLED® Filament LED Series

Product #: _____ Type: _____

Project: _____ Date: _____



Comments: _____ Initials: _____



Create a unique and bold statement with G25, ST19, and T10 LED filament lamps with 80% greater energy efficiency.

Specifications

- 2200K and 2700K color temperature options
- Clear and amber glass options
- ENERGY STAR Certified options
- Dimmable to 10%
- E26 base to fit standard luminaire sockets
- 15,000 hour life
- 3-Year Warranty
- Perfect for use in DecoStrand™ from Halco
- UL Listed for damp locations

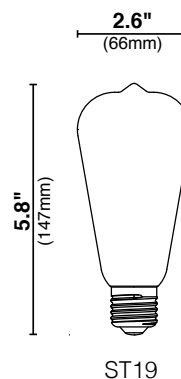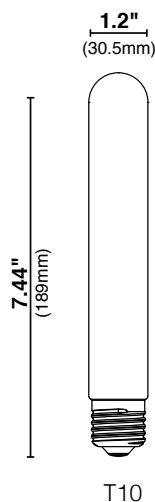

Ordering Information

3 YR
WARRANTY



Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Spread	Pkg. Qty.	MOL	Equivalent Wattage
G25														
4.5	E26	81131	G25CL4ANT/827/LED	Clear Filament	Yes	120	2700K	82	450	15,000	300	6/24	4.6	40
ST19														
5	E26	81132	ST19AMB5ANT/722/LED	Clear Filament	Yes	120	2200K	75	300	15,000	300	6/24	5.79	40
T10														
5	E26	81133	T10AMB5ANT/722/LED	Amber Filament	Yes	120	2200K	75	450	15,000	300	24/48	7.44	40

o NEW ITEM

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Represents lamps that are ENERGY STAR® certified.

Warranty Commercial/Industrial: This product is warranted for 3 years from the date purchase.

Not for use in enclosed fixtures.

May not be compatible with all dimmable systems, dimming performance may vary by system, please check the website www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.