

2x4 Volumetric Panel Light Series



ProLED® 2x4 Volumetric Panel Lights are energy efficient alternatives – only 42W delivering up to 4450 lumens – to Linear Fluorescent architectural recessed fixtures. The superior LED technology delivers consistent color and CRI for a uniform installation and improves lumen maintenance for long useful rated life. ProLED 2x4 Volumetric Panel Light offers 0-10V dimming standard with low voltage leads supplied in the integrated driver. Applications include offices, conference rooms, hallways, schools, healthcare, hospitality and retail. ProLED Volumetric Panel Light Series is backed by a 10-Year Warranty.

Performance Specifications

CRI _____	82	Min. Start Temp. _____	0°C (-32°F)
Rated Life* _____	75,000 hour life	Max. Operating Temp. _____	40°C (104°F)
Watt _____	42W	Power Factor _____	>0.9%
Lumens _____	4200 (3500K), 4400 (4000K), 4450 (5000K)	THD _____	<20%
Lumens per Watt (LPW) _____	100 (3500K), 105 (4000K), 105 (5000K)	Warranty _____	10-year
Input Line Voltage _____	100-277V	Control _____	0-10V Dimmable
Input Line Frequency _____	60 Hz	Weight _____	16.5, 18.75 lbs.

Energy Savings

System	Ballast Factor	System Wattage	Replacement LED	Wattage	Energy Savings
4 Lamp F32T8	0.88	112	24VPL42/8XX/LED	42	62%

Construction

- Frosted milk white diffuser for smooth, even light distribution
- Powder coated, stamped steel volumetric housing
- Lightweight 16.5 and 18.75 lbs. construction
- Integrated driver enclosure with multiple 3/4" knockouts for easy access

Installation

- Fast access terminal block for easy thru-wiring
- Designed for recessed installation in suspended T-grid ceilings
- Lay in or suspended mounting
- Built-in seismic earthquake clips for additional support

Electrical

- ETL listed for wet locations
- 100V-277V input range
- 60 Hz input frequency
- 0-10V dimming standard**
- Power Factor >90%
- 0.48A@120V / 0.21A@277V
- Emergency battery back up options

** It is recommended that no more than 20 fixtures be installed per dimming circuit, and that the fixtures are located no more than 60 feet apart. This load quantity may vary based on the dimming system used.

Ordering Information




Watt	Product #	Product Code	Volts	Color Temp.	CRI	Lumen Output	Useful Life*	Beam Spread	Dimmable	DLC Qualified	Equivalent Wattage
42	81895	24VPL42/835/LED	120~277V	3500K	82	4200	75,000	120°	0-10V	Yes	(4) 32W
42	81892	24VPL42/840/LED	120~277V	4000K	82	4400	75,000	120°	0-10V	Yes	(4) 32W
42	81893	24VPL42/850/LED	120~277V	5000K	82	4450	75,000	120°	0-10V	Yes	(4) 32W
42	81948	24VPL42/835/EM/LED	120~277V	3500K	82	4200	75,000	120°	0-10V	Yes	(4) 32W
42	81949	24VPL42/840/EM/LED	120~277V	4000K	82	4400	75,000	120°	0-10V	Yes	(4) 32W
42	81950	24VPL42/850/EM/LED	120~277V	5000K	82	4450	75,000	120°	0-10V	Yes	(4) 32W

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to operate past this point at decreased light levels.


** May not be compatible with all dimming systems, dimming performance may vary by system.

*** Check the latest update at www.DesignLights.org for listed product catalog numbers. Not all versions are listed.

Dimensions

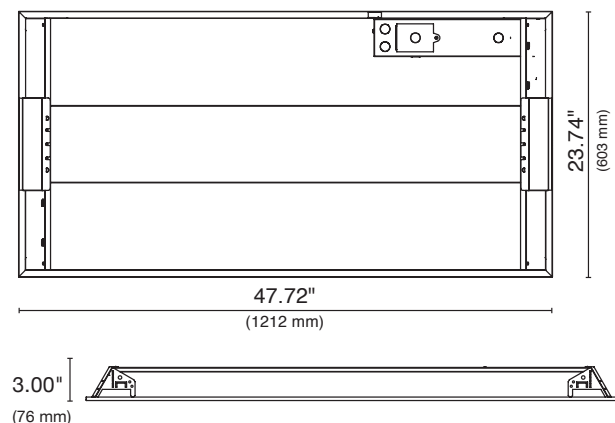


Wiring Diagram

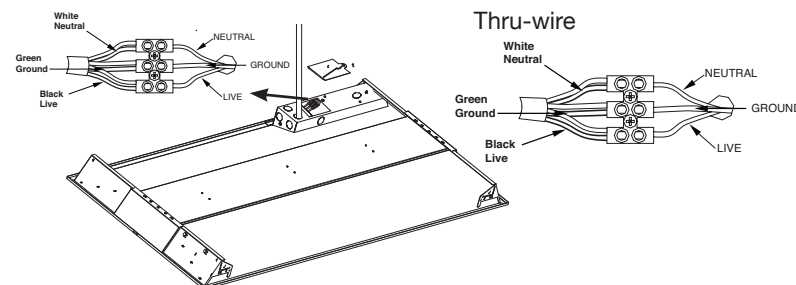

Emergency Backup Lighting
Art Needed

Photometrics

81895, 24TFR42/835/LED



LUMENS PER ZONE


ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	137.9	3.1%	90-100	7.1	0.2%
10-20	394.3	8.8%	100-110	2.4	0.1%
20-30	595.7	13.3%	110-120	2.0	0%
30-40	716.9	16.0%	120-130	1.8	0%
40-50	750.8	16.8%	130-140	1.6	0%
50-60	710.4	15.9%	140-150	2.0	0%
60-70	604.0	13.5%	150-160	2.0	0%
70-80	408.4	9.1%	160-170	1.4	0%
80-90	135.7	3.0%	170-180	0.5	0%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	1,127.9	25.2%	25.2%
0-40	1,844.8	41.2%	41.2%
0-60	3,306.0	73.8%	73.9%
60-90	1,148.0	25.6%	25.7%
70-100	551.2	12.3%	12.3%
90-120	11.5	0.3%	0.3%
0-90	4,454.1	99.4%	99.5%
90-180	20.9	0.5%	0.5%
0-180	4,475.0	99.9%	100%

Total Luminaire Efficiency = 100.00%

81892, 24TFR42/840/LED



LUMENS PER ZONE


ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	135.6	3.1%	90-100	5.9	0.1%
10-20	387.8	8.8%	100-110	2.4	0.1%
20-30	586.5	13.3%	110-120	1.9	0%
30-40	707.0	16.1%	120-130	1.7	0%
40-50	742.2	16.9%	130-140	1.6	0%
50-60	703.4	16.0%	140-150	2.0	0%
60-70	596.1	13.5%	150-160	2.0	0%
70-80	398.7	9.1%	160-170	1.4	0%
80-90	128.0	2.9%	170-180	0.5	0%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	1,109.9	25.2%	25.2%
0-40	1,816.9	41.2%	41.2%
0-60	3,262.5	74%	74.1%
60-90	1,122.7	25.5%	25.5%
70-100	532.5	12.1%	12.1%
90-120	10.2	0.2%	0.2%
0-90	4,385.2	99.5%	99.6%
90-180	19.5	0.4%	0.4%
0-180	4,404.6	99.9%	100%

Total Luminaire Efficiency = 100.00%

81893, 24TFR42/850/LED



LUMENS PER ZONE

ZONE	LUMENS	% TOTAL	ZONE	LUMENS	% TOTAL
0-10	140.1	3.1%	90-100	5.0	0.1%
10-20	400.5	8.9%	100-110	2.2	0%
20-30	605.3	13.5%	110-120	1.8	0%
30-40	728.4	16.2%	120-130	1.6	0%
40-50	761.9	16.9%	130-140	1.4	0%
50-60	716.7	15.9%	140-150	1.3	0%
60-70	602.9	13.4%	150-160	1.6	0%
70-80	399.0	8.9%	160-170	1.5	0%
80-90	123.5	2.7%	170-180	0.6	0%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	1,145.9	25.5%	25.5%
0-40	1,874.3	41.7%	41.7%
0-60	3,352.9	74.5%	74.6%
60-90	1,125.4	25%	25%
70-100	527.5	11.7%	11.7%
90-120	9.0	0.2%	0.2%
0-90	4,478.3	99.5%	99.6%
90-180	17.0	0.4%	0.4%
0-180	4,495.3	99.9%	100%

Total Luminaire Efficiency = 100.00%

Surface Mount Kits for 2x4 Volumetric Panel Light Series


Surface Mount Kit

- Fully powdercoated white surface mount kit allows ProLED Flat Panel and Volumetric Panels to be installed on the surface of drywall or concrete ceilings
- High quality 22 gauge steel
- 3/4" knockout
- Fits multiple standard ceiling box screw patterns
- Easy to install - simply remove access door and slide luminaire onto support rails inside surface mount kit
- Mounting hardware included




Dimensions

SMK22

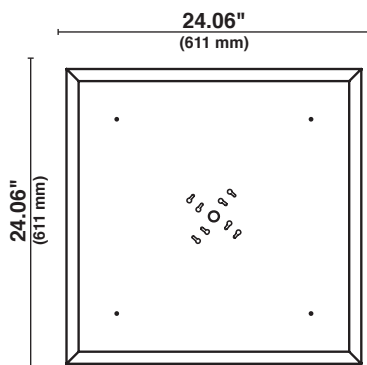

SMK24

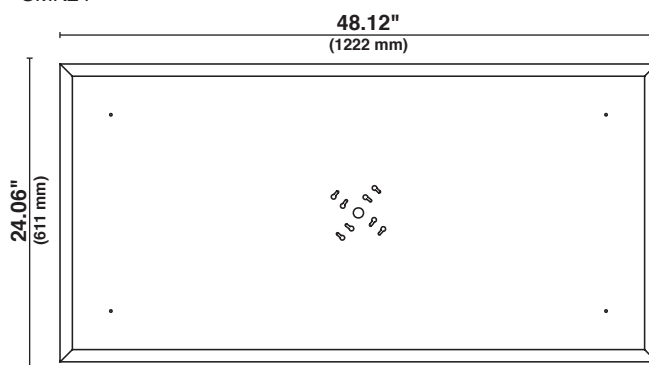

Ordering Information

Product #	Product Code	Description	Color	Dimensions (L" x W" x H")
81105	SMK22	2' x 2' Surface Mount Kit for Flat and Volumetric LED panels	White	24.06" x 24.06" x 4.5"
81106	SMK24	2' x 4' Surface Mount Kit for Flat and Volumetric LED panels	White	48.12" x 24.06" x 4.5"