



LED LUMINAIRES

High Lumen Flood Series



The Halco Flood Series is one of the most affordable and versatile outdoor flood and site lighting solutions on the market today



Yoke 75W, 90W, 150W, 190W



Slipfitter 75W, 90W, 150W, 190W

**Replace 100W to 600W
Metal Halide Floods**

**Available in 75W, 90W,
150W, and 190W**

**NEMA Type 6Hx6V and
6Hx7V Beam Spreads**

Applications:

Schools
Parks
Building Facades
Statues and Monuments
Security Lighting
General Area and Site Lighting

Markets:

Commercial
Industrial



Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com



High Lumen Flood Series

Product #: _____ Type: _____
 Project: _____ Date: _____
 Comments: _____ Initials: _____

Specifications

- Replace 100W to 600W Metal Halide Floods
- Available in 75W, 90W, 150W, and 190W
- NEMA Type 6x6 and 6x7 Beam Spreads
- Ultra Efficient up to 127 lumens per Watt
- Arch Yoke, and Slipfitter Knuckle Mount Options
- 70,000 to 120,000-Hour LED lifespan

Dimensions

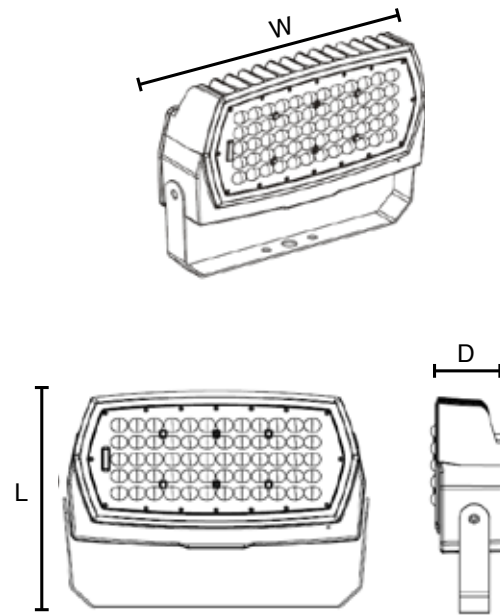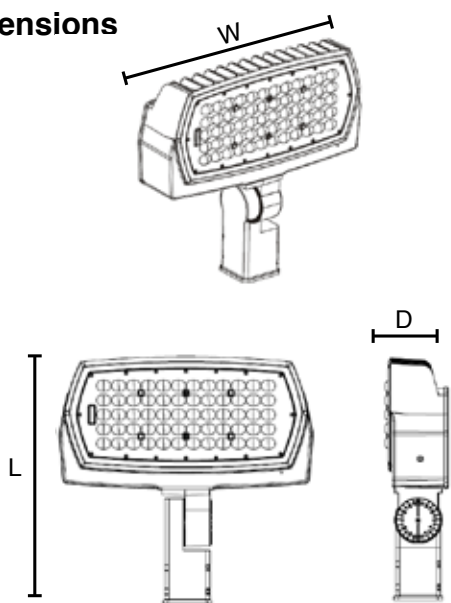

Slipfitter Knuckle

| Watt | Dimensions |
|-------------|-----------------------------|
| 75W & 90W | D-2.9" x W-12.04" x L-12.6" |
| 150W & 190W | D-4" x W-16" x L-15.04" |

Yoke

| Watt | Dimensions |
|-------------|----------------------------|
| 75W & 90W | D-2.9" x W-12.04" x L-8.7" |
| 150W & 190W | D-4" x W-16" x L-11.5" |

Ordering Information



Slipfitter Knuckle

| Watt | Product # | Product Code | Volts | Color Temp. |
|------|-----------|-------------------|----------|-------------|
| 75 | 99671 | FL3/CL75BZ50U/SF | 120-277V | 5000K |
| 90 | 99673 | FL3/CL90BZ50U/SF | 120-277V | 5000K |
| 150 | 99675 | FL4/CL150BZ50U/SF | 120-277V | 5000K |
| 200 | 99677 | FL4/CL200BZ50U/SF | 120-277V | 5000K |
| 75 | 99679 | FL3/CL75BZ40U/SF | 120-277V | 4000K |
| 90 | 99681 | FL3/CL90BZ40U/SF | 120-277V | 4000K |
| 150 | 99683 | FL4/CL150BZ40U/SF | 120-277V | 4000K |
| 190 | 99685 | FL4/CL200BZ40U/SF | 120-277V | 4000K |

Yoke

| Watt | Product # | Product Code | Volts | Color Temp. |
|------|-----------|-------------------|----------|-------------|
| 75 | 99670 | FL3/CL75BZ50U/YK | 120-277V | 5000K |
| 90 | 99672 | FL3/CL90BZ50U/YK | 120-277V | 5000K |
| 150 | 99674 | FL4/CL150BZ50U/YK | 120-277V | 5000K |
| 200 | 99676 | FL4/CL200BZ50U/YK | 120-277V | 5000K |
| 75 | 99678 | FL3/CL75BZ40U/YK | 120-277V | 4000K |
| 90 | 99680 | FL3/CL90BZ40U/YK | 120-277V | 4000K |
| 150 | 99682 | FL4/CL150BZ40U/YK | 120-277V | 4000K |
| 190 | 99684 | FL4/CL200BZ40U/YK | 120-277V | 4000K |

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase.

** Check the latest update at www.DesignLights.org for listed product catalog numbers. All versions may not be listed.

***IP64 - Rated as 'Dust Tight' and 'Splash' protected.