

LED Dusk to Dawn Series





50,000 Hour Life

A high performance, low maintenance LED luminaire designed for harsh outdoor environments



Durable Die-Cast Aluminum Housing and Polycarbonate Lens

Automatically Switches On/Off

21" Aluminum Arm with Mounting Hardware

Backed by a 5-Year Warranty

Applications:

Security Lighting Yards Parking Lots Roadways

Markets:

Commercial Residential Industrial




LED Dusk to Dawn Series

Product #:	Type:
Project:	Date:
Comments:	Initials:

Specifications

- Operating temperature range; -40°F (-40°C) to 113°F (45°C)
- Die-cast aluminum housing
- Gray powder coat finish
- High impact polycarbonate lens
- NEMA approved universal voltage photocell to automatically switch on/off
- 21" Aluminum arm for wall/pole mounting included
- Universal voltage driver, 120-277V
- UL listed for wet locations
- IP65 rated for outdoor use

Dimensions

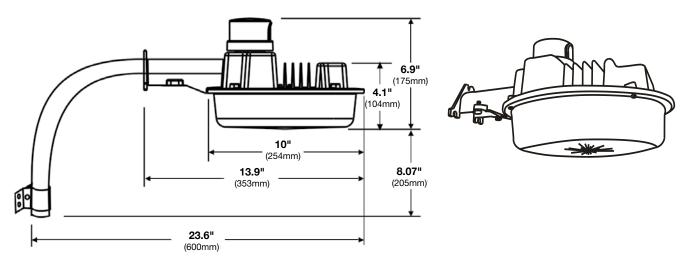

Weight

6.2 lbs. (2.8kg)

Ordering Information



		Watt	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Fixture Size L x W x H	DLC® Qualified	Equivalent Wattage
•	o 4	1 1	99915	DD1/CL41GY50/LED	120-277	5000K	75	3194	50,000	13.9" x 10" x 6.9"	No	100W HID
•	o 5	58	99916	DD2/CL58GY50/LED	120-277	5000K	75	5542	50,000	13.9" x 10" x 6.9"		150W HID, 175W Mercury Vapor

ONEW ITEM

^{*} Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels. Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase, based on 10 hours of use per day.

IP65 rated – this lamp is rated for use outdoors where exposed directly to water from rain or irrigation. The lamp is not submersible, not for this type of enclosed fixture.