

LED LAMPS

ProLED® **Decorative Chandelier Series**



Dimmable




Decorative



25,000 Hour Life

Natural, appealing look for decorative lighting applications



Heat-to-Base

The advanced Heat-to-Base structure allows quick heat transfer. It helps to lower the junction temperature of LEDs and at the same time maintain the glass shape design.

Torpedo and Flame Tip Options

Long Life of 25,000 Hours

5-Year Limited Warranty

Applications:

Accent
Hospitality

Markets:

Residential
Commercial

Halco®
LIGHTING TECHNOLOGIES

where there's light, there's halco®

Contact Your Customer Care Specialist
For Pricing, Orders And Technical Support.

800.677.3334 www.halcolighting.com

ProLED® Decorative Chandelier Series

Product #: _____ Type: _____



Project: _____ Date: _____

Comments: _____ Initials: _____

Specifications

- IP65 rating means that ProLED® Decorative Chandelier lamps are ideal for indoor or outdoor environments
- Dimmable
- Unique "Heat-to-Base" structure allows for heat to be dissipated through the base of the lamp itself, minimizing the need for a visible heat sink
- UL Listed for damp location

Energy Savings Comparison

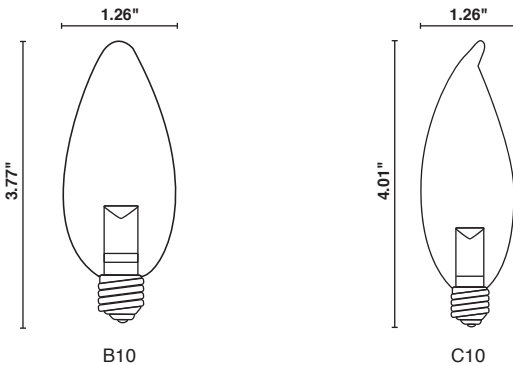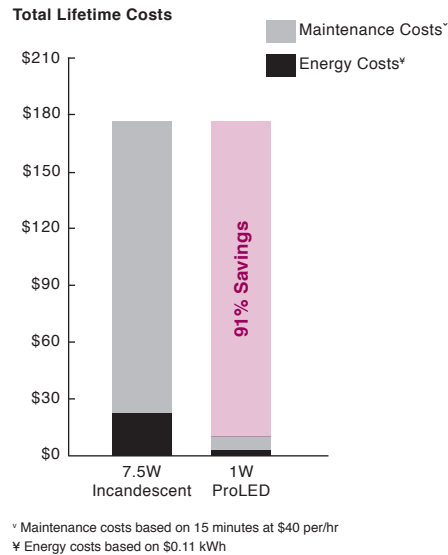

Ordering Information



	Watt	Base	Product #	Product Code	Description	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL
B10												
	1	Cand.	80172	B10CL1/827/LED	Clear Dimmable, IP65 Rated	120	2700	82	25	25,000	1/25	3.77"
	1	Cand.	80173	B10CL1/724/LED	Clear Dimmable, IP65 Rated	120	2400	72	20	25,000	1/25	3.77"
CA10												
	1	Cand.	80174	CA10CL1/827/LED	Clear Dimmable, IP65 Rated	120	2700	82	25	25,000	1/25	4.01"
	1	Cand.	80175	CA10CL1/724/LED	Clear Dimmable, IP65 Rated	120	2400	72	20	25,000	1/25	4.01"

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase, based on 10 hours of use per day.

Not for use in enclosed fixtures. Suitable for use in sealed metal landscape fixtures; protected from elements.