


Metal Halide Ballast Specifications


BALLAST SPECIFICATIONS				
Input Volts	120V	208V	240V	277V
Frequency	60 Hz			
Circuit Type	CWA			
Input Power	458W			
Starting Current	3.50A	2.02A	1.75A	1.52A
Operating Current	3.90A	2.30A	2.00A	1.70A
Open Circuit Current	2.70A	1.64A	1.36A	1.22A
Recommended Fuse	10.0A	7.0A	5.0A	5.0A
Open Circuit Volts	270-330V			
Short Circuit Current (Input)	2.55-3.85A	1.50-2.30A	1.25-1.95A	1.10-1.70A
Short Circuit Current (Secondary)	3.30-4.30A			
Insulation System	Class H, 180°C			
UL 1029 Bench Top Rise Code	B	C	B	B
Min. Starting Temp	-22°F / -30°C			

CAPACITOR




Diameter: 1.78"
 Height: 3.27"
 Cap.: 24mfd +/- 3%
 Minimum Volts: 400V
 Case Max. Temp.: 90°C

WIRING DIAGRAM

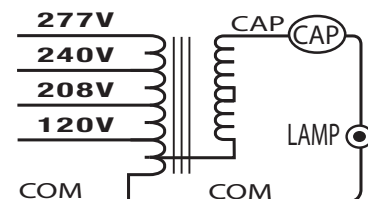


BALLAST DIMENSIONS

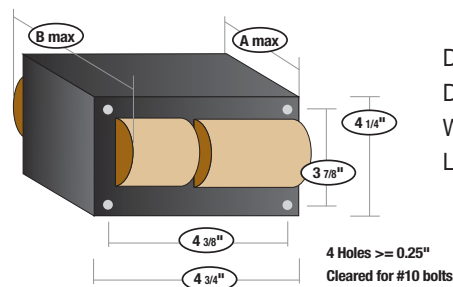

Dim. (A): 2.00"
 Dim. (B): 4.00"
 Weight: 11.50 lbs
 Lead Length: 12"

REPLACEMENT KIT MOUNTING BRACKETS

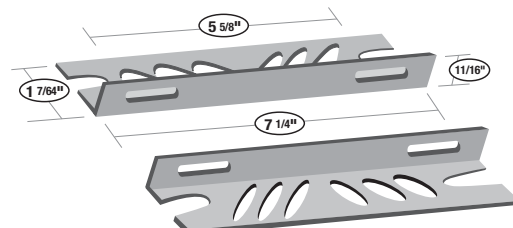

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.