

GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	40 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

CASE STYLE W: POLYCARBONATE



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current 120/277V	Power Factor	Efficiency	Hatch Part Number
Dimming Models									
40W	**350mA	38 - 114 VDC	0-10V Dimming	120 - 277 VAC	46W	0.41/0.19A	>0.90	88%	**LC40-0350Z-UNV-W
	**450mA	30 - 89 VDC	0-10V Dimming	120 - 277 VAC	46W	0.41/0.19A	>0.90	88%	**LC40-0450Z-UNV-W
	*700mA	18 - 54 VDC	0-10V Dimming	120 - 277 VAC	46W	0.41/0.19A	>0.90	87%	*LC40-0700Z-UNV-W
	1050mA	12 - 36 VDC	0-10V Dimming	120 - 277 VAC	46W	0.41/0.19A	>0.90	87%	LC40-1050Z-UNV-W
	1280mA	10 - 29 VDC	0-10V Dimming	120 - 277 VAC	46W	0.41/0.19A	>0.90	87%	LC40-1280Z-UNV-W
	1400mA	10 - 28 VDC	0-10V Dimming	120 - 277 VAC	46W	0.41/0.19A	>0.90	87%	LC40-1400Z-UNV-W

** Non-Class 2

*Class 2 US ONLY

PRODUCT FEATURES

- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Minimum start temp: -40°C
- Surge voltage rating: L-N 4kV

WARRANTY


- 5 year limited warranty

APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) consumer limits
- IP66



MECHANICAL SPECIFICATIONS: CASE STYLE W

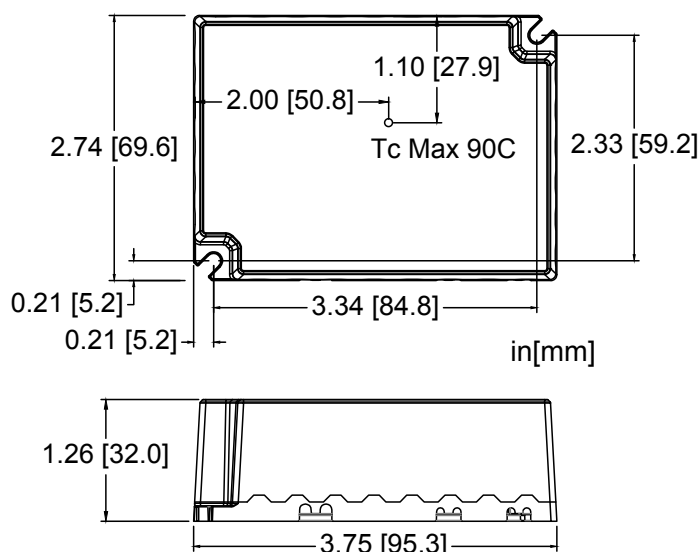

WIRING INFORMATION

Input:	12", Black (L), White (N) #18AWG
Output:	12", Red (+), Blue (-) #18AWG
Dimming:	12", Purple (+), Grey (-) # 18AWG

PACKAGING INFORMATION

Weight:	12.25oz
Quantity:	40pc/carton