



ESSENTIAL SERIES
GENERAL PURPOSE LED BULBS



KT-LED15PAR38-F-8CSF

120W REPLACEMENT LAMP

DESCRIPTION

15W PAR38 Lamp | Color Select | > 80 CRI | Standard Flood Distribution



RoHS
Compliant



Enclosed
Fixture Rated

3YEAR
WARRANTY



LAMP TYPE: PAR38
BASE TYPE: E26 (Medium)
WATTAGE: 15W
COLOR TEMPERATURE: 2700/3000/3500/4000/5000K
COLOR RENDERING INDEX (CRI): > 80
WARRANTY: 3 Years
RATED LIFE: L70 (15,000 Hours)

TYPICAL APPLICATIONS

- Track Lighting
- Display
- Flood and Spot Lighting
- Outdoor fixtures (with suitable protection from the elements)

PRODUCT FEATURES

- Energy efficient: 80%+ savings and less heat generation vs legacy equivalents
- Long life that minimizes replacement and maintenance costs
- Durable plastic housing for lower risk of breakage
- Smooth diffused lens for comfortable, glare free performance
- ANSI compliant construction that ensure fitment in intended applications
- Suitable for wet locations
- Suitable for totally enclosed luminaires
- UL Listed, Energy Star Certified
- Forward phase dimmable to 10%
- Operating temperature range -4°F/-20°C to 113°F/45°C
- Power factor: > 0.75
- Complies with Part 15 of FCC


ELECTRICAL AND PERFORMANCE SPECIFICATIONS

Keystone Catalog Number	Wattage	CCT	Lumens	Efficacy	CRI	Input Voltage	Beam Angle	Legacy Equivalent Wattage	Dimmable	Size/Shape
KT-LED15PAR38-F-8CSF	15W	2700K	1080	72 lm/W	>80	120V	40°	120W halogen	Yes	PAR38
		3000K	1080	72 lm/W						
		3500K	1080	72 lm/W						
		4000K	1080	72 lm/W						
		5000K	1080	72 lm/W						

KT-LED15PAR38-F-8CSF

120W REPLACEMENT LAMP

PHYSICAL SPECIFICATIONS

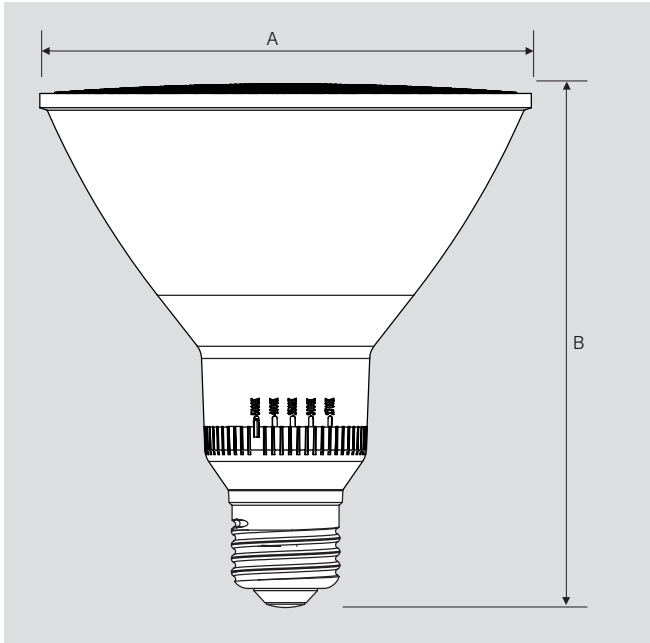

LAMP DIMENSIONS

A (Diameter)	4.65"
B (Length)	5.12"

BASE TYPE: E26 (Medium)

PACKAGING

Carton Quantity	24 pcs
Carton Dimensions	20.16" × 15.24" × 12.44"
Carton Weight	10.42 lbs

ORDERING INFORMATION

ORDER CODE	CARTON QUANTITY	EASY CODE	UPC
KT-LED15PAR38-F-8CSF	24 pcs	VTG-69	843654104171

CATALOG NUMBER BREAKDOWN

KT-LED15PAR38-F-8CSF

1 2 3 4 5 6 7 8

1 Keystone Technologies

2 LED Lamp

3 Wattage

4 Lamp Shape

5 Flood

6 80 CRI

7 Color Select

8 Color Select Designation

8 Color Select Designation

F 2700/3000/3500/4000/5000K