



KT-WLED33-4-8XX-VDIM /G2

LED WRAP FIXTURE

DESCRIPTION

LED wrap fixture

APPLICATION

Used for commercial, retail, and residential wrap applications



5YEAR
WARRANTY



PRODUCT FEATURES


- High quality, high performance design while maintaining traditional fluorescent aesthetic
- Powered by Keystone 0-10V dimmable LED driver
- Can be used with existing mounting infrastructure with minimal changes to the environment
- Luminaire is suitable for installation within a clothes closet storage space
- Over 50% energy savings compared to traditional fluorescent fixtures
- Operating temperature: -20°C/-4°F to 50°C/122°F

**Note: Fixture is not compatible with emergency backups. Not suitable for end-to-end through wiring.*

PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	Input Voltage	Wattage	CRI	Lumen Output	Efficacy
KT-WLED33-4-835-VDIM /G2	3500K	4'	120-277V	33W	80	4,220	128 lm/W
KT-WLED33-4-840-VDIM /G2	4000K	4'	120-277V	33W	80	4,257	129 lm/W
KT-WLED33-4-850-VDIM /G2	5000K	4'	120-277V	33W	80	4,290	130 lm/W

PHYSICAL SPECIFICATIONS

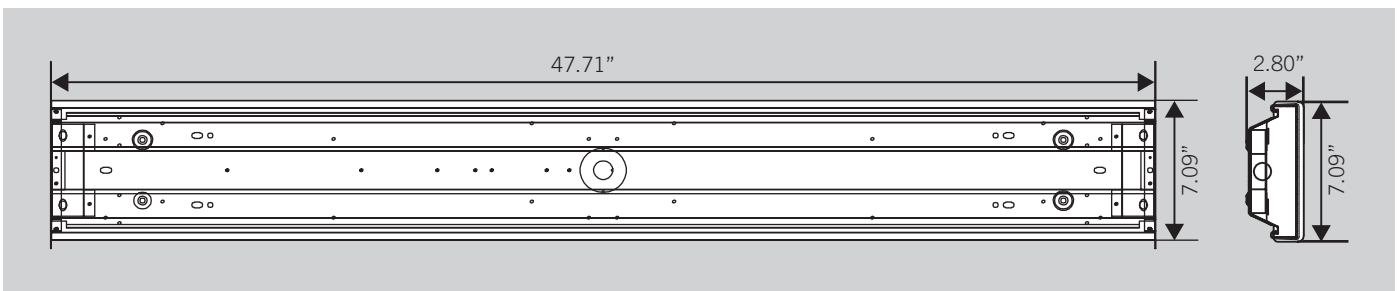




KT-WLED33-4-8XX-VDIM /G2

LED WRAP FIXTURE

CONSTRUCTION OVERVIEW

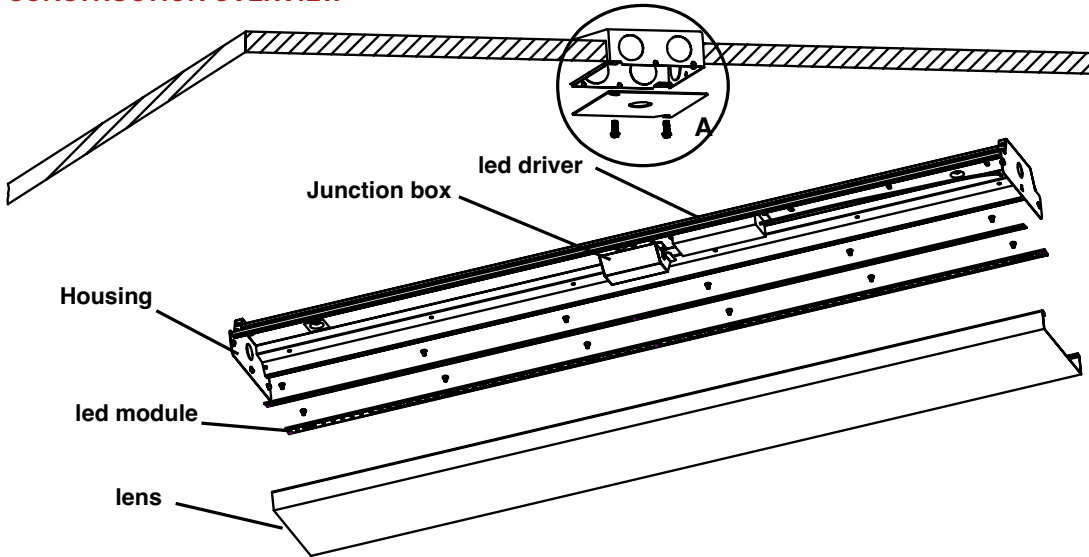

ORDERING INFORMATION

Catalog Number	Pack Quantity	UPC	EASY CODE
KT-WLED33-4-835-VDIM /G2	1	843654140483	YBK-71
KT-WLED33-4-840-VDIM /G2	1	843654140490	EWV-53
KT-WLED33-4-850-VDIM /G2	1	843654140506	IXB-16

CATALOG NUMBER BREAKDOWN

KT-WLED33-4-8XX-VDIM /G2

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED Wrap Fixture
- 3 Wattage
- 4 4' Nominal Length
- 5 80 CRI
- 6 Color Temperature
- 7 0-10V Dimming
- 8 Second Generation