



KTEB-2C72-1-TP-WS

CIRCLINE ELECTRONIC BALLAST



DESCRIPTION

2x FC12T9 + FC16T9 | 120V Input | Normal Power Factor | Rapid Start

STARTING METHOD: Rapid Start
LAMP CONNECTION: Parallel
INPUT VOLTAGE: 120Vac $\pm$ 10%
INPUT FREQUENCY: 50/60 Hz
POWER FACTOR: Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Case Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Ballast Frequency for All Listed Lamps: 20KHz-33KHz
- Lamp End-of-Life Protected


ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
FC8T9 + FC12T9	2	120V	39W	0.60A	0.54	1.46	0.76	1.90	150%
FC12T9 + FC16T9	2	120V	49W	0.73A	0.56	1.68	0.70	1.23	150%
FC12T9	2	120V	46W	0.69A	0.56	1.44	0.70	0.52	150%

WIRING DIAGRAM

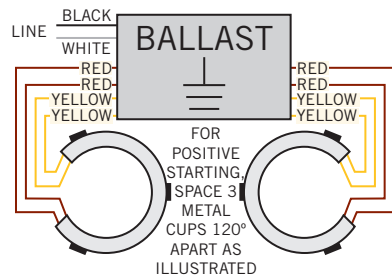

HOT SPOT LOCATION

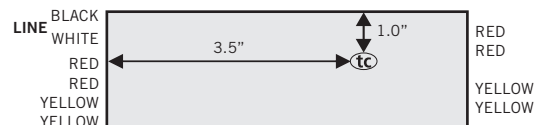




KTEB-2C72-1-TP-WS

CIRCLINE ELECTRONIC BALLAST

PHYSICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	6.46"
WIDTH	1.89"
HEIGHT	1.00"
MOUNTING	6.00"
CASE STYLE	L1

STANDARD LEAD LENGTHS*

BLACK	12"
WHITE	12"
YELLOW	9"
RED	9"

*Consult Keystone for special lead length requirements.

Lead wires are 18 AWG
105°C/600V, solid copper.

CASE MATERIAL: Steel

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-2C72-1-TP-WS-CP	Carton Pack	50	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-2C72-1-TP-WS-CP

Keystone Technologies
Electronic Ballast

No. Circline Wattage
of
Lamps

120
Input

Thermally
Protected

With
Circline
Sockets

Packaging
Style