



KT-HBLED135-2F-8XX-VDIM-P

LED HIGH BAY FIXTURE

DESCRIPTION

Complete compact LED high bay fixture

APPLICATION

Used for commercial and industrial high bay lighting applications





PRODUCT FEATURES

- Architectural grade compact design
- Powered by Keystone 0-10V dimming LED drivers
- Frosted lens eliminates glare
- V-hook and chain mounting accessories included
- Compatible with Keystone SmartSafe emergency LED drivers; KT-EMRG-LED-5-500 -EN /DF or KT-EMRG-LED-12-1200-EN /DF are optimal for fixture level installation; mounting kit KT-HBLED-EM-BR-KIT required (sold separately)
- 0-10V dimming, 10% minimum
- Ambient operating temperature: -20°C/-4°F to 50°C/122°F
- UL Listed 1598: Suitable for dry and damp locations
- THD: <20%
- Power factor > 0.95
- LED chip lifetime, L70 >100,000 hours @ 25°C/77°F ambient fixture temperature

PERFORMANCE SPECIFICATIONS

Catalog Number	Color Temperature	Nominal Length	CRI	Input Voltage	Wattage	Lumen Output	Efficacy
KT-HBLED135-2F-840-VDIM-P	4000K	2'	>82	120-277V	135W	17,600	130 lm/W
KT-HBLED135-2F-850-VDIM-P	5000K	2'	>82	120-277V	135W	17,700	131 lm/W

PHOTOMETRIC SPECIFICATIONS

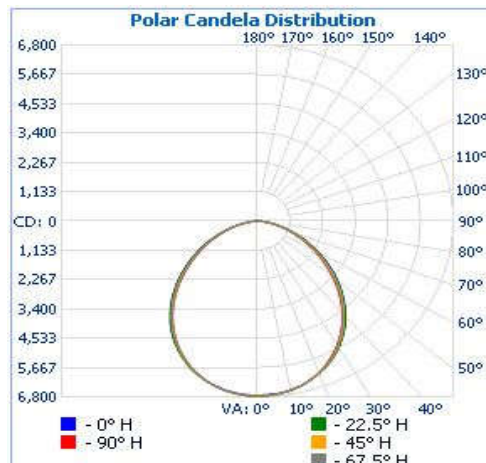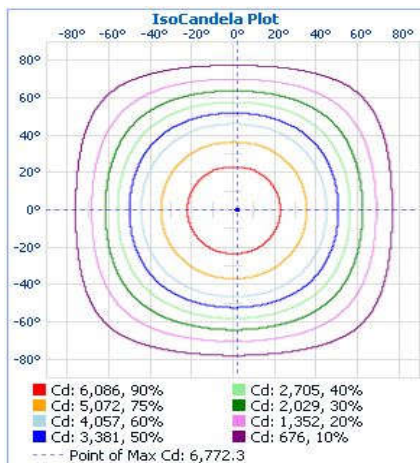


Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	5,206.4	30.3%
0-40	8,422.8	49.1%
0-60	14,219.1	82.8%
60-90	2,902.7	16.9%
70-100	1,106.7	6.4%
90-120	14.5	0.1%
0-90	17,121.9	99.8%
90-180	42.8	0.2%
0-180	17,164.7	100%



KT-HBLED135-2F-8XX-VDIM-P

LED HIGH BAY FIXTURE

PHYSICAL SPECIFICATIONS

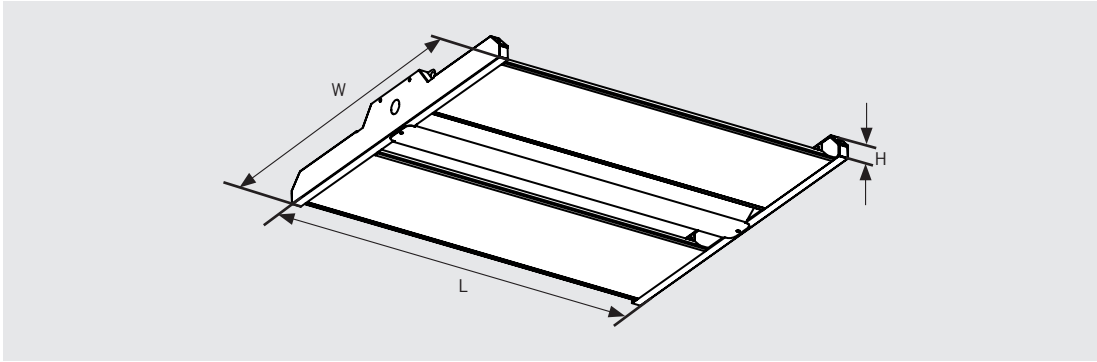

Length	24.40"
Width	15.00"
Height	2.40"
Weight	7 lbs

ORDERING INFORMATION

Order Code	Packaging Style	Pack Quantity	Item Status
KT-HBLED135-2F-8XX-VDIM-P	Carton Pack	1	Active

ACCESSORIES (SOLD SEPARATELY)

Accessory	Catalog Number	Description
High Bay Motion Sensor	HBE-PIR-120/277/347	Dual technology occupancy sensor for LED high bay fixtures
Wire Guard	KT-HBLED-WG-1-KIT	Wire guard for LED high bay fixtures; fits 90W, 105W, 135W, and 175W Keystone 2F high bay fixtures
Pendant Mount Kit	KT-HBLED-PM-1-KIT	Pendant mount kit for LED high bay fixtures; fits all Keystone 2F high bay fixtures
Surface Mount Kit	KT-HBLED-SM-1-KIT	Surface mount kit for LED high bay fixtures; fits all Keystone 2F high bay fixtures
SmartSafe Emergency Battery Backup	KT-EMRG-LED-5-500-EN /DF	5W, 500 lumen SmartSafe emergency battery back-up with dual flex cables
	KT-EMRG-LED-12-1200-EN /DF	12W, 1200 lumen SmartSafe emergency battery back-up with dual flex cables for remote mounting only
Emergency LED Backup Mounting Kit	KT-HBLED-EM-BR-KIT	Designed for use with KT-EMRG-LED-5-500-EN /DF and KT-EMRG-LED-12-1200-EN /DF

CATALOG NUMBER BREAKDOWN

KT-HBLED135-2F-8XX-VDIM-P

1 2 3 4 5 6 7 8

- 1 Keystone Technologies
- 2 LED High Bay Fixture
- 3 Wattage
- 4 2' Nominal Length, Frosted Lens
- 5 800 Series
- 6 Color Temperature
- 7 0-10V Dimming
- 8 Premium Series