



RP-SBL LED SOLAR BOLLARD FIXTURE | ALL-IN-ONE DESIGN




3
YEAR
WARRANTY



8-9
HRS




UP TO
50
HRS




-13°F TO 140°F




32°F TO 149°F



120°



IP65
RATED



REPLACEABLE
BATTERY




L70
>100,000

off-grid, easy installation



extra
durable

classic
bollard
design

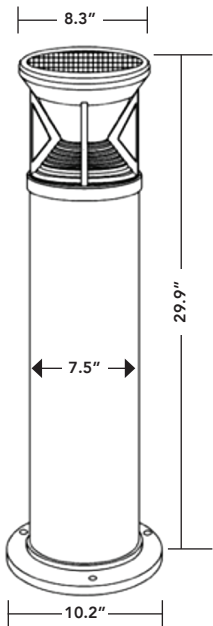

- 2W is comparable to 30W Halogen
- All-in-one design, the solar panel and battery are built right into the LED fixture
- No need for trenching or wiring, this fixture does not connect to any power feed
- Perfect for pathways, waterfronts, parks, schools and perimeters
- 12 hours of 100% brightness with one charge
- Advanced new LiFePO4 battery lasts at least 2000 charge cycles and is replaceable

PART #	UPC	COMPARABLE TO	WATTAGE	LUMENS	CCT (K)	WEIGHT
RP-SBL-2W-40K-BK-G1	844006024659	30W	2W	266	4000K	10.8 lbs

IMPORTANT OPERATING TEMPERATURE INFORMATION The working temperature of the solar fixture is -13°F (-25°C) to +140°F (+60°C). When operating in an environment with a temperature lower than 32°F (0°C) or >149°F (65°C) the battery will stop charging, even if there is sunlight. In that temperature range the battery self protects and will not be damaged. The solar bollard fixture will still light even in those extreme temperatures until the battery is depleted.

