

## SCREW-IN RETROFITS



## FLEX COLOR HIGH BAY



flexCOLOR  
switch  
between  
color temps  
↓

↑  
advanced  
active cooling

- Available in 95W and 140W models replacing up to 400W HID.
- Easily adjust the color temperature via a switch on the unit.
- Dynamic temp control with advanced active cooling supports a longer, brighter life.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Expertly engineered to work efficiently in enclosed fixtures & damp environments, while also protected against insects & dust.
- LED-8232-HV: 277-480V.  
(can be used on 347V)
- USA designed & specified LED driver.
- Continuously dimmable down to 20% using a wired 0-10V dimming circuit. Lamps also include 12V auxiliary power for sensors.



120/  
277V  
ALSO WORKS  
ON 208V & 240V

UL TYPE  
B  
BALLAST  
BYPASS

MOGUL BASE

80+  
CRI

50,000hrs  
RATED LIFE

-40°F TO 113°F  
OPERATING  
TEMP

ENCLOSED  
FIXTURES



6kA  
SURGE  
PROTECTION

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	VOLTAGE	BASE	DLC CODE
LED-8236M345D*	844006077662	250W HID	95W	13000	3000K/4000K/5000K	120-277V	EX39	S-X42DN1
LED-8236M345CD*	844006077693	250W HID	95W	13000	3000K/4000K/5000K	220-347V	EX39	S-DPWN54
LED-8232M345D	844006077686	400W HID	140W	19500	3000K/4000K/5000K	120-277V	EX39	S-V65KRY
LED-8232M345D-HV*	844006077679	400W HID	140W	19500	3000K/4000K/5000K	277-480V	EX39	S-ETHKAF





# HIGH BAY

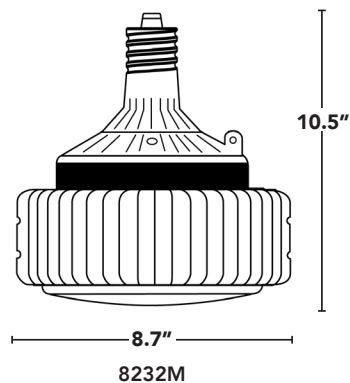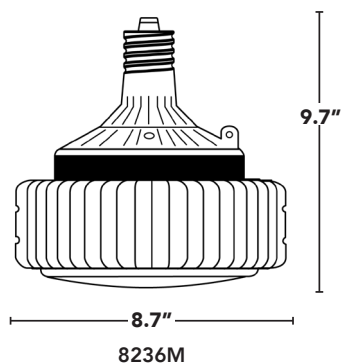

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	VOLTAGE	BASE	DLC CODE
LED-8236M345D*	844006077662	250W HID	95W	13000	3000K/4000K/5000K	120-277V	EX39	S-X42DN1
LED-8236M345CD*	844006077693	250W HID	95W	13000	3000K/4000K/5000K	220-347V	EX39	S-DPWN54
LED-8232M345D	844006077686	400W HID	140W	19500	3000K/4000K/5000K	120-277V	EX39	S-V65KRY
LED-8232M345D-HV*	844006077679	400W HID	140W	19500	3000K/4000K/5000K	277-480V	EX39	S-ETHKAF