


/ Style 1: Grid/Soffit Applications /

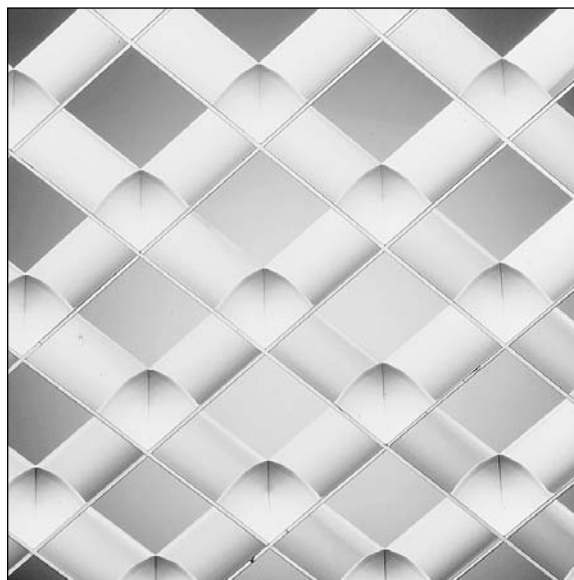
PART #	BODY SIZE	GRID/SOFFIT APPLICATIONS
P2-24-1	---	23 3/4" x 47 3/4"
P2-22-1	---	23 3/4" x 23 3/4"
P2-14-1	---	11 3/4" x 47 3/4"

/ Style 4: Fixture Application /

PART #	BODY SIZE	MAX TRIM SIZE
P2-24-4	20 3/8" x 44 3/8"	22 3/4" x 46 3/4"
P2-22-4	22 3/4" x 20 3/8"	22 3/4" x 22 3/4"
P2-14-4	9 1/4" x 45 1/4"	11 1/2" x 47 1/2"

/ Style 5: Air Handling Application /

PART #	BODY SIZE	MAX TRIM SIZE
P2-24-5	19 1/8" x 43 5/16"	22 3/4" x 46 3/4"


P2 PARABOLIC LOUVER
(1 1/2" CELL)

The P2 part numbers are designated in styrene with a Specular Silver finish.

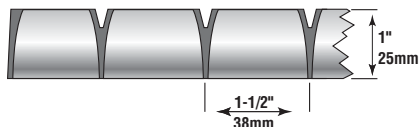
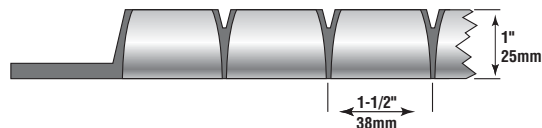
Finishes:

- Specular **Gold** • Semi-Specular Silver
- **Black** Styrene • **White** Acrylic

Please add **bold letter to end of part #. Example: P2-24-1**B** (**Black**)

Product Description:

- * 1 1/2" x 1 1/2" x 1" deep injection molded plastic parabolic louver.
- * Meets the demands of both efficiency and luminance control.
- * Molded in a number of panel configurations. P2 flange louvers for fixture applications. P2 non-flange louvers for grid, continuous row and non-standard sizes.

STYLE 1

STYLES 4 & 5

Visual Comfort Probability

CEILING HEIGHT	MEAN	MODE
8.5' (2.6M)	98	99
10' (3M)	99	99

64%

Cat. 2
38°

52°