

PROJECT NAME:	_CATALOG NUMBER:		
NOTES:	FIXTURE SCHEDULE:		

Page: 1 of 2

DIRECT/INDIRECT 1'x4' PENDANT

MLFP SERIES



PRODUCT DESCRIPTION:


The Direct/Indirect 1x4 Pendant is a unique product offering which provides a 70:30 split of light between the direct surfaces below and the ambient area above the fixture. The fixture provides both functional light and a design statement to any space where it is utilized. The unique design showcases a nearly transparent luminaire when off and excellent uniformity and efficiency when on. The Direct/Indirect 1x4 Pendant is a commercial pendant lighting fixture utilizing an advanced LED optical system to achieve superior performance.


FEATURES:

- Standard 0-10V dimming
- 5 year limited warranty
- CRI: ≥80
- Light distribution 70% / 30%
- Transparent lens appearance on clear lens models
- Standard white finish
- 8 foot suspension cables included
- Suitable for damp locations

MODEL SELECTION		Typical order example: MLFP14DI3640ICL						
MLFP	14	DI	36		1			
FAMILY	SIZE	DIRECT/INDIRECT	WATTAGE	сст	TYPE OF LIGHT	LENS OPTION		
MLFP= Flat Panel	14= 1'X4'	DI= Direct/Indirect	36= 40W	35= 3500K 40= 4000K	I= Indirect/Direct	BLANK= White CL= Clear		

DIMENSIONS:

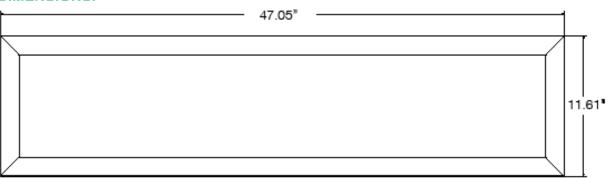





DIRECT/INDIRECT 1'x4' PENDANT MLFP SERIES

Page: 2 of 2

SPECIFICATIONS:		MLFP14Dl36XXI	MLFP14DI36XXICL		
ITEM	SPECIFICATION	DETAILS	DETAILS		
	Power Consumption (W)	39.4W	39.3W		
	Lumens Delivered (Im)	4393	4721		
	Efficacy (lm/W)	111	120		
GENERAL PERFORMANCE	CRI	≥80			
	Color Temperature (K)	3000, 3500, 4000			
	L70 Lifetime (hours)	50,000			
	Color Consistency	Proprietary binning for uniform color			
ELECTRICAL	Power Factor	≥0.9			
	Input Voltage	120-277V			
	Compatible Dimmers	0-10V Dimming			
	Weight	4.5 lbs			
PHYSICAL	Mounting	Pendant			
PHYSICAL	Operating Temperature	-4°F to 104°F			
	Humidity	10-80% RH, non-condensing			
QUALIFICATION	Qualification	FCC, cETLus, DLC 4.2 Standard			
	Material Usage	RoHS compliant; no mercury			
QUALIFICATION	Environment	Indoor			
	Warranty	5 years			

ORDERING TABLE:

ORDER CODE	MODEL NUMBER	WATTAGE	ССТ	TYPE OF LIGHT	LENS TYPE
14098821	MLFP14DI3635I	40W	3500K	INDIRECT/DIRECT	WHITE
14098822	MLFP14DI3640ICL	40W	4000K	INDIRECT/DIRECT	CLEAR

Phone: 1-800-555-5629 | Fax: 973-244-7333 | Web: www.maxlite.com | E-mail: info@maxlite.com | Revised: 07/24/18