


## Classic Large Wallpack LED Series

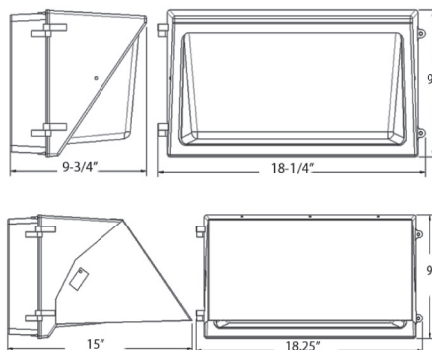


Shown with Optional Visor

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ Die Cast Aluminum Housing - Bronze or White Finish
- ▶ High Impact Heat Resistant Borosilicate Glass
- ▶ 4 Threaded Apertures - (1)Top, (1)Back, (2)Sides
- ▶ Stainless Steel Hardware
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Photo Control (not included) can be installed on fixture
- ▶ Light Pattern: 115° Beam Angle
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ Weight: 11 Lbs
- ▶ Power Factor: .98
- ▶ CRI: 83
- ▶ IP54 (NEMA 3) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty
- ▶ Visor (Order Separately for Dark Sky Applications)

| Cat. No. | Old Cat No.              | Watts | Volts   | Housing Color | Delivered Lumens | Replaces Metal Halide | Dimming      | Weight (Lbs) | Case Qty |
|----------|--------------------------|-------|---------|---------------|------------------|-----------------------|--------------|--------------|----------|
| 71440A   | 71440                    | 120   | 120-277 | Bronze        | 13,520           | 400W                  | 0-10V/PWM/VR | 22           | 1        |
| 71441A   | 71441                    | 120   | 120-277 | White         | 13,520           | 400W                  | 0-10V/PWM/VR | 22           | 1        |
| 71442    | Full Cutoff Visor Bronze |       |         |               |                  |                       |              |              | 1        |
| 71443    | Full Cutoff Visor White  |       |         |               |                  |                       |              |              | 1        |

## Classic Dark Sky Large Wallpack

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ Die Cast Aluminum Housing - Bronze Finish
- ▶ High Impact Heat Resistant Polycarbonate Lens
- ▶ 4 Threaded Apertures - (1)Top, (1)Back, (2)Sides
- ▶ Stainless Steel Hardware
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Power Factor: .98
- ▶ Light Pattern: 122° Beam Angle
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 83
- ▶ Voltage: 120/208/240/277VAC
- ▶ IP54 (NEMA 3) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty



| Cat. No. | Watts | Housing Color | Delivered Lumens | Replaces Metal Halide | Dimming      | Dimensions (Inches) |         |        | Weight (Lbs) | Case Qty |
|----------|-------|---------------|------------------|-----------------------|--------------|---------------------|---------|--------|--------------|----------|
|          |       |               |                  |                       |              | A                   | B       | C      |              |          |
| 71452    | 50    | Bronze        | 5,798            | 150W                  | N/A          | 14-3/8"             | 9-3/8"  | 8-3/8" | 11           | 1        |
| 71453    | 50    | White         | 5,798            | 150W                  | N/A          | 14-3/8"             | 9-3/8"  | 8-3/8" | 11           | 1        |
| 71454    | 80    | Bronze        | 9,128            | 250W                  | 0-10V/PWM/VR | 14-3/8"             | 9-3/8"  | 8-3/8" | 11           | 1        |
| 71455    | 80    | White         | 9,128            | 250W                  | 0-10V/PWM/VR | 14-3/8"             | 9-3/8"  | 8-3/8" | 11           | 1        |
| 71456    | 135   | Bronze        | 14,000           | 400W                  | 0-10V/PWM/VR | 18-1/8"             | 10-7/4" | 9-3/4" | 13           | 1        |