




LED Twist-Lock Style Photocell

CAT#: 39112

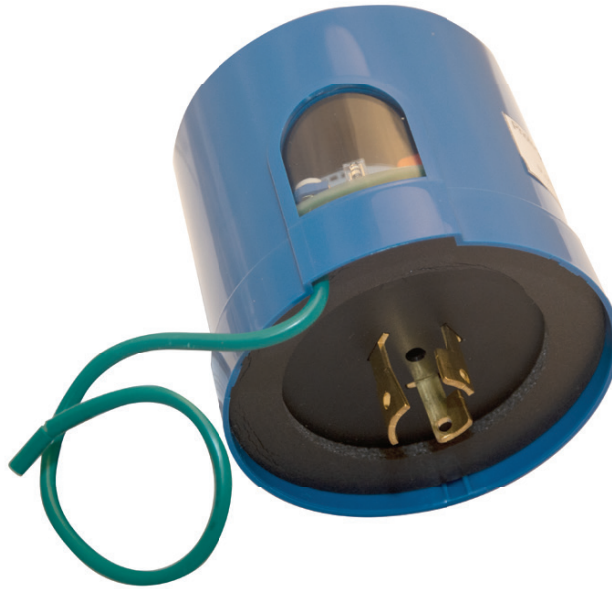

Features:

- LED Compatible
- Series or Parallel Connection
- L-N, L-G, N-G Protection
- Safety Thermal Fusing
- MCU Circuitry - Conformal Coated PCB
- Gas Discharge Tube for Extended Life
- Diagnostic Indicator Light
- MOV Surge Suppression
- Delay On: 6-12 Seconds
- Delay Off: 6-18 Seconds
- Fail On
- 25kA
- 20kV
- Vmax - 20kV
- MCOV - 320V/550V
- Polycarbonate Housing
- IP65 Outdoor Rated
- Operating Temp: -40° To 158°
- 1 Year Warranty
- cULus Listed

Surge Protection Performance Characteristics

Product Model	Operating Voltage	I _n	I _{MAX}	U _{oc}	MCOV	Voltage Protection Rating	Thermal Fusing	3-Mode Protection	Gas Tube	Diagnostic Light	Operating Temperature	Connection
CAT#: 39112	120V-277V	10kA	25kA	20kV	320V	1300V	✓	✓	✓	✓	-40F ~ +158F	Series