




# MORRIS #: 71150A

## DOB Slim-Line Wall Pack

### 120-277V 15W 5000K Bronze

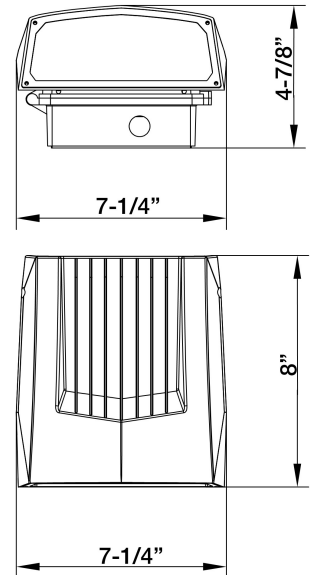


#### Features:

- Hinged Bracket - 0-90° Angle Tilt Adjustment
  - Lumiled LUXEON 3030 LEDs
  - Integral Cooling Fin releases the heat efficiently to maintain the life of LEDs & LED driver
  - Corrosion resistant Die Cast
- Aluminum housing  
Clear Tempered Glass Lens  
Superior Architectural Powder Coat finish  
Bronze Housing  
Environment: IP65 Wet Location Rated  
5 Year Warranty

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	
71150A	15W	120-277V	2,044	5000K	>70	N/A	103°	136	

#### PHOTOMETRY

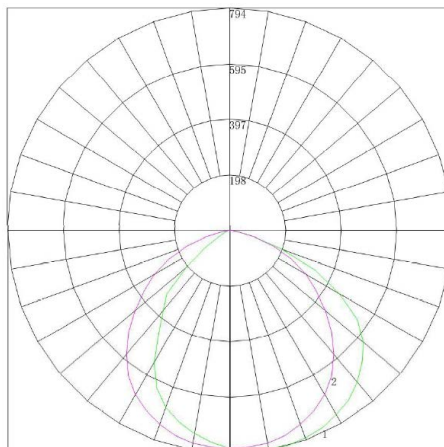



# MORRIS #: 71150A

## DOB Slim-Line Wall Pack

### 120-277V 15W 5000K Bronze

#### Technical Specifications:

##### **Electrical:**

Input Voltage: 120-277V

Current: .12A @ 120V

Frequency: 50/60Hz

Power Factor:  $\geq 0.99$

THD:  $>10\%$

##### **Product Parameters:**

15 Watts

Lumens: 2,044

Efficacy: 136 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

##### **Chromaticity Measurements:**

Beam Angle:  $103^\circ$

CRI:  $>70$

R9: -29

DUV: -0.0010

Chromaticity (x,y):  $x=0.4335$   $y=0.4010$

Chromaticity (u,v):  $u=0.2497$   $v=0.3464$

##### **Component Specifications:**

LED: LumiLED LUXEON 3030

Driver: 100-277V 50/60Hz

Driver Output Volts: 175V/DC

Driver Output Amps: 2.45A

2.5KV Surge Protection

##### **Dimming:**

N/A

##### **Operating Temperature:**

Minimum Starting  $-31^\circ\text{F}$  -  $131^\circ\text{F}$

##### **Construction:**

**Housing:** Die Cast Aluminum Housing

Powder Coated

**IP Rating:** IP65 Wet Location Rated

**Lens Material:** PC

**Mounting:** Wall Mount

**Listings:** cULus

Carton Qty: 1

##### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).