




MORRIS #: 71153A

DOB Slim-Line Wall Pack

120-277V 30W 5000K White

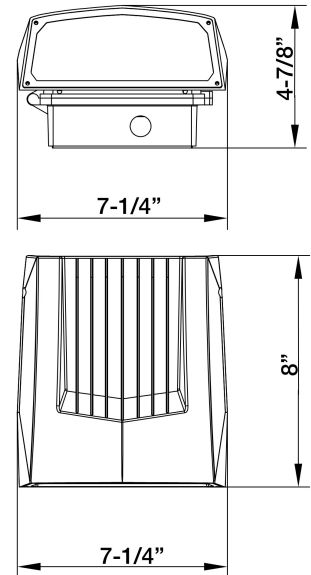


Features:

- Hinged Bracket - 0-90° Angle Tilt Adjustment
- Lumiled LUXEON 3030 LEDs
- Integral Cooling Fin releases the heat efficiently to maintain the life of LEDs & LED driver
- Corrosion resistant Die Cast

Aluminum housing
Clear Tempered Glass Lens
Superior Architectural Powder Coat finish
Bronze Housing
Environment: IP65 Wet Location Rated
5 Year Warranty

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	
71152A	30W	120-277V	4,008	5000K	72	N/A	103°	134	

PHOTOMETRY

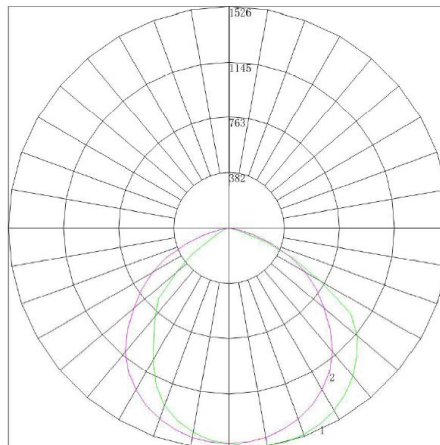



MORRIS #: 71152A

DOB Slim-Line Wall Pack

120-277V 30W 5000K Bronze

Technical Specifications:

Electrical:

Input Voltage: 120-277V

Current: .12A @ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.99

THD: $> 10\%$

Product Parameters:

30 Watts

Lumens: 4,008

Efficacy: 134 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 103°

CRI: 72

R9: -30

DUV: -0.0010

Chromaticity (x,y): $x=0.4335$ $y=0.4004$

Chromaticity (u,v): $u=0.2499$ $v=0.3463$

Component Specifications:

LED: LumiLED LUXEON 3030

Driver: 100-277V 50/60Hz

Driver Output Volts: 175V/DC

Driver Output Amps: 2.45A

2.5KV Surge Protection

Dimming:

N/A

Operating Temperature:

Minimum Starting -31°F - 131°F

Construction:

Housing: Die Cast Aluminum Housing

Powder Coated

IP Rating: IP65 Wet Location Rated

Lens Material: PC

Mounting: Wall Mount

Listings: cULus

Carton Qty: 1

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).