




Architectural Flood Light

50 Watt 120-277V 5000K

Morris CAT#: 71346B


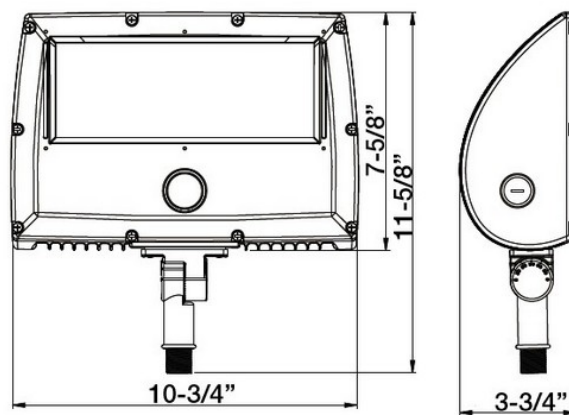


Features:

- Replaces HID, Metal Halide or high pressure sodium floods.
- Integral Cooling Fin releases heat efficiently to maintain the Life of LED's & LED Driver
- Corrosion resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Housing Color: Bronze
- Superior Architectural Powder Coat Finish
- Stainless Steel hardware
- 0-10V Dimmable
- Operating Temperature: -40°F to 104°F
- 50,000+ Hour life expectancy
- IP65 rated
- Listings: cETLus, DLC
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	DLC PRODUCT ID #:
71346B	Bronze	50W	6,630	5000K	120/208/240/277V	Wide Beam	133m/w	PL75X9PAMCMA

PHOTOMETRY

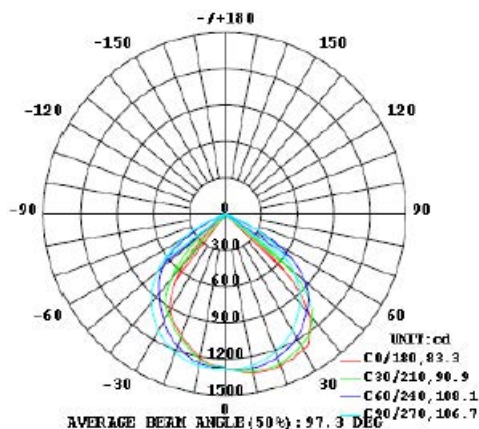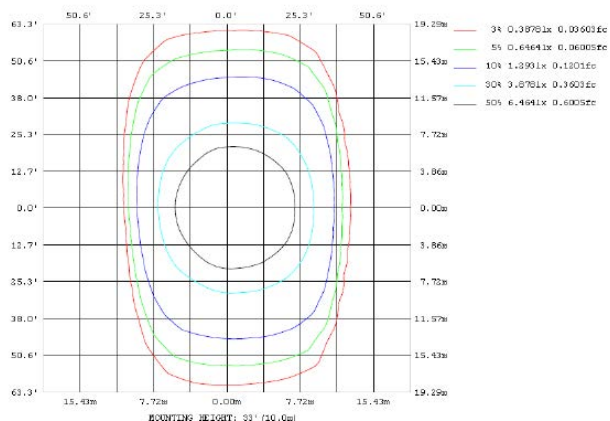

Architectural Flood Light

50 Watt 120-277V 5000K

Morris CAT#: 71346B

Technical Specifications:

Electrical:

Input Voltage: 120/208/240/277V

Current: .0.13A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 15% @ 120V

Product Parameters:

50 Watts

Efficacy: 133 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromaticity Measurements:

Beam Angle: 97.3°

CRI: 70

R9: -22

DUV: 0.0023

Chromaticity (x,y): $x=0.3457$; $y=0.3567$

Chromaticity (u,v): $u=0.2098$; $v=0.4872$

Component Specifications:

LED: SMD2835

Driver: 120/208/240/277V

Frequency: 50-60HZ

Dimming: 0-10V

Operating Temperature:

Minimum Starting: -40°F to 104°F

Construction:

Housing: Corrosion resistant Die Cast Aluminum Housing

IP Rating: IP65 Wet Location

Lens Material: Polycarbonate

Mounting: 1/2" Adjustable Knuckle, Trunnion Mount (Sold Separately)

Listings: cETLus, DLC Listed

Accessories Available (Sold Separately):

71361B - Visor

71359B - Trunnion Mount

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).