



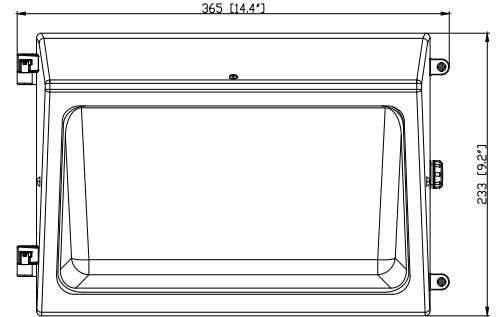

MORRIS CAT#: 71429D

LED White Medium Wall Pack

120-277V, 75W, 5000K






Includes Built-In Photocell!

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 99°
- Certifications: ETL/cETL, DLC
- Wet Location Rated
- 5 Year Warranty

CAT. NO.	WATTS	COLOR TEMP	VOLTS	HOUSING COLOR	DELIVERED LUMENS	REPLACES METAL HALIDE	DIMMING	CASE QTY	EACH
MEDIUM WALL PACKS									
71429D*	75w	5000K	120-277v	White	9246	250W	0-10V	1	

PHOTOMETRY:

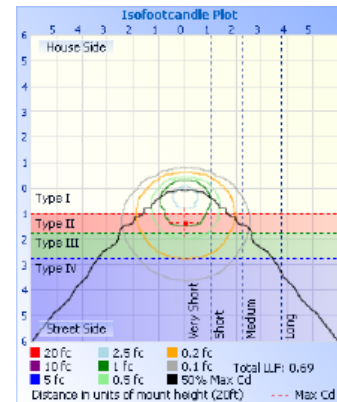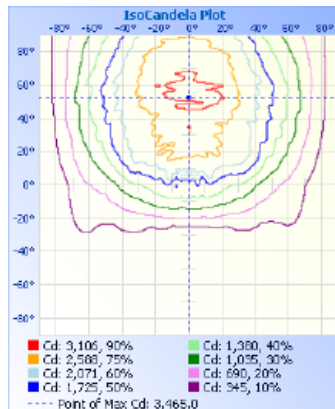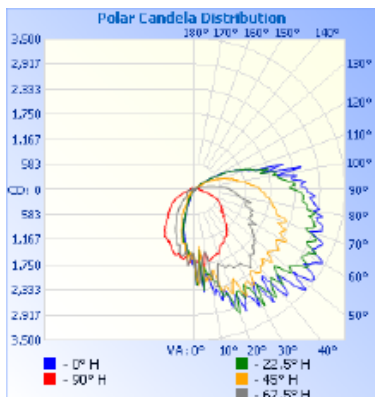



LED Medium WallPack

Technical Specifications

Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor: $\geq .90$

THD: $<20\%$ @120V

Product Parameters:

Efficacy: 123 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 99°

BUG Rating: B1-U5-G5

CRI: 70

R9: -34

Component Specifications:

LED

120V-277V

Dimming: 0-10V

Operating Temperature: -40°F - 104°F

Construction:

Housing: Die Cast Aluminum Alloy Powder

Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens

Lens UV Resistant Fire Resistant

Ingress Protection: WET location Rated

Mounting: Wall Mount

Listings: cETLus, DLC

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).