




Morris CAT#: 71452C

LED Classic Full Cutoff Medium Wallpacks

120-277V, 5000K, 45W

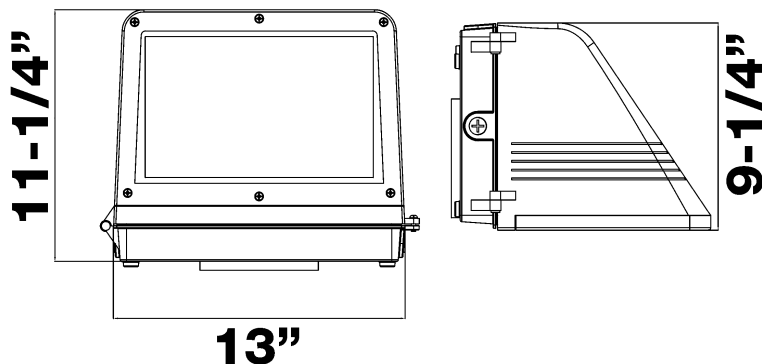


Features:

- Use in general lighting applications: Parking Lots & Building Security
- Lumiled LUXEON 3030 LEDs
- Die Cast Aluminum Housing
- Polyester Powder Coat Finish
- Housing Color: Bronze
- High Quality Tempered Glass Lens
- 4 Threaded K/Os -(1)Top, (1)Back, (2)Sides
- Photocontrol (not included) can be installed on fixture
- Stainless Steel Hardware
- Operation Temperature: -4°F to 104°F
- Voltage: 120/208/240/277V
- cETLus listed for Wet Locations
- 5 Year Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
71452C	45	120-277	4,598	5000K	>72	N/A	H113° V114.5°	102	PLRR1H088GS8

Photometry:

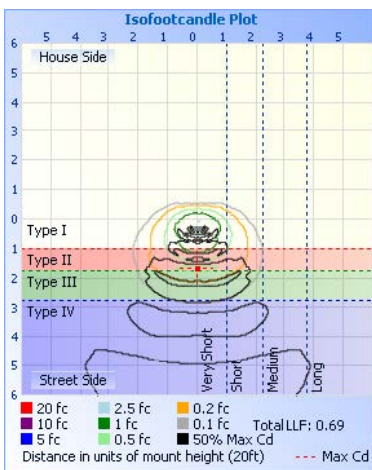



Morris CAT#: 71452C

LED Classic Full Cutoff Medium Wallpacks

120-277V, 5000K, 45W

Electrical:

Input Voltage: 120V-277V

Current: 0.47@ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.90

THD: <20% @120V

Operating Temperature: -4°F - 131°F

Construction:

Housing: Die Cast Aluminum Alloy
Powder Coated Finish

Lens Material: Prismatic Borosilicate Glass Lens
UV Resistant Fire Resistant

Product Parameters:

Efficacy: 102 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

IP Rating: IP54 suitable for wet locations

Mounting: Wall Mount

Listings: cETLus, DLC

Chromaticity Measurements:

Beam Angle: H 113° V 114.5°

BUG Rating: B3-U3-G2

CRI: 72

R9: -12

Accessories:

Emergency Backup - CAT#: 71465B

LED Button Style Photocell - CAT#: 39100

LED Shutter Style Photocell - CAT#: 39102

LED Pencil Style Photocell - CAT#: 39104

Component Specifications:

LED: Lumileds 3030

120V-277V

50-60HZ

Driver Output Volts: 50-70V

Driver Output Amps: 1200mA

4KV Surge Protection

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

Dimming: 0-10V