





MORRIS #: 71533B

LED SMALL FLOOD - BRONZE

CCT & WATTAGE TUNABLE


120-277V, 40/50/60W, 3000-5000K

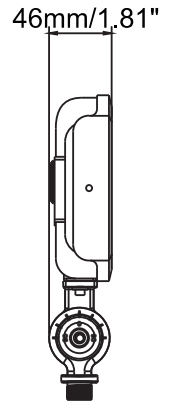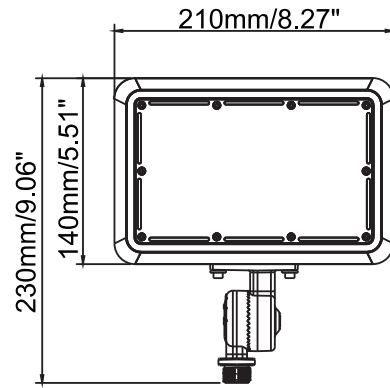

Features:

- Wattage Tunable: 30W/40W/50W
- Color Tunable: 3000K, 4000K, 5000K
- Input Voltage: 120-277VAC
- Corrosion Resistant Die Cast Aluminum Housing
- Transparent PC Lens
- Bronze Housing
- On/Off Photocontrol Included
- 0-10V Dimmable
- Operating Temperature: -40°F to 113°F
- Mount: 1/2" Knuckle installed with Yoke Mount included in box
- IP65 Wet Location Rated
- 50,000+ Hour LED Life Expectancy
- Listings: cULus
- 5 Year Warranty

Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	
71533B	40/50/60W	120-277V	8,950@4K	3K;4K;5K	>70	0-10V	7H7V	149	

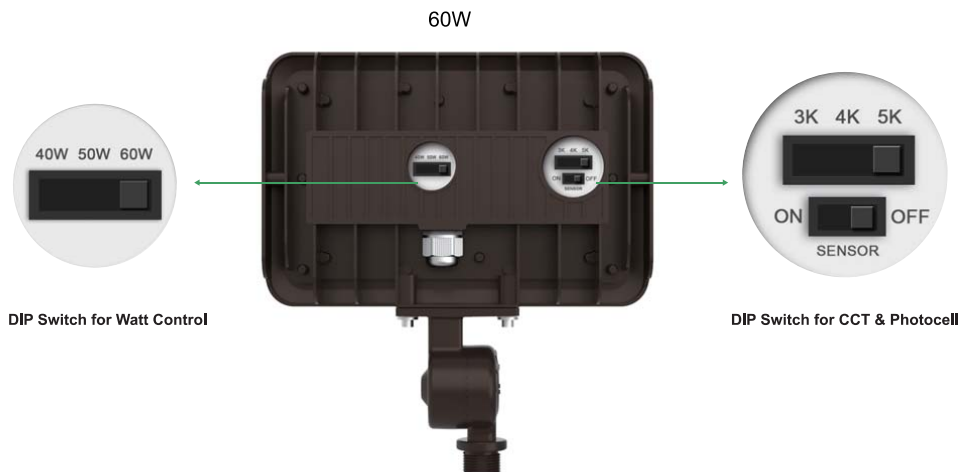



MORRIS #: 71533B

LED SMALL FLOOD - BRONZE

CCT & WATTAGE TUNABLE

120-277V, 40/50/60W, 3000-5000K

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: 1.01A @ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.93

THD: $>20\%$ @ 120V

Product Parameters:

40/50/60 Watts

Lumens: 8,170@3K, 8,950@4K, 8,710@5K

Efficacy: 149 Lumens Per Watt

50,000+ L70 Life Span

CCT: 3K (WW); 4K (NW); 5K (CW)

Chromaticity Measurements:

Beam Angle: 7H7V

CRI: >70

R9: 9

DUV: -0.00012

Component Specifications:

LED: Seoul 2835

Driver: 120-277V 50/60Hz

Driver Output Volts: 150V/DC

Driver Output Amps: 1.0A

2KV Surge Protection

Dimming:

0-10V

Operating Temperature:

Minimum Starting -40°F - 113°F

Construction:

Housing: Die Cast Aluminum Housing

Powder Coated

IP Rating: IP65 Wet Location Rated

Lens Material: PC

Mounting: 1/2" Knuckle, Yoke

Listings: cULus

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).