




MORRIS CAT#: 71631C

LED Medium Classic WallPack

45W, 120-277V, 4000K Bronze

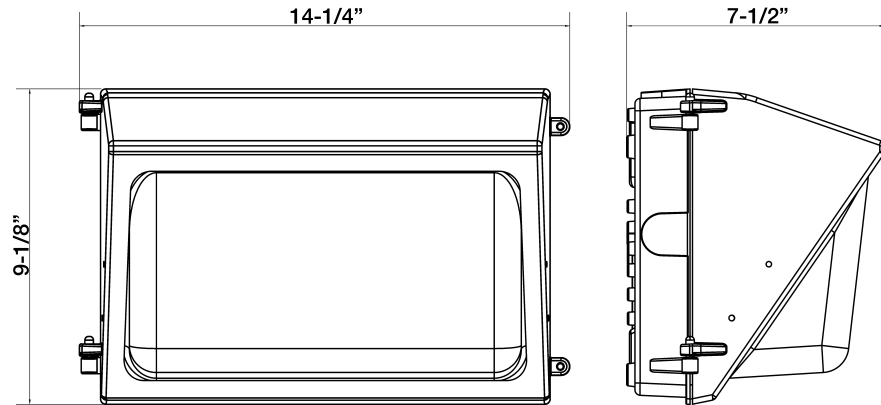


Features:

- Use in general lighting applications: Parking Lots & Building Security
 - Die cast Aluminum Housing, polyester powder coating
 - Aluminum Heat Sink, customized fin design for optimal heat dissipation
 - Heat Resistant Directed Optics
 - Polycarbonate Lens
- 4KV surge protector inside of power supply
 - 5 Year Limited Warranty
 - IP65 rated
 - Certification: ETL/cETL
 - Environment: Suitable for Wet Locations



Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
71631C	45W	120-277	5,789	4000K	>72	0-10V	Outdoor	129	PL55IJX2B8NB

PHOTOMETRY

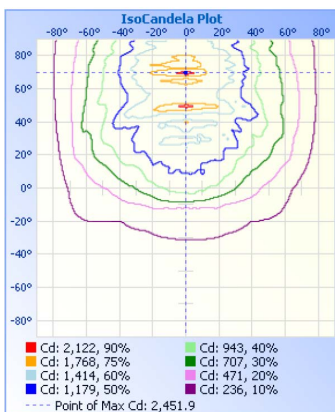

Illuminance at a Distance			
Center Beam fc	Beam Width		
17.0ft	3.40 fc	18.1 ft	26.1 ft
34.0ft	0.85 fc	36.1 ft	52.2 ft
51.0ft	0.38 fc	54.2 ft	78.3 ft
68.0ft	0.21 fc	72.3 ft	104.4 ft
85.0ft	0.14 fc	90.4 ft	130.5 ft
102.0ft	0.09 fc	108.4 ft	156.6 ft

■ Vert. Spread: 56.0°
■ Horiz. Spread: 75.0°

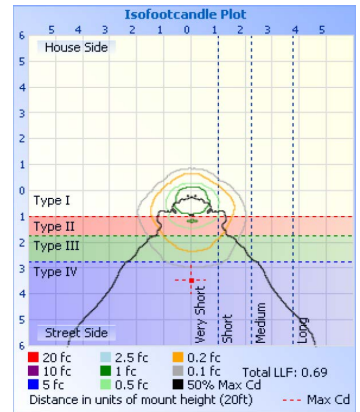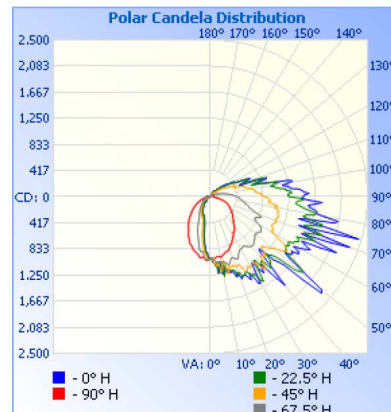



MORRIS CAT#: 71631C

LED Medium Classic WallPack

45W, 120-277V, 4000K Bronze

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .37A@120V

Frequency: 50/60Hz

Power Factor: $\geq .9$

THD: >20%

Product Parameters:

Input Watts: 45W

Lumens: 5,789

Efficacy: 129 lumens per watt

50,000+ Hour L70 Life Span

CCT: 4000K (Cool White)

Chromacity

Measurements:

Beam Angle: 365° H X 242° V

BUG Rating: B1-U2-G3

CRI: >72

R9: -17

Component Specifications:

LED: Lumileds 3030

120-277V, 50-60Hz

Driver Output Volts: 50-70V

Driver Output Amps: 1200mA

4KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting: -40°F to 131°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

Lens UV Resistant, Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL, DLC

Accessories:

Emergency Backup - CAT#: 71465B

LED Button Style Photocell - CAT#: 39100

LED Shutter Style Photocell - CAT#: 39102

LED Pencil Style Photocell - CAT#: 39104

Semi-Cutoff Visor - Bronze - CAT#: 71461B

Wire Guard - CAT#: 71459B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).