


MORRIS CAT#: 71638C LED Small Classic WallPack 60W, 120-277V, 5000K, Bronze









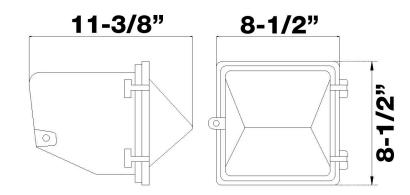

Features:

 Use in general lighting applications: Parking Lots & Building Security

• Die cast Aluminum Housing, polyester powder coating

 Aluminum Heat Sink, customized fin design for optimal heat dissipation

Heat Resistant Directed Optics

Polycarbonate Lens

4KV surge protector inside of power supply

5 Year Limited Warranty


IP65 rated

Certification: ETL/cETL

Environment: Suitable for Wet Locations

Part#	Input/ Wattage	Volts	Lumens	ССТ	CRI	Dimming	Light Pattern	Lumens/ Watt
71638C	60W	120-277	7,133	5000K	72	0-10V	Garage	134

PHOTOMETRY



www.morrisproducts.com



MORRIS CAT#: 71638C LED Small Classic WallPack 60W, 120-277V, 5000K Bronze

Technical Specifications:

Electrical:

Input Voltage: 120V-277V Current: .32A@120V Frequency: 50/60Hz Power Factor: ≥.9

THD: 6%

Product Parameters:

Input Watts: 60W

Lumens: 7,133

Efficacy: 134 lumens per watt 50,000+ Hour L70 Life Span CCT: 5000K (Cool White)

Chromacity Measurements:

Beam Angle: 365° H X 256° V

BUG Rating: B1-U4-G5

CRI: 72 R9: -25 **Operating Temperature:**

Minimum Starting: -40°F to 131°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

Lens UV Resistant, Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL, DLC

Accessories:

Emergency Backup - CAT#: 71467B

LED Button Style Photocell - CAT#: 39100 LED Shutter Style Photocell - CAT#: 39102 LED Pencil Style Photocell - CAT#: 39104

Component Specifications:

LED: Lumileds 3030 120-277V, 50-60Hz

Driver Output Volts: 50-70V Driver Output Amps: 1200mA

4KV Surge Protection

Dimming: 0-10V

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

www.morrisproducts.com