



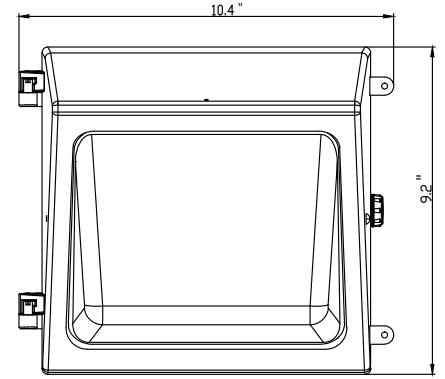

# 71638D - LED BRONZE SMALL WALLPACK

120-277V 60W 5000K

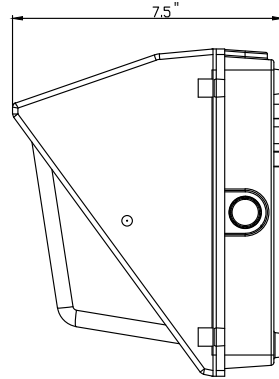





**Includes Built-In Photocell!**

## FEATURES:

- Die Cast Aluminum Housing/ Stainless Hardware
- Polyester White Powder Coating
- Aluminum Heat Sink & Customized Fin Design for Optimal Heat Dissipation
- Heat Resistant Optics
- Borosilicate Glass Lens
- 0-10V Dimmable
- Photocontrol included with on/off switch
- Operation Temperature: -40°F - 104°F
- Emergency Battery Backup (Sold Separately)
- Light Pattern: 112°
- Certifications: ETL/cETL, DLC
- Wet Location Rated
- DLC PRODUCT ID#: S-36BUS4
- 5 Year Warranty

CAT NO.	HOUSING COLOR	WATTAGE	CCT	LUMENS	VOLTAGE	REPLACES METAL HALIDE	DIMMING
71638D	Bronze	60W	5000K	7,435	120-277V	175W	0-10V

## PHOTOMETRY:

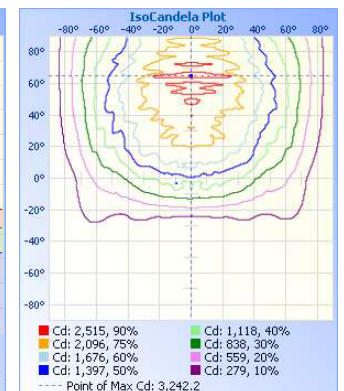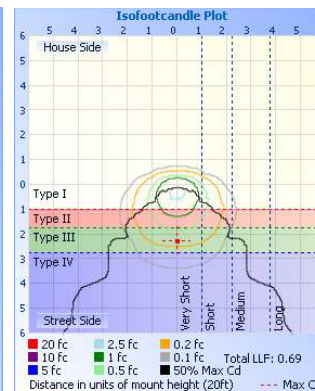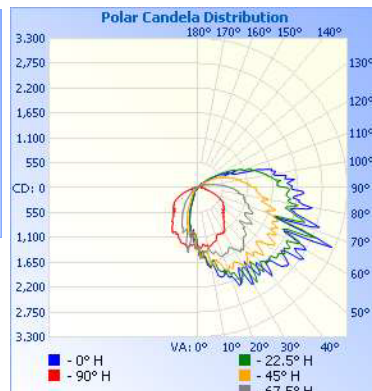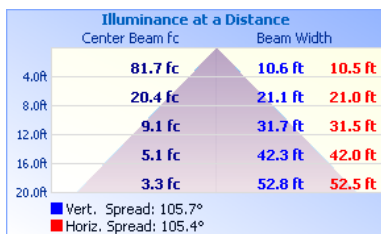



# 71638D - LED BRONZE SMALL WALLPACK

120-277V 60W 5000K

## TECHNICAL SPECIFICATIONS:

### Electrical:

Input Voltage: 120V-277V

Current: see chart pg 1

Frequency: 50/60Hz

Power Factor:  $\geq .90$  @120v

THD:  $<20\%$  @120V

### Product Parameters:

Efficacy: 129 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

### Chromaticity Measurements:

Beam Angle: 112°

BUG Rating: B1-U4-G4

CRI: 74

R9: -32

Rg: 93

Rf: 76

### Component Specifications:

LED

120V-277V

**Dimming:** 0-10V

**Surge Protection:** 6kV

**Operating Temperature:** -40°F - 104°F

### Construction:

Housing: Die Cast Aluminum Alloy Powder Coated

Finish

Lens Material: Prismatic Borosilicate Glass Lens

Lens UV Resistant Fire Resistant

Ingress Protection: IP65 Wet Location Rated

**Mounting:** Wall Mount

### Listings:

cETLus

DLC PRODUCT ID#: S-36BUS4

---

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

\*The ON/OFF photocell is pre-installed in the fixture and the default switch setting is ON. The photocell must be turned OFF for the fixture to operate when there is ambient or bright light.