




1 X 4 LED EdgeLit Panel Cat#71752A

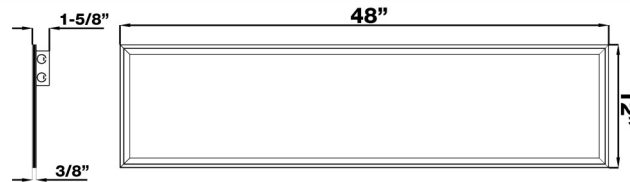

Features:

Ideal for New Construction or Troffer Replacement
in Offices, Hallways, Conference Rooms etc.

Aluminum/Zinc Alloy Backplate
& Aluminum Frame

Edgelit

Operating Temperature: -22°F - 104°F

PMMA Light Guide Panel


IP20 Dry Location Rated

Flicker Free Driver

5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Light Pattern	Lumens/ Watt	DLC #
71752A	White	40	4600	5000	120-277	0-10V	120°	113	PLGDECM1L758

PHOTOMETRY

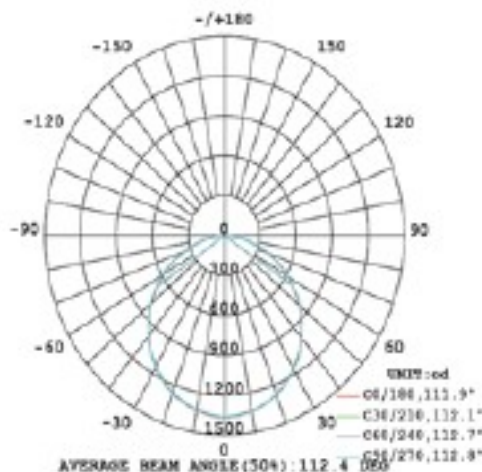



1 X 4

LED EdgeLit Panel

Cat#71752A

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .084A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 11.5%

Product Parameters:

40 Watts

Lumens: 4600

Efficacy: 112 Lumens Per Watt

50,000+ L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 120°

CRI: >83

R9:

DUV: .

Chromaticity (x,y):

Chromaticity (u,v):

Component Specifications:

LED: SMD2835

Driver: 50/60Hz

Driver Output Volts: DC25-42V

Driver Output Amps: 900mA

Dimming:

0-10V / PMW / VR

Operating Temperature:

Minimum Starting -22°F - 104°F

Construction:

Housing: Aluminum/Zinc Alloy Backplate & Aluminum Frame

IP Rating: IP20 Dry Location Rated

Lens Material: PMMA

Mounting: Ceiling Mount

Listings:

UL Listed: E492428

DLC #: PLGDECM1L758

Carton Qty: 4

Weight: 16 lb per carton; 4 lb per fixture

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).