




2 X 2 Panel Light Cat#71761A

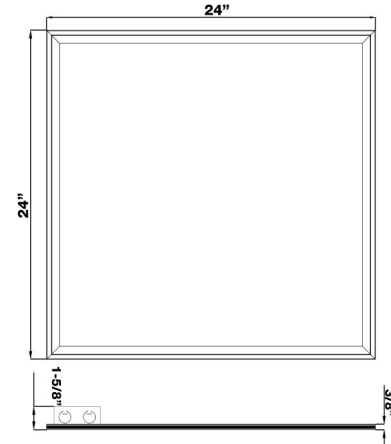

Features:

Replacement for office, hallway, conference room


Edgelit

PMMA light guide

Flicker Free Driver

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Light Pattern	Lumens/Watt	DLC #
71761A	White	40	4133	4000	120-277	0-10V	120°	105	PHHN8Z8X

PHOTOMETRY

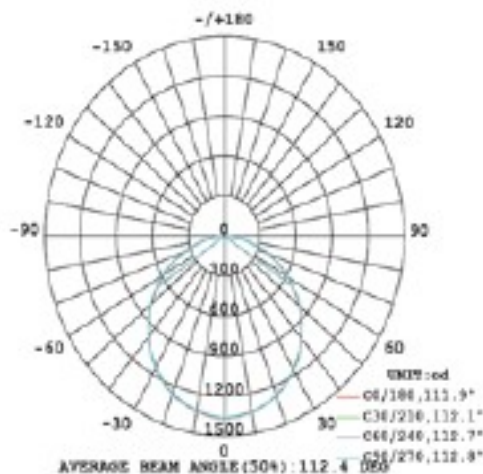



2 X 2

Panel Light

Cat#71761A

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .084A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 12.3

Product Parameters:

40 Watts

Lumens: 4133

Efficacy: 101 lumens per watt

50,000+ L70 Life Span

CCT: 4000K (Neutral White)

Chromaticity Measurements:

Beam Angle: 120°

CRI: >80

R9:

DUV: .

Chromaticity (x,y):

Chromaticity (u,v):

Component Specifications:

LED: SMDLM-80

Driver:

Driver Output Volts:

Driver Output Amps:

Dimming:

0-10V / PMW

Operating Temperature:

Minimum Starting -4°F - 113°F

Construction:

Housing: Die Cast Aluminum Housing

Powder Coated

IP Rating: IP40 Dry Location Rated

Lens Material: PMMA

Mounting: Ceiling Mount

Listings:

UL Listed: E492428

DLC #: PHHN8Z8X

Carton Qty: 4

Weight: 16 lb per carton; 4 lb per fixture

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).