

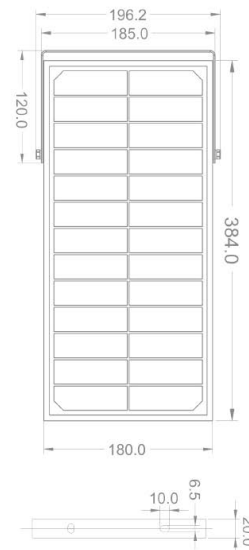





Solar Flood Light

60W, 4000K

Cat# 72537

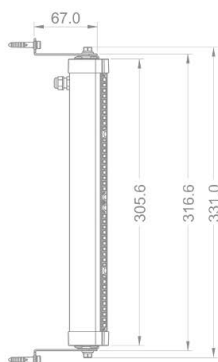


Features:

- High sensitivity Photosensor Switch (No Motion Sensor)
- 7.5 Hour Charge Time
- 3-5 Day Run Time
- Charging Temperature: 32°F -113°F
Discharging Temperature: -4°F-140°F
- 11FT Cord
- High Lumen Output LEDs
- Power Source: Epoxy Mono-Crystalline Solar Panel - 5W
- IP65 Wet Location Rated
- Easy Installation
- 2 Year Warranty


| Part# | CCT | Lumens | Light Pattern | Dimming |
|-------|-------|--------|---------------|---------|
| 72537 | 4000K | 6,000 | 120° | N/A |

PHOTOMETRY


Road Simulated Diagram

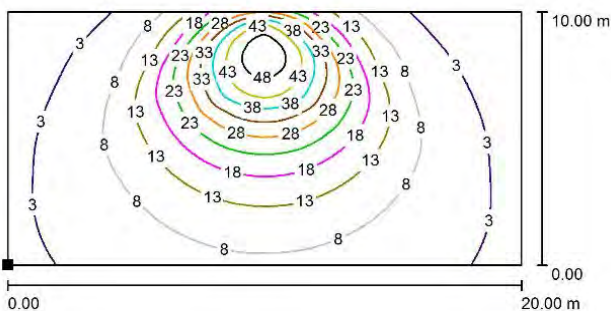

Illumination Curve



Luminance Distribution





Solar Flood Light

60W, 4000K

MORRIS# 72537

Technical Specifications:

Electrical:

Power: Epoxy Mono-Crystalline, 14V/5W

Product Parameters:

Wattage: 60W

Solar Panel :10W

CCT: 4000K (Neutral White)

PC Sensor Specifications:

Beam Angle: 120°

Component Specifications:

LED: SMD 2835

Comes with Li-ion Battery

Capacity: 3.7V28.86WH 2.6AH/PC

Charging/Discharging Temp:

32-113°F / -4°-140°F

Charging Time: 7.5 hours

Ra 80+

Non-Dimmable

Temperature Ratings:

Operating Temperature: -4°F to 140°F

Charging Temperature: 32°F -113°F

Discharging Temperature: -4°F-140°F

Construction:

Housing: Thermal Conductive Plastic

IP Rating: IP65 Wet Location Rated

Mounting: Wall Mount

Carton Qty: 1

Warranty:

Morris Products carries a 2 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).