




# MORRIS CAT#: 72586A

## LED Square Security Flood Light

### 120-277V, 40W, 5000K


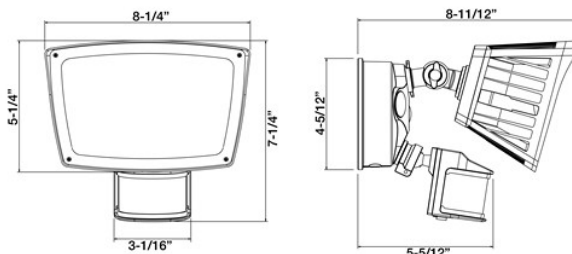


#### Features:

- Single Head Configuration
- Turns Lights on Automatically When Motion is Detected
- Ideal for Walkways, Entrances, Backyards and Patios
- Provides Years of Trouble Free Service
- 270° Detection Angle out to 60Ft
- Adjustable Motion & Light Sensitivity & Time Delay
- Durable Die Cast Aluminum IP65 Weather Resistant Housing
- Clear Polycarbonate Lens
- High Temperature Silicone Gasketing
- Fluted Prismatic Reflector
- Beam Angle: 100°
- Operating Temperature: -4°F to 122°F
- Listings: cETLus
- 5 Year Warranty

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	
72584A	40W	120-277	4,276	5000K	>80	N/A	Outdoor	107lm/w	

#### PHOTOMETRY

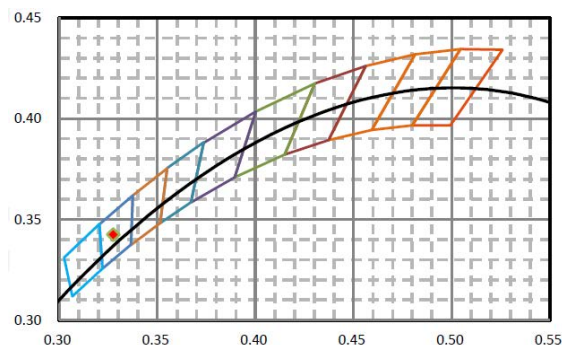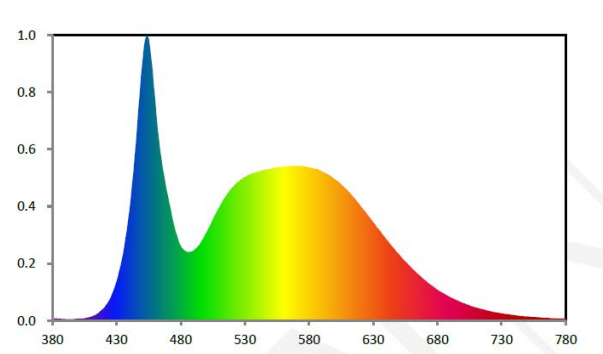



# MORRIS CAT#: 72586A

## LED Square Security Flood Light

### 120-277V, 40W, 5000K

#### **Technical Specifications:**

##### **Electrical:**

Input Voltage: 120V-277V

Current: .27A@120V

Frequency: 50/60Hz

Power Factor:  $\geq .98$

THD:  $>20\%$

##### **Product Parameters:**

Input Watts: 40W

Lumens: 4,276

Efficacy: 107 lumens per watt

30,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

##### **Chromaticity Measurements:**

Beam Angle: 100°

CRI: 80

R9: 16

##### **Component Specifications:**

LED: Lumileds 3030

120-277V, 50-60Hz

**Dimming:** N/A

##### **Operating Temperature:**

Minimum Starting: -4°F to 122°F

##### **Construction:**

Housing: Durable Die Cast Aluminum

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Polycarbonate

**Mounting:** Wall or Eve Mounted to  
Standard Junction Box

**Listings:** cETLus

##### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).