

MORRIS CAT#: 72638

6" NEW CONSTRUCTION DOWNLIGHT


CCT AND WATTAGE TUNABLE 120-277V 3K-5K 10W/15W/22W









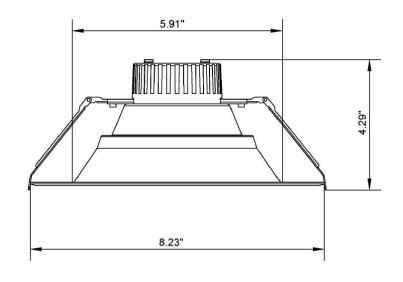


Features:


- 1. Aluminum Housing/Trim Paintable
- 2. Guaranteed Single Bin Color Consistency Enhanced Illumination Uniformity
- 3. Torsion Spring Brackets for Recessed Mounting to Sheetrock
- 4. Wattage Tunable
- 5. Built in Color / Wattage Tuning Switch

- 6. IC (Insulation Contact) Rated
- 7. Energy Star and cETLus Listed
- 8. IP44 Damp Location Rated
- 9. 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	ССТ	Voltage	Input Current	Lumens/ Watt	Energy Star
72638	White	10W	1,750	3000K	120-277V	.17A	98	Yes

Photometrics:







MORRIS CAT#: 72638 NEW CONSTRUCTION DOWNLIGHT 6" 3K-5K 10W/15W/22W

Technical Specifications:

Electrical: Operating Temperature:

Input Voltage: 120-277V Minimum Starting -31° - 122° F

Current: .17A @ 120V
Frequency: 50-60Hz

Construction:

Power Factor: >.9 Housing: Aluminum Housing/Trim - White Finish

Product Parameters:

Wattage: 10W/15W/22W IP Rating: IP44 Indoor Wet Location Rated

Efficacy: 98 lm/ watt

50 000+ LFD Life Span

Lens Material: Frosted Polycarbonate Lens

50,000+ LED Life Span

Lens Material: Frosted Polycarbonate Lens

CCT: 3K-5K

Mounting: Ceiling Mount
(Drywall / Sheetrock)

Beam Angle: 97.5° Listings: cETLus, Energy Star

CRI: 94.8 Carton Qty: 12 R9: 70 Weight: 1.7 lb

Component Specifications:

Driver: 120-277V Warranty:
50-60HZ Morris Products carries a 5 year warranty from date of

50-60HZ Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal

Driver Output Amps:

Dimming: N/A

Surge Protection:

LED: SMD2835