




# 74026C - LED AREA LIGHT SHOEBOX GEN 4


120-277V 300W 5000K




Twist Lock Receptacle & Shorting Cap Included  
Photocell Sold Separately - Cat# 39106

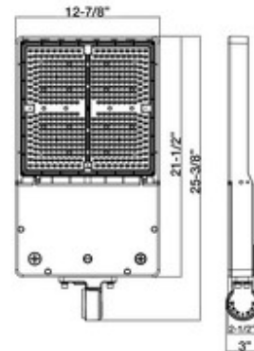

Adapter  
Included with fixture

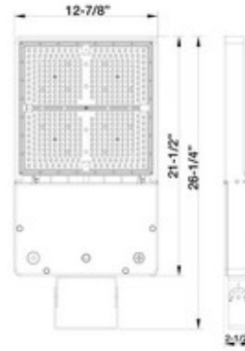

Trunnion  
Sold Separately

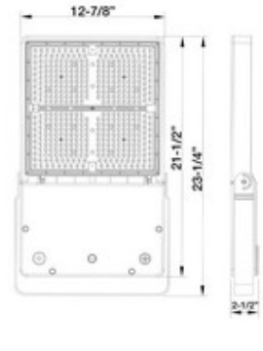

Yoke  
Sold Separately

240-300W

## FEATURES:

- SMD 3030 LEDs
- Corrosion resistant Die Cast Aluminum housing
- Polycarbonate Optic Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo Control must be Purchased Separately
- Light Pattern: Type III
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC PRODUCT ID#: PG4QPKZ6
- 5 Year Warranty





Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Beam Angle	Lumens/Watt	DLC PRODUCT ID#:
74026C	Bronze	300W	44,053	5000K	120-277V	144°	146lm/w	PG4QPKZ6



# 74026C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 300W 5000K

## PHOTOMETRY:

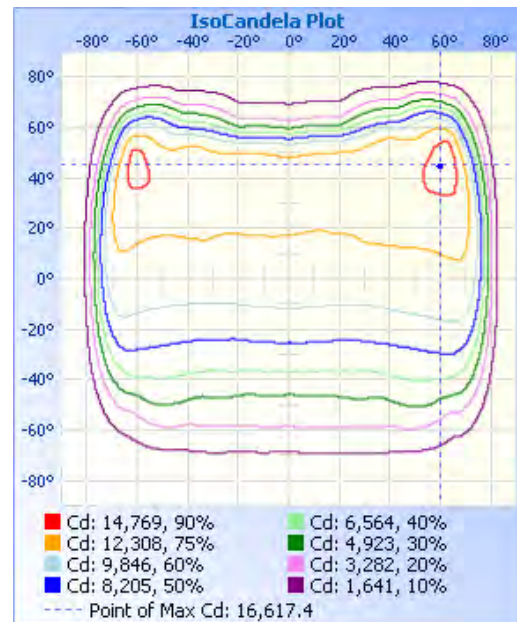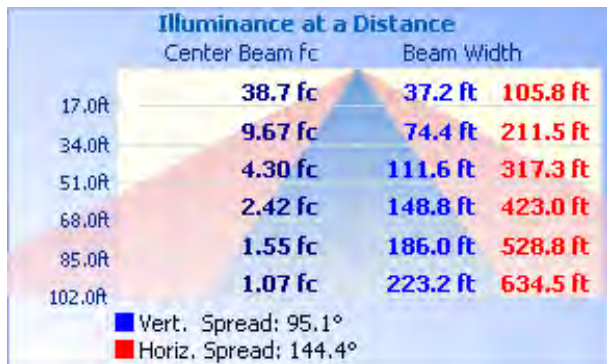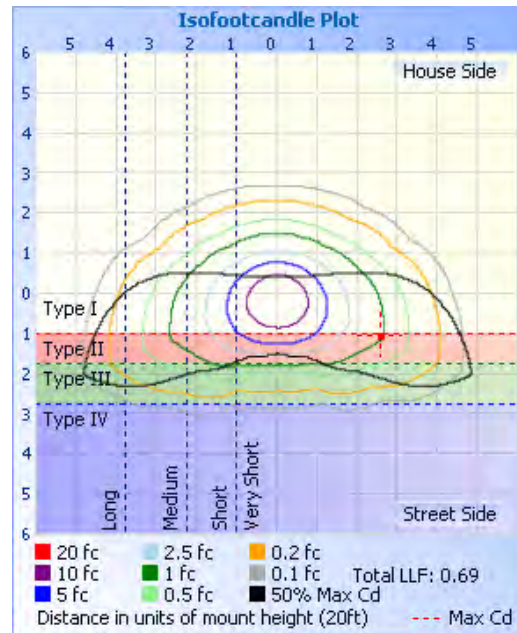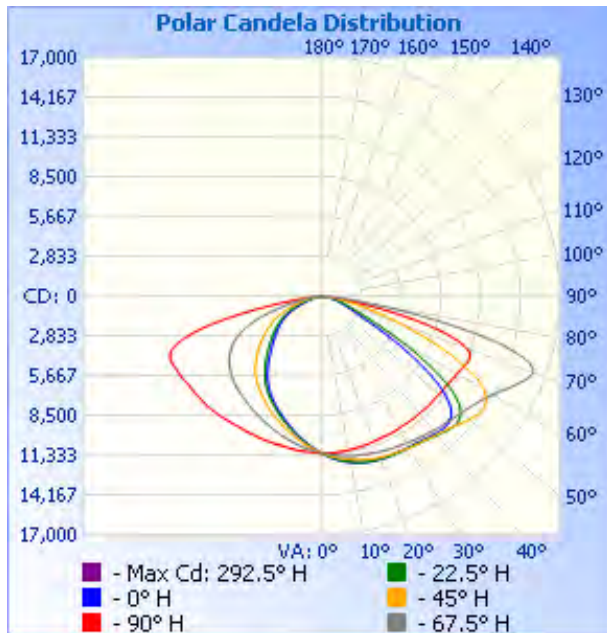



# 74026C - LED AREA LIGHT SHOEBOX GEN 4

120-277V 300W 5000K

## Technical Specifications:

### Electrical:

Input Voltage: 120-277V

Current: 1.13A @ 277V

Frequency: 60Hz

Power Factor:  $\geq 0.9$

THD: 9% @ 277V

### Product Parameters:

300 Watts

Efficacy: 146 lumens per watt

50,000+ LED Life Span

CCT: 5000K

### Chromaticity Measurements:

Beam Angle: 144°

CRI: 71

R9: -36

DUV: 0.0015

Chromaticity (x,y):  $x=0.3353$ ;  $y=0.3465$

Chromaticity (u,v):  $u=0.2067$ ;  $v=0.4807$

### Component Specifications:

LED: SMD3030

Driver Voltage: 120-277V

Frequency: 50-60HZ

**Dimming:** 0-10V

### **\*Photo Control:**

Twist lock receptacle and shorting included.

Photocell sold separately.

LED Twist-Lock Style Photocells: **39106** (120-277V)

LED Twist-Lock Style Photocells: **39107** (480V)

\*Twist lock receptacle is installed on fixture and shorting cap is include in the box

### Operating Temperature:

Minimum Starting: -22°F To 122°F

### Construction:

Housing: Corrosion resistant Die Cast Aluminum housing

IP Rating: IP65 Wet Location Rated

Lens Material: Polycarbonate

EPA: 2.51 ft<sup>2</sup>

Weight: 16.3lbs

Mounting Accessories Sold Separately

### Listing:

cULus

DLC PRODUCT ID#: PG4QPKZ6

### Accessories (Sold Separately):

- Pole Arm Mount (80-300W) Bronze - For Round and Square Poles - CAT#: 74032A
- Slipfitter Mount (80-300W) Bronze - CAT#: 74034A
- Trunnion Mount (80-300W) Bronze - CAT#: 74038C
- Universal Mount (80-300W) Bronze - CAT#: 74043A
- Yoke Mount (240-300W) Bronze - CAT#: 74737C
- Microwave Motion Sensor (**120-277V and 480V Only**) - CAT#: 74072C
- Microwave Motion Sensor Remote (Optional, for use with 74072C) -CAT#: 74188B

### Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).