




MORRIS #: 74199

LED UFO HIGH BAY LIGHT

120-277V, 3000K-5000K, WHITE

160W/200W/240W

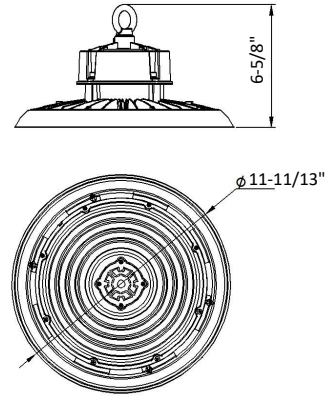


Features:

- Wattage Tunable: 160W, 200W, 240W
- Color Tunable: 3000K, 4000K, 5000K
- Input Voltage: 120/208/240/277VAC
- Corrosion Resistant Die Cast Aluminum Housing
- Integral Cooling Fin Releases Heat Efficiently to maintain the life of the LEDs/Driver
- Stainless Steel Hardware
- 60" Wire Whip for Easy Install
- Operating Temperature: -40°F to 122°F
- Eye-Hook Mount - 1/2" Thread - Included
- IP65 (NEMA 4X) Dust & Water Tight
- 50,000+ Hour LED Life Expectancy
- Listings: cULus
- 5 Year Warranty


Part#	Wattage	Voltage	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	
74199	160/200/240W	120-277V	33,740	3K;4K;5K	80+	0-10V	90°	141	

PHOTOMETRY

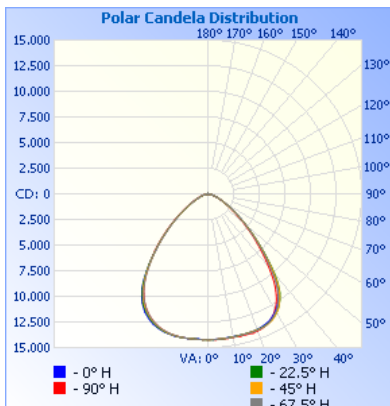

Illuminance at a Distance			
	Center Beam fc	Beam Width	
17.0ft	49.2 fc	30.2 ft	33.1 ft
34.0ft	12.3 fc	60.4 ft	66.1 ft
51.0ft	5.5 fc	90.6 ft	99.2 ft
68.0ft	3.1 fc	120.8 ft	132.2 ft
85.0ft	2.0 fc	151.0 ft	165.3 ft
102.0ft	1.4 fc	181.2 ft	198.4 ft

■ Vert. Spread: 83.2°
■ Horiz. Spread: 88.4°

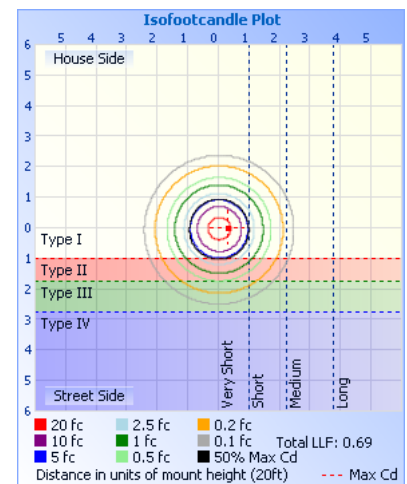



MORRIS #: 74199

LED UFO HIGH BAY LIGHT

120-277V, 3000K-5000K, WHITE

160W/200W/240W

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277
Current: 2.11A @ 120V;200W
Frequency: 50/60Hz
Power Factor: ≥ 0.9
THD: $>11\%$ @ 120V

Product Parameters:

160/200/240 Watts
Lumens: 33,740
Efficacy: 141 Lumens Per Watt
50,000+ L70 Life Span
CCT: 3K (WW); 4K (NW); 5K (CW)

Chromaticity Measurements:

Beam Angle: 90°
CRI: 80+
R9: 13
DUV: -0.00070
Chromaticity (x,y): $x=0.4041$ $y=0.3849$
Chromaticity (u,v): $u=0.2361$ $v=0.5102$

Component Specifications:

LED: Seoul 2835
Driver: 120V 50/60Hz
Driver Output Volts: 150V/DC
Driver Output Amps: 1.0A
2KV Surge Protection

Dimming:

0-10V / PWM

Operating Temperature:

Minimum Starting -31°F - 122°F

Construction:

Housing: Die Cast Aluminum Housing
Powder Coated
IP Rating: IP65 Damp Location Rated

Lens Material: PC

Mounting: Ceiling Mount, Surface Mount; Pendant Mount, Eye Hook

Listings: cULus; DLC 5.1

Accessories (Sold Separately)

CAT#: 74110B - Black U-Bracket - 100W-150W Fixtures
CAT#: 74112B - Black U-Bracket - 200W-240W Fixtures
CAT#: 74135C - Wire Guard - 100W-150W Fixtures
CAT#: 74137C - Wire Guard - 200W-240W Fixtures
CAT#: 74187B - Microwave Motion Sensor - 120-277V Fixtures
CAT#: 74186B - PIR Sensor - 120-277V Fixtures
CAT#: 74188B - Remote Control - PIR and Microwave Motion Sensors
CAT#: 74196 - Emergency Battery Backup - 120-277V Only
CAT#: 74119B - 90° Aluminum Reflector - 100W-150W Fixtures
CAT#: 74121B - 90° Aluminum Reflector - 200W-240W Fixtures
CAT#: 74123B - 90° PC reflector - 100W-150W Fixtures
CAT#: 74125B - 90° PC reflector - 200W-240W Fixtures
CAT#: 74149B - 90° PC bottom cover - 100W-150W Fixtures
CAT#: 74152B - 90° PC bottom cover - 200W-240W Fixtures
CAT#: 74143 - $1/2"$ - $3/4"$ NPT conduit adaptor

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).