




Driverless LED Classic Wallpack

45W 120-277V 5000K

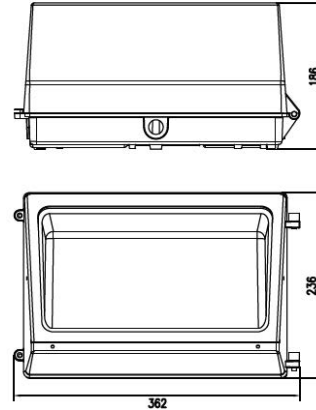


Features:

Driverless Design eliminates premature driver failure, significantly increases fixture life expectancy at high ambients.

- 5 year warranty at 55°C/131°F
- 2X to 10X fixture life expectancy compared to traditional LED fixtures
- Higher maximum ambient operating temperature range vs traditional LED fixtures
- 5050 LED package - superior lumen output and heat dissipation
- Universal Voltage 120V through 277V (no 208V)
- 0-10V Dimmable
- Superior Lumen (L70) and Color Maintenance over time compared to traditional LED fixtures
- Eliminates driver generated noise and harmonics - Eliminates maintenance costs
- 10KV Surge Suppression standard
- Bronze Diecast Aluminum Housing
- Heat Resistant Directed Optics - Borosilicate Glass
- Excellent Heat Dissipation - Maximum Life Expectancy

Cat#	Wattage	Volts	Lumens	CCT	CRI	Dimming	Lumens/ Watt	Distribution	
71100	45	120-277	4,959	5000K	70	0-10V/PWM/VR	112	100° X 100°	

Note: No 208V

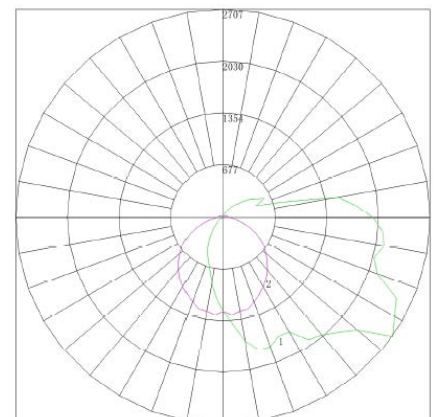



Driverless LED Classic Wallpack

45W 120-277V 5000K



Technical Specifications:

Electrical:

Input Voltage: 120-277 (no 208V)
Current: .368A@120V
Power Factor: .99
THD: 9% @ 120V

Product Parameters:

Watts: 45
Lumens: 4,959
Efficacy: 112 lumens per watt
50,000+ Hour L70 Life Span
CCT: 5000K (Cool White)

Chromaticity

Measurements:

Beam Angle: 100° X 100°
CRI: 75
R9: -10
DUV: .00017
Chromaticity (x,y): x=.3819; y=.3807
Chromaticity (u,v): u=.2245; v=.3663

Component

Specifications:

LED: Lumiled 3030
Driver: 100-277V (no 208V)
50-60 Hz Class 2
Driver Output Volts: 120-277V
Driver Output Amps: 380 mA
Input Volts: 6.5V
Input Amps: 60 mA
Surge Suppression: 10 KV

Dimming: 0-10V/PWM/VR

Operating Temperature:

Minimum Starting -40°F - 140°F

Construction:

Housing: ADC 12 Aluminum Alloy Powder Coated
IP Rating: IP65 suitable for wet locations

4 threaded KOs for conduit entrance or Photocell installation

Lens Material: Heat Resistant Borosilicate Glass

UV Resistant Fire Resistant

Listings: UL Listed: E474299

Accessories:

GlareShield: 71108
WireGuard: 71111

Weight: 10 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).