


LED DriverLess Classic Wallpacks

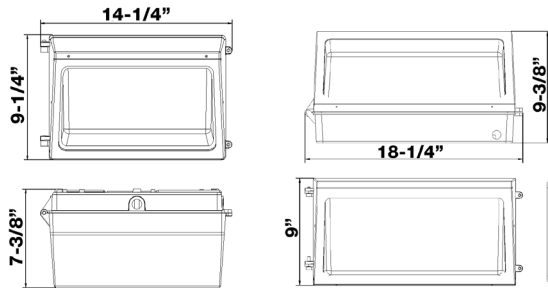

- DriverLess Design - No Capacitor
- True 100,000+ Hr Lifetime
- Operational up to 60°C (140°F)
- Highest Quality, Longest Life Light Engine Components Available
- Input Voltage: 120-277 VAC, Excludes 208V
- Lumileds LUXEON 3030 LEDs
- 0-10V Dimmable
- 10KV Surge Suppression
- Die Cast Aluminum Housing - Bronze Finish
- High Impact Heat Resistant Borosilicate Glass
- 45W-80W - 4 Threaded Apertures - (1)Bottom, (1)Back, (2)Sides
- 100W - 150W - 5 Threaded Apertures - (1)Bottom, (1) Top, (1)Back, (2)Sides
- Stainless Steel Hardware
- Operation Temperature: -40°F to 140°F
- Photo Control (not included) can be installed on fixture
- Color Temperature: 5000K Cool White
- CRI: >73; Power Factor: >0.90
- IP54 (NEMA 3) Dust & Water Tight - Listed for Wet Locations
- cETLus Listed; DLC Listed
- 120W & 150W are not DLC Listed
- Glare Shield/Visor (Order Separately for Full Cutoff Applications)


CAT. NO.	WATTS	HOUSING COLOR	DELIVERED LUMENS	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY	EACH
71100	45	BRONZE	4,959	150W	9	1	
71101	60	BRONZE	6,714	175W	9	1	
71102	80	BRONZE	8,892	250W	9	1	
71103	100	BRONZE	10,567	300W	16	1	
71104*	120	BRONZE	14,000	400W	16	1	
71105*	150	BRONZE	17,500	400W	16	1	

ACCESSORIES

71108	SMALL GLARE SHIELD 45W THRU 80W		3	1	
71109	LARGE GLARE SHIELD 100W THRU 150W		3	1	
71111	SMALL WIRE GUARD 45W THRU 80W		3	1	
71113	LARGE WIRE GUARD 100W THRU 150W		3	1	

* NOT DLC LISTED

LED DriverLess Full Cutoff Wallpacks

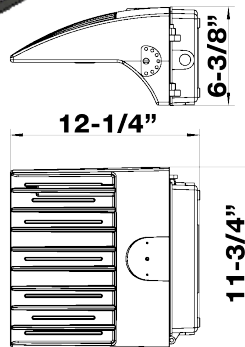

- DriverLess Design - No Capacitor
- True 100,000+ Hr Lifetime
- Operational up to 60°C (140°F)
- Highest Quality, Longest Life Light Engine Components Available
- Input Voltage: 120-277 VAC, Excludes 208V
- Lumileds LUXEON 3030 LEDs
- 10KV Surge Suppression
- Die Cast Aluminum Housing - Bronze Finish
- High Impact Heat Resistant Tempered Glass
- 4 Threaded Apertures - (1)Top, (1)Back, (2)Sides
- Stainless Steel Hardware
- Operation Temperature: -40°F to 140°F
- Photo Control (not included) can be installed on fixture
- Color Temperature: 5000K Cool White
- CRI: 73; Power Factor: >0.90
- IP54 (NEMA 3) Dust & Water Tight - Listed for Wet Locations
- cULus Listed; DLC Listed

CAT. NO.	WATTS	HOUSING COLOR	DELIVERED LUMENS	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY	EACH
71106	50	BRONZE	5,778	150	10	1	
71107	100	BRONZE	10,823	400W	10	1	