




# Full Cutoff Driverless WallPack

## 100W, 120-277V, 5000K

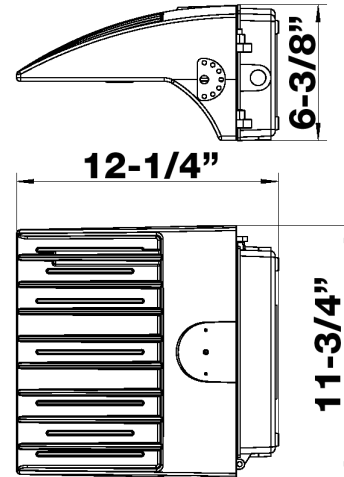


### Features:

**Driverless Design** eliminates premature driver failure, significantly increases fixture life expectancy at high ambients.

- 5 year warranty at 55°C/131°F
- 2X To 10X longer fixture life expectancy compared to traditional LED fixtures
- Higher maximum ambient operating temperature range vs traditional LED fixtures
- 5050 LED package - superior lumen output and heat dissipation
- Universal Voltage 120V through 277V (No 208V)
- Superior Lumen (L70) and Color Maintenance over time compared to traditional LED fixtures
- Eliminates driver generated noise and harmonics - Eliminates maintenance costs
- 10KV Surge Suppression standard
- Bronze Diecast Aluminum Housing
- Heat Resistant Directed Optics - Polycarbonate
- Excellent Heat Dissipation - Maximum Life Expectancy

Cat#	Wattage	Volts	Lumens	CCT	CRI	Dimming	Lumens/ Watt	Light Distribution	
71107	100	120-277	10,823	5000K	72	0-10V/PWM/VR	108	H122° x V60°	

**Note: No 208V**

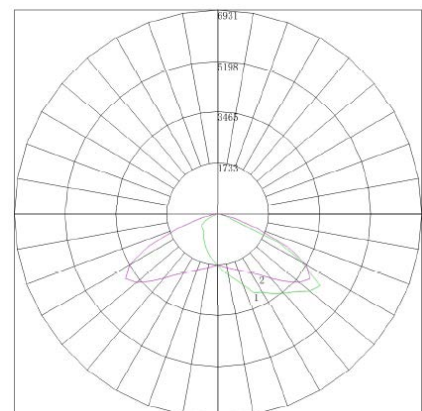



# Full Cutoff Driverless WallPack

## 100W, 120-277V, 5000K



### **Technical Specifications:**

#### **Electrical:**

Input Voltage: 120-277V (No 208V)

Current: .79A@120V

Frequency: 50/60Hz

Power Factor: .99

THD: 11%

#### **Product Parameters:**

Watts: 100

Lumens: 10,823

Efficacy: 108 Lumens/Watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

#### **Chromaticity Measurements:**

Beam Angle: H122° x V60°

CRI: 72

R9: -14

DUV: -.00015

Chromaticity (x,y): x=.3742; y=.3697

Chromaticity (u,v): u=.2238; v=.3317

#### **Component**

#### **Specifications:**

LED: Seoul 5050

Driver: 100-277V (No 208V)

50-60 Hz

Class 2

Driver Output Volts: N/A

Driver Output Amps: 840 mA

LED Input Volts: 16-20V

LED Input Amps: 150 mA

Surge Suppression: 10 KV

#### **Operating Temperature:**

Minimum Starting -40°F - 140°F

#### **Construction:**

Housing: ADC 12 Aluminum Alloy Powder Coated

IP Rating: IP54 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

UV Resistant

Fire Resistant

**Listings:** UL Listed: E474299

Weight: 12 lb

#### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

[www.morrisproducts.com](http://www.morrisproducts.com)