






2x4 LED Backlit Panel 50W MORRIS# 71169

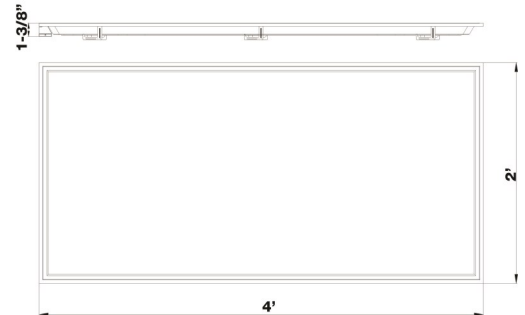


Features:

- Replacement for office, hallway, conference room
- Aluminum/Zinc Alloy Backplate & Aluminum Frame
- 6 Step McAdam Ellipse Binning QC Program
- Dimmable
- SMD 2835 LEDs
- Operating Temperature: 14°F - 104°F
- PMMA Diffuser
- IP20 Dry Location Rated
- 5 Year Warranty

Part#	CCT	Lumens	Voltage	Beam Angle	Dimming	Lumens/Watt	DLC #
71169	4000K	5,073	120-277	110°	0-10V	107	P5LWMV3W

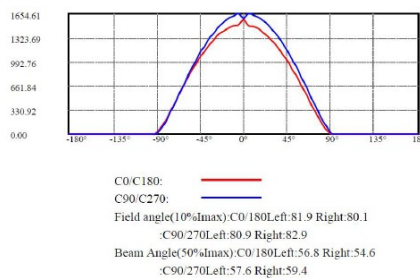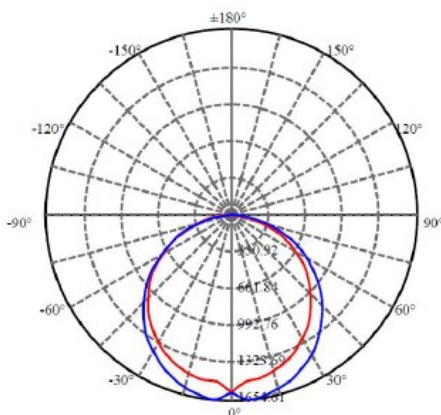

Lux distance Curve

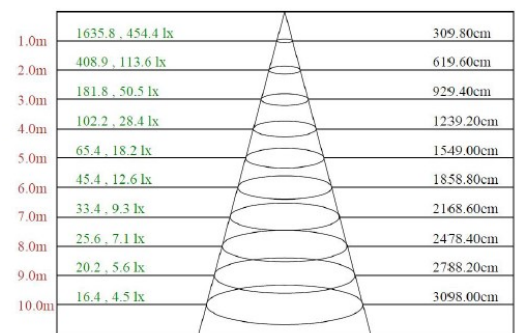

Max , Ave Beam angle of C90 plane 114.31



2x4 LED Backlit Panel 50W MORRIS# 71169

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .37A @ 120V

Frequency: 60Hz

Power Factor: ≥ 0.9

THD: 13.2%

Product Parameters:

Lumens: 5,073

Wattage: 50W

Efficacy: 107 Lumens Per Watt

50,000+ LED Life Span

Color Temp: 4000K

Chromaticity Measurements:

Beam Angle: 110°

CRI: >82

R9: 6

DUV: +0.00084

Chromaticity (x,y): $x=.4361$; $y=.4059$

Chromaticity (u,v): $u=.2492$; $v=.522$

Component Specifications:

LED: SMD2835

Driver: 120-277V 50-60HZ

Driver Output Volts: 27-42VDC

Driver Output Amps: 1150mA

1KV Surge Protection

Dimming:

0-10V

Operating Temperature:

Minimum Starting 14°F - 104°F

Construction:

Housing: Aluminum/Zinc Alloy Backplate & Aluminum Frame

Powder Coated

IP Rating: IP20 Dry Location Rated

Lens Material: PMMA

Mounting:

Listings: cETLus Listed

DLC: P5LWMV3W

Carton Qty: 1

Weight:

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).